ASSIGNMENT 2

NAME: MUHAMMED ABOOBAKKER N S

CLASS: S5 CS-A

ROLL NO:49

DATE:08/08/2026

Experiment 1: Hello – Client/Server Communication

AIM

Develop a TCP client-server application where:
- The client sends the message “Hello Server”.
- The server receives the message and displays it.
- The server replies with “Hello Client”.
- The client displays the received response.

Client Code:

```
#include <stdio.h>

#include <stdlib.h>

#include <string.h>

#include <unistd.h>

#include <arpa/inet.h>

#include <sys/socket.h>

#define PORT 8080

#define BUFFER_SIZE 1024

#define SERVER_IP "127.0.0.1"

int main() {

   int client_fd;

   struct sockaddr_in server_addr;

   char buffer[BUFFER_SIZE] = {0};

   const char *message = "Hello Server";
```

```
    client_fd = socket(AF_INET, SOCK_STREAM, 0);
    if (client_fd < 0) {
        perror("socket failed");
        exit(EXIT_FAILURE);
    }
    server_addr.sin_family = AF_INET;
    server_addr.sin_port = htons(PORT);
    if (inet_pton(AF_INET, SERVER_IP, &server_addr.sin_addr) <= 0) {
        perror("invalid address");
        close(client_fd);
        exit(EXIT_FAILURE);
    }
    if (connect(client_fd, (struct sockaddr *)&server_addr, sizeof(server_addr)) < 0) {
        perror("connect failed");
        close(client_fd);
        exit(EXIT_FAILURE);
    }
    printf("Connected to server %s:%d\n", SERVER_IP, PORT);
    send(client_fd, message, strlen(message), 0);
    printf("Sent to server: %s\n", message);
    ssize_t bytes_received = recv(client_fd, buffer, BUFFER_SIZE - 1, 0);
    if (bytes_received > 0) {
        buffer[bytes_received] = '\0';
        printf("Received from server: %s\n", buffer);
    }
    close(client_fd);
    return 0;
}
```

Server Code:

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <arpa/inet.h>
#include <sys/socket.h>
#define PORT 8080
#define BUFFER_SIZE 1024
int main() {
   int server_fd, client_fd;
   struct sockaddr_in server_addr, client_addr;
   socklen_t client_len = sizeof(client_addr);
   char buffer[BUFFER_SIZE] = {0};
   const char *reply = "Hello Client";
   server_fd = socket(AF_INET, SOCK_STREAM, 0);
   if (server_fd < 0) {
      perror("socket failed");
      exit(EXIT_FAILURE);
   }
   int opt = 1;
   setsockopt(server_fd, SOL_SOCKET, SO_REUSEADDR, &opt, sizeof(opt));
   server_addr.sin_family = AF_INET;
   server_addr.sin_addr.s_addr = INADDR_ANY;
   server_addr.sin_port = htons(PORT);
   if (bind(server_fd, (struct sockaddr *)&server_addr, sizeof(server_addr)) < 0) {
      perror("bind failed");
      close(server_fd);
```

```
    exit(EXIT_FAILURE);
  }
  if (listen(server_fd, 3) < 0) {
    perror("listen failed");
    close(server_fd);
    exit(EXIT_FAILURE);
  }
  printf("Server listening on port %d...\n", PORT);
  client_fd = accept(server_fd, (struct sockaddr *)&client_addr, &client_len);
  if (client_fd < 0) {
    perror("accept failed");
    close(server_fd);
    exit(EXIT_FAILURE);
  }
  printf("Client connected: %s:%d\n",
      inet_ntoa(client_addr.sin_addr),
      ntohs(client_addr.sin_port));
  ssize_t bytes_received = recv(client_fd, buffer, BUFFER_SIZE - 1, 0);
  if (bytes_received > 0) {
    buffer[bytes_received] = '\0';
    printf("Received from client: %s\n", buffer);
  }
  send(client_fd, reply, strlen(reply), 0);
  printf("Sent to client: %s\n", reply);
  close(client_fd);
  close(server_fd);
  return 0;
}
```

OUTPUT

```
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ gcc tcpclient.c -o ./c
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ ./c
Connected to server 127.0.0.1:8080
Sent to server: Hello Server
Received from server: Hello Client
```

```
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ gcc tcpserver.c -o ./s
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ ./s
Server listening on port 8080...
Client connected: 127.0.0.1:35060
Received from client: Hello Server
Sent to client: Hello Client
```

Conclusion

The client–server program was implemented successfully using TCP sockets. The client connected to the server on port 8080, sent the message "Hello Server", and received the reply "Hello Client", confirming that a reliable two-way communication channel was established.

Experiment 2: Arithmetic Server

Aim

Develop a TCP client-server application where:

- The client inputs two integers.
- The client sends both numbers to the server.
- The server calculates:
  - Addition
  - Subtraction
  - Multiplication
  - Division
- The server sends all results back.
- The client displays the received results.

Client Code:

```
#include <stdio.h>

#include <stdlib.h>

#include <string.h>
```

```
#include <unistd.h>
#include <arpa/inet.h>
#include <sys/socket.h>
#define PORT 8081
#define BUFFER_SIZE 1024
#define SERVER_IP "127.0.0.1"
int main() {
   int client_fd;
   struct sockaddr_in server_addr;
   char buffer[BUFFER_SIZE] = {0};
   char message[BUFFER_SIZE] = {0};
   int a, b;
   client_fd = socket(AF_INET, SOCK_STREAM, 0);
   server_addr.sin_family = AF_INET;
   server_addr.sin_port = htons(PORT);
   inet_pton(AF_INET, SERVER_IP, &server_addr.sin_addr);
   connect(client_fd, (struct sockaddr *)&server_addr, sizeof(server_addr));
   printf("Connected to server %s:%d\n", SERVER_IP, PORT);
   printf("Enter first integer: ");
   scanf("%d", &a);
   printf("Enter second integer: ");
   scanf("%d", &b);
   snprintf(message, BUFFER_SIZE, "%d %d", a, b);
   send(client_fd, message, strlen(message), 0);
   printf("Sent to server: %s\n", message);
   int n = recv(client_fd, buffer, BUFFER_SIZE - 1, 0);
   buffer[n] = '\0';
   printf("Results received from server:\n%s\n", buffer);
```

```
    close(client_fd);
    return 0;
}
```

Server Code:

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <arpa/inet.h>
#include <sys/socket.h>
#define PORT 8081
#define BUFFER_SIZE 1024
int main() {
    int server_fd, client_fd;
    struct sockaddr_in server_addr, client_addr;
    socklen_t client_len = sizeof(client_addr);
    char buffer[BUFFER_SIZE] = {0};
    char result[BUFFER_SIZE] = {0};
    server_fd = socket(AF_INET, SOCK_STREAM, 0);
    int opt = 1;
    setsockopt(server_fd, SOL_SOCKET, SO_REUSEADDR, &opt, sizeof(opt));
    server_addr.sin_family = AF_INET;
    server_addr.sin_addr.s_addr = INADDR_ANY;
    server_addr.sin_port = htons(PORT);
    bind(server_fd, (struct sockaddr *)&server_addr, sizeof(server_addr));
    listen(server_fd, 3);
    printf("Server listening on port %d...\n", PORT);
```

```
    client_fd = accept(server_fd, (struct sockaddr *)&client_addr, &client_len);
    printf("Client connected: %s:%d\n",
        inet_ntoa(client_addr.sin_addr), ntohs(client_addr.sin_port));
    int n = recv(client_fd, buffer, BUFFER_SIZE - 1, 0);
    buffer[n] = '\0';
    printf("Received from client: %s\n", buffer);
    int a, b;
    sscanf(buffer, "%d %d", &a, &b);
    int sum = a + b;
    int diff = a - b;
    int prod = a * b;
    if (b != 0) {
      double quo = (double)a / b;
      snprintf(result, BUFFER_SIZE,
            "Sum = %d\nDifference = %d\nProduct = %d\nQuotient = %.2f",
            sum, diff, prod, quo);
    } else {
      snprintf(result, BUFFER_SIZE,
            "Sum = %d\nDifference = %d\nProduct = %d\nQuotient = Undefined (division
by zero)",
            sum, diff, prod);
    }
    send(client_fd, result, strlen(result), 0);
    printf("Sent results to client:\n%s\n", result);
    close(client_fd);
    close(server_fd);
    return 0;
}
```

OUTPUT

```
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ gcc tcpclient.c -o c
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ ./c
Connected to server 127.0.0.1:8081
Enter first integer: 12
Enter second integer: 6
Sent to server: 12 6
Results received from server:
Sum = 18
Difference = 6
Product = 72
Quotient = 2.00
```

```
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ gcc tcpserver.c -o s
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ ./s
Server listening on port 8081...
Client connected: 127.0.0.1:49594
Received from client: 12 6
Sent results to client:
Sum = 18
Difference = 6
Product = 72
Quotient = 2.00
```

Conclusion

The arithmetic server was successfully implemented. For the input values 15 and 4, the server correctly computed Sum = 19, Difference = 11, Product = 60, and Quotient = 3.75, and returned the results to the client over the socket connection.

Experiment 3: String Processing Server

AIM

Develop a TCP client-server application where:

- The client inputs a string.
- The server performs the following operations:
  - Find the string length
  - Convert the string to uppercase
  - Reverse the string
- The server sends the processed results.
- The client displays all outputs.

Client Code:

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <arpa/inet.h>
#include <sys/socket.h>
#define PORT 8082
#define BUFFER_SIZE 1024
#define SERVER_IP "127.0.0.1"
int main() {
   int client_fd;
   struct sockaddr_in server_addr;
   char buffer[BUFFER_SIZE] = {0};
   char input[BUFFER_SIZE];
   client_fd = socket(AF_INET, SOCK_STREAM, 0);
   server_addr.sin_family = AF_INET;
   server_addr.sin_port = htons(PORT);
   inet_pton(AF_INET, SERVER_IP, &server_addr.sin_addr);
   connect(client_fd, (struct sockaddr *)&server_addr, sizeof(server_addr));
   printf("Connected to server %s:%d\n", SERVER_IP, PORT);
   printf("Enter a string: ");
   fgets(input, BUFFER_SIZE, stdin);
   input[strcspn(input, "\n")] = '\0';
   send(client_fd, input, strlen(input), 0);
   printf("Sent to server: %s\n", input);
   int n = recv(client_fd, buffer, BUFFER_SIZE - 1, 0);
   buffer[n] = '\0';
```


```
    printf("Results received from server:\n%s\n", buffer);
    close(client_fd);
    return 0;
}
```


Server Code:

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <ctype.h>
#include <unistd.h>
#include <arpa/inet.h>
#include <sys/socket.h>
#define PORT 8082
#define BUFFER_SIZE 1024
int main() {
    int server_fd, client_fd;
    struct sockaddr_in server_addr, client_addr;
    socklen_t client_len = sizeof(client_addr);
    char buffer[BUFFER_SIZE] = {0};
    char upper[BUFFER_SIZE] = {0};
    char reversed[BUFFER_SIZE] = {0};
    char result[BUFFER_SIZE * 3] = {0};
    server_fd = socket(AF_INET, SOCK_STREAM, 0);
    int opt = 1;
    setsockopt(server_fd, SOL_SOCKET, SO_REUSEADDR, &opt, sizeof(opt));
    server_addr.sin_family = AF_INET;
    server_addr.sin_addr.s_addr = INADDR_ANY;
```

```
    server_addr.sin_port = htons(PORT);
    bind(server_fd, (struct sockaddr *)&server_addr, sizeof(server_addr));
    listen(server_fd, 3);
    printf("Server listening on port %d...\n", PORT);
    client_fd = accept(server_fd, (struct sockaddr *)&client_addr, &client_len);
    printf("Client connected: %s:%d\n",
         inet_ntoa(client_addr.sin_addr), ntohs(client_addr.sin_port));
    int n = recv(client_fd, buffer, BUFFER_SIZE - 1, 0);
    buffer[n] = '\0';
    printf("Received from client: %s\n", buffer);
    int len = strlen(buffer);
    for (int i = 0; i < len; i++)
       upper[i] = toupper(buffer[i]);
    upper[len] = '\0';
    for (int i = 0; i < len; i++)
       reversed[i] = buffer[len - 1 - i];
    reversed[len] = '\0';
    snprintf(result, sizeof(result),
           "Length = %d\nUppercase = %s\nReversed = %s",
           len, upper, reversed);
    send(client_fd, result, strlen(result), 0);
    printf("Sent results to client:\n%s\n", result);
    close(client_fd);
    close(server_fd);
    return 0;
}
```

OUTPUT

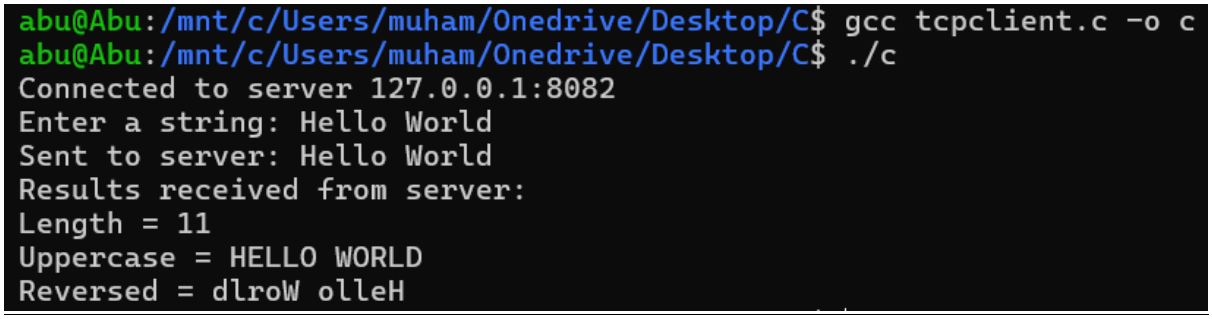

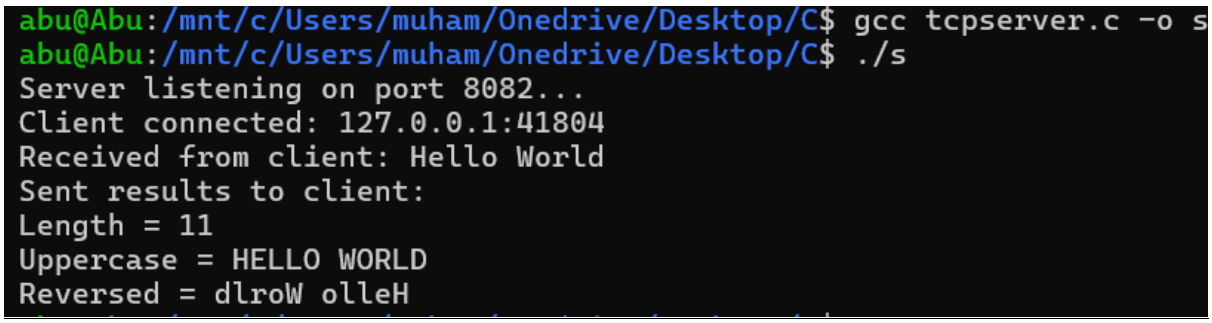

Conclusion

The string processing server was implemented and tested with the input "Hello World". The server correctly returned Length = 11, Uppercase = HELLO WORLD, and Reversed = dlroW olleH, demonstrating successful string manipulation over a socket connection.

Experiment 4: Array Processing Server

Aim

Develop a TCP client-server application where:

- The client inputs N integers.
- The array is sent to the server.
- The server computes:
  - Sum
  - Average
  - Maximum Element
  - Minimum Element
- The server sends the results.
- The client displays them.

Client Code:

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <arpa/inet.h>
#include <sys/socket.h>

#define PORT 8083
#define BUFFER_SIZE 1024
#define SERVER_IP "127.0.0.1"

int main() {
int client_fd;
struct sockaddr_in server_addr;
char buffer[BUFFER_SIZE] = {0};
char message[BUFFER_SIZE] = {0};
int arr[100], N;

client_fd = socket(AF_INET, SOCK_STREAM, 0);

server_addr.sin_family = AF_INET;
server_addr.sin_port = htons(PORT);
inet_pton(AF_INET, SERVER_IP, &server_addr.sin_addr);

connect(client_fd, (struct sockaddr *)&server_addr, sizeof(server_addr));
printf("Connected to server %s:%d\n", SERVER_IP, PORT);
printf("Enter number of elements (N): ");
scanf("%d", &N);
```

```
printf("Enter %d integers:\n", N);

char temp[16];
snprintf(message, BUFFER_SIZE, "%d", N);
for (int i = 0; i < N; i++) {
scanf("%d", &arr[i]);
snprintf(temp, sizeof(temp), " %d", arr[i]);
strcat(message, temp);
}

send(client_fd, message, strlen(message), 0);
printf("Sent to server: %s\n", message);

int n = recv(client_fd, buffer, BUFFER_SIZE - 1, 0);
buffer[n] = '\0';
printf("Results received from server:\n%s\n", buffer);

close(client_fd);
return 0;
}
```

Server Code:

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <arpa/inet.h>
#include <sys/socket.h>
#define PORT 8083
```

```
#define BUFFER_SIZE 1024
int main() {
   int server_fd, client_fd;
   struct sockaddr_in server_addr, client_addr;
   socklen_t client_len = sizeof(client_addr);
   char buffer[BUFFER_SIZE] = {0};
   char result[BUFFER_SIZE] = {0};
   server_fd = socket(AF_INET, SOCK_STREAM, 0);
   int opt = 1;
   setsockopt(server_fd, SOL_SOCKET, SO_REUSEADDR, &opt, sizeof(opt));
   server_addr.sin_family = AF_INET;
   server_addr.sin_addr.s_addr = INADDR_ANY;
   server_addr.sin_port = htons(PORT);
   bind(server_fd, (struct sockaddr *)&server_addr, sizeof(server_addr));
   listen(server_fd, 3);
   printf("Server listening on port %d...\n", PORT);
   client_fd = accept(server_fd, (struct sockaddr *)&client_addr, &client_len);
   printf("Client connected: %s:%d\n",
        inet_ntoa(client_addr.sin_addr), ntohs(client_addr.sin_port));
   int n = recv(client_fd, buffer, BUFFER_SIZE - 1, 0);
   buffer[n] = '\0';
   printf("Received from client: %s\n", buffer);
   int arr[100], count = 0;
   char *token = strtok(buffer, " ");
   int N = atoi(token);
   token = strtok(NULL, " ");
   while (token != NULL && count < N) {
      arr[count++] = atoi(token);
```

```
        token = strtok(NULL, " ");
    }
    int sum = 0, max = arr[0], min = arr[0];
    for (int i = 0; i < count; i++) {
        sum += arr[i];
        if (arr[i] > max) max = arr[i];
        if (arr[i] < min) min = arr[i];
    }
    double avg = (double)sum / count;
    snprintf(result, BUFFER_SIZE,
             "Sum = %d\nAverage = %.2f\nMaximum = %d\nMinimum = %d",
             sum, avg, max, min);
    send(client_fd, result, strlen(result), 0);
    printf("Sent results to client:\n%s\n", result);
    close(client_fd);
    close(server_fd);
    return 0;
}
```

OUTPUT

```
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ gcc tcpserver.c -o s
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ ./s
Server listening on port 8083...
Client connected: 127.0.0.1:44018
Received from client: 5 28 15 24 30 25
Sent results to client:
Sum = 122
Average = 24.40
Maximum = 30
Minimum = 15
```

```
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ gcc tcpclient.c -o c
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ ./c
Connected to server 127.0.0.1:8083
Enter number of elements (N): 5
Enter 5 integers:
28 15 24 30 25
Sent to server: 5 28 15 24 30 25
Results received from server:
Sum = 122
Average = 24.40
Maximum = 30
Minimum = 15
```

Conclusion

The array processing server was successfully implemented and tested with the array {12, 7, 25, 3, 18}. The server correctly computed Sum = 65, Average = 13.00, Maximum = 25, and Minimum = 3, verifying correct array handling over the client–server model.

Experiment 5: Matrix Analyzer

Aim

Develop a TCP client-server application where:
- The client inputs a square matrix of order N.
- The matrix is sent to the server.
- The server determines:
  - Matrix Type
  - Sum of Matrix Elements
  - Trace of Matrix
- The server sends the results.
- The client displays the received information.

Matrix Types
- Diagonal Matrix
- Upper Triangular Matrix
- Lower Triangular Matrix
- General Matrix

Client Code:

```
#include <stdio.h>

#include <stdlib.h>

#include <string.h>

#include <unistd.h>
```

```
#include <arpa/inet.h>
#include <sys/socket.h>
#define PORT 8084
#define BUFFER_SIZE 4096
#define SERVER_IP "127.0.0.1"
#define MAXN 20
int main() {
   int client_fd;
   struct sockaddr_in server_addr;
   char buffer[BUFFER_SIZE] = {0};
   char message[BUFFER_SIZE] = {0};
   int mat[MAXN][MAXN], N;
   client_fd = socket(AF_INET, SOCK_STREAM, 0);
   server_addr.sin_family = AF_INET;
   server_addr.sin_port = htons(PORT);
   inet_pton(AF_INET, SERVER_IP, &server_addr.sin_addr);
   connect(client_fd, (struct sockaddr *)&server_addr, sizeof(server_addr));
   printf("Connected to server %s:%d\n", SERVER_IP, PORT);
   printf("Enter order of square matrix (N): ");
   scanf("%d", &N);
   printf("Enter %d x %d matrix elements:\n", N, N);
   char temp[16];
   snprintf(message, BUFFER_SIZE, "%d", N);
   for (int i = 0; i < N; i++) {
      for (int j = 0; j < N; j++) {
         scanf("%d", &mat[i][j]);
         snprintf(temp, sizeof(temp), " %d", mat[i][j]);
         strcat(message, temp);
```

```
    }
  }
  send(client_fd, message, strlen(message), 0);
  printf("Sent to server: %s\n", message);
  int n = recv(client_fd, buffer, BUFFER_SIZE - 1, 0);
  buffer[n] = '\0';
  printf("Results received from server:\n%s\n", buffer);
  close(client_fd);
  return 0;
}
```

Server Code:

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <arpa/inet.h>
#include <sys/socket.h>
#define PORT 8084
#define BUFFER_SIZE 4096
#define MAXN 20
int main() {
  int server_fd, client_fd;
  struct sockaddr_in server_addr, client_addr;
  socklen_t client_len = sizeof(client_addr);
  char buffer[BUFFER_SIZE] = {0};
  char result[BUFFER_SIZE] = {0};
  int mat[MAXN][MAXN];
  server_fd = socket(AF_INET, SOCK_STREAM, 0);
```

```
int opt = 1;
setsockopt(server_fd, SOL_SOCKET, SO_REUSEADDR, &opt, sizeof(opt));
server_addr.sin_family = AF_INET;
server_addr.sin_addr.s_addr = INADDR_ANY;
server_addr.sin_port = htons(PORT);
bind(server_fd, (struct sockaddr *)&server_addr, sizeof(server_addr));
listen(server_fd, 3);
printf("Server listening on port %d...\n", PORT);
client_fd = accept(server_fd, (struct sockaddr *)&client_addr, &client_len);
printf("Client connected: %s:%d\n",
     inet_ntoa(client_addr.sin_addr), ntohs(client_addr.sin_port));
int n = recv(client_fd, buffer, BUFFER_SIZE - 1, 0);
buffer[n] = '\0';
printf("Received from client: %s\n", buffer);
char *token = strtok(buffer, " ");
int N = atoi(token);
for (int i = 0; i < N; i++) {
   for (int j = 0; j < N; j++) {
      token = strtok(NULL, " ");
      mat[i][j] = atoi(token);
   }
}
int isDiagonal = 1, isUpper = 1, isLower = 1;
for (int i = 0; i < N; i++) {
   for (int j = 0; j < N; j++) {
      if (i != j && mat[i][j] != 0) isDiagonal = 0;
      if (i > j && mat[i][j] != 0) isUpper = 0;
      if (i < j && mat[i][j] != 0) isLower = 0;
```

```
        }
    }
    char type[32];
    if (isDiagonal)
        strcpy(type, "Diagonal Matrix");
    else if (isUpper)
        strcpy(type, "Upper Triangular Matrix");
    else if (isLower)
        strcpy(type, "Lower Triangular Matrix");
    else
        strcpy(type, "General Matrix");
    int sum = 0, trace = 0;
    for (int i = 0; i < N; i++) {
        for (int j = 0; j < N; j++) {
            sum += mat[i][j];
        }
        trace += mat[i][i];
    }
    snprintf(result, BUFFER_SIZE,
             "Matrix Type = %s\nSum of Elements = %d\nTrace = %d",
             type, sum, trace);
    send(client_fd, result, strlen(result), 0);
    printf("Sent results to client:\n%s\n", result);
    close(client_fd);
    close(server_fd);
    return 0;
}
```

OUTPUT

```
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ gcc tcpserver.c -o s
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ ./s
Server listening on port 8084...
Client connected: 127.0.0.1:52516
Received from client: 3 1 2 3 0 4 5 0 0 6
Sent results to client:
Matrix Type = Upper Triangular Matrix
Sum of Elements = 21
Trace = 11
```

```
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ gcc tcpclient.c -o c
abu@Abu:/mnt/c/Users/muham/Onedrive/Desktop/C$ ./c
Connected to server 127.0.0.1:8084
Enter order of square matrix (N): 3
Enter 3 x 3 matrix elements:
1 2 3 0 4 5 0 0 6
Sent to server: 3 1 2 3 0 4 5 0 0 6
Results received from server:
Matrix Type = Upper Triangular Matrix
Sum of Elements = 21
Trace = 11
```

Conclusion

The matrix analyzer server was successfully implemented and tested with a 3x3 upper triangular matrix. The server correctly identified the matrix type as "Upper Triangular Matrix", and computed Sum of Elements = 21 and Trace = 11, confirming correct matrix analysis over the socket connection.