


DS240-280


- Compact single-phase Type 2 surge protector
- I_n : 20 kA
- I_{max} : 40 kA
- Common mode
- Pluggable module
- Remote signaling option
- EN 61643-11, CEI 61643-11 compliance
- UL1449 ed.3

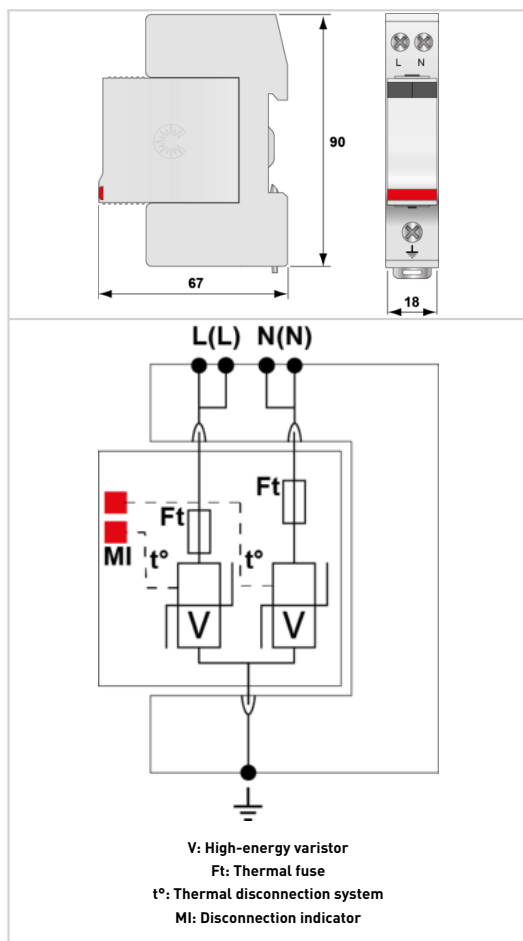

Electrical Characteristics		
SPD type (following IEC tests)		2
Network		230 V single-phase
AC system		TN
Max. AC operating voltage	U_c	280 Vac
Max. load current(if series connection)	I_L	20 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. (Without disconnection)	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn (Without disconnection or with safety disconnection)	UT	440 Vac disconnection
Residual Current(Leakage current to Ground)	I_{pe}	< 0.5 mA
Follow current	I_f	None
Nominal discharge current (15 x 8/20 μ s impulses)	I_n	20 kA
Max. discharge current(max. withstand @ 8/20 μ s by pole)	I_{max}	40 kA
Total Maximum discharge current (max. total withstand @ 8/20 μ s)	I_{max} Total	80 kA
Connection mode(s)		L/PE and N/PE
Protection mode(s)		Common mode
Residual voltage at 5 kA(@ 5 kA (8/20 μ s))	U_{p-5kA}	0.9 kV
Protection level CM/DM(@ In (8/20 μ s))	$U_{p\ mc/md}$	1.3 kV
Admissible short-circuit current	I_{scrr}	10 000 A
Mechanical Characteristics		
Technology		MOV
SPD configuration		Single phase
Connection to Network		by screw terminals: 1.5-10mm ² [L/N] or 2.5-25mm ² [PE]
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm [DIN 60715]
Housing material		Thermoplastic UL94 V-0
Operating temperature	T_u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection
Disconnection indicator		2 mechanical indicators
Spare module(s)		DSM240-280
Remote signaling of disconnection		Option DS240S-280 : output on changeover contact
Dimensions		See diagram
Weight		0.125 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Fuses		50 A mini. - 125 A max. - Fuses Type gG
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 4ed.
Certification		UL / EAC / TUV
Part number		
311101		

Certificat UE de Conformité

EU Declaration of Conformity

CE

Société/Company : CITEL

Adresse/ Address : 2, rue Troyon 92310, Sèvres, France

Marque/ Trade Mark : CITEL

Gamme de produits : **Parafoudres pour réseau d'alimentation DC**

Product Range : **Surge Protective Devices (SPD) for DC power network**

Références/Models	Utilisation / Application
DS210-12DC	Type 2 + 3 SPD for 12 Vdc power network
DS210-24DC	Type 2 + 3 SPD for 24 Vdc power network
DS210-48DC	Type 2 + 3 SPD for 48 Vdc power network
DS210-75DC	Type 2 + 3 SPD for 75 Vdc power network
DS210-95DC	Type 2 + 3 SPD for 95 Vdc power network
DS210-110DC	Type 2 + 3 SPD for 110 Vdc power network
DS210-130DC	Type 2 + 3 SPD for 130 Vdc power network
DS210-48DC/SCL	Type 2 + 3 SPD for 48 Vdc power network
DS210-75DC/SCL	Type 2 + 3 SPD for 75 Vdc power network
DS220-12DC	Type 2 SPD for 12 Vdc power network
DS220S-12DC	Type 2 SPD for 12 Vdc power network (with remote signal)
DS220-24DC	Type 2 SPD for 24 Vdc power network
DS220S-24DC	Type 2 SPD for 24 Vdc power network (with remote signal)
DS230-48DC	Type 2 SPD for 48 Vdc power network
DS230S-48DC	Type 2 SPD for 48 Vdc power network (with remote signal)
DS210-12DC	Type 2 + 3 SPD for 12 Vdc power network
DS210-24DC	Type 2 + 3 SPD for 24 Vdc power network
DS210-48DC	Type 2 + 3 SPD for 48 Vdc power network
DS210-75DC	Type 2 + 3 SPD for 75 Vdc power network

DS240-75DC	Type 2 SPD for 75 Vdc power network
DS240-75DC	Type 2 SPD for 75 Vdc power network (with remote signal)
DS240-95DC	Type 2 SPD for 95 Vdc power network
DS240S-95DC	Type 2 SPD for 95 Vdc power network (with remote signal)
DS240-110DC	Type 2 SPD for 110 Vdc power network
DS240S-110DC	Type 2 SPD for 110 Vdc power network (with remote signal)
DS240-130DC	Type 2 SPD for 130 Vdc power network
DS240S-130DC	Type 2 SPD for 130 Vdc power network (with remote signal)
DS240-220DC	Type 2 SPD for 220 Vdc power network
DS240S-220DC	Type 2 SPD for 220 Vdc power network (with remote signal)
DS240-280DC	Type 2 SPD for 280 Vdc power network
DS240S-280DC	Type 2 SPD for 280 Vdc power network (with remote signal)
DS240-350DC	Type 2 SPD for 350 Vdc power network
DS240S-350DC	Type 2 SPD for 350 Vdc power network (with remote signal)

Cette déclaration de conformité est établie sous la seule responsabilité du fabricant.

Basé sur l'évaluation volontaire d'échantillons de produits et sur les dossiers techniques correspondants, nous certifions que les produits listés ci-dessus satisfont aux dispositions de la **Directive Basse Tension 2014/35/EU** du Conseil de l'Union Européenne et sont conformes aux normes suivantes :

This declaration of conformity is issued under the sole responsibility of the manufacturer.

Based on voluntary assessment of the product samples and technical file, We certify that the listed products, as mentioned above, comply with the provisions of the **Low Voltage Directive 2014/35/EU** of the Council of the European Union and are conformed by compliance with following European standards:

<i>European standard</i>	<i>Description</i>
EN 61643-11:2012 + EN 61643-11:2012/A11 : 2018	Low-voltage surge protective devices – Part 11: Surge protective devices connected to power systems – Requirements and test methods.

Sèvres,
18/02/2018



Christian Macanda
Product Manager

CITEL 2 CP S.A.S.
Capital 5 013 500 €
2 rue Troyon
92316 SEVRES CEDEX
Tél. : 01 41 23 50 23
Fax : 01 41 23 50 09
Siren 387 740 095 - APE 2712Z