



Head Office - Excel Earthings
7/729 (A), Mannuthy P.O.
Thrissur Dt., Kerala – 680 651
Ph. No.:- +91 - 9497804983

FACTORY – Excel Earthings
Plot No:26,30 & 34, SIDCO Industrial Park
Chelakkara, Thrissur Dt., Kerala – 680 587
Ph. No. :- +91 – 9446 724 551

EARTH PIT CHAMBER


Product Description

- **EXCEL EARTHINGS** Earth Pit Chambers are made of UV resistant PVC moulding grade with high rigidity and high impact strength.
- Earth Pit Chamber is an external covering used to provide protection for all Earthing terminations against direct contact of any kind.



PRODUCT DETAILS **SINCE 2006**

Specifications	Details
Complied To	IEC 62561-5:2017
Tested To	Compression Test from CIPET Kochi
Item Code	EPC 18 x 18
Material	PVC
Lid Colour	Green or Red
Top Dimension	180 mm x 180 mm
Bottom Dimension	240 mm x 240 mm
Height	210 mm

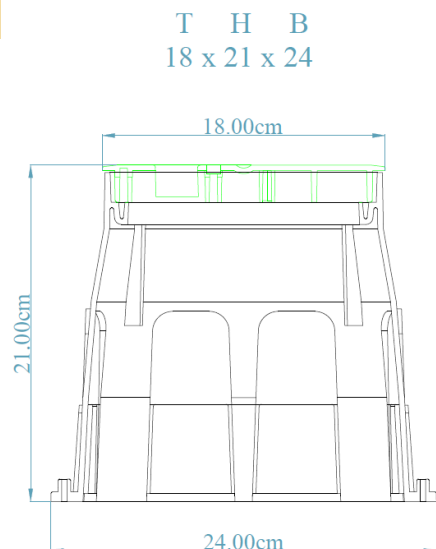

Safest Platform for Electrical Earthing

E-mail – mail@excelearthings.com, Website – www.excelearthings.com



Head Office - Excel Earthings
7/729 (A), Mannuthy P.O.
Thrissur Dt., Kerala – 680 651
Ph. No.:- +91 - 9497804983

FACTORY – Excel Earthings
Plot No:26,30 & 34, SIDCO Industrial Park
Chelakkara, Thrissur Dt., Kerala – 680 587
Ph. No. :- +91 – 9446 724 551

EXCEL EARTHING COMPOUND



The effectiveness of Earthing can be improved by increasing the earth's conductivity by enhancing its moisture absorption property and by enriching the charge carrying ions.

Earthing Compound has a good conductivity, moisture absorption and retaining capacity for longer period and continuous resistance against corrosion which are the characteristics of the mineral composition of our Earthing compound providing a superior quality solution to any toughest grounding problems. In areas of poor conductivity, EXCEL EARTHINGS compound will be a perfect choice.

The Maintenance free Earthing Compound is third party Tested and Certified for IEC 62561-7:2018, 2011/65/EU (RoHS-2), Eco-Friendly Certification and TCLP (Toxicity Characteristic Leachable Procedure).

Available in 10kg, 25kg and 40kg

Safest Platform for Electrical Earthing

E-mail – mail@excelearthings.com, Website – www.excelearthings.com



Head Office - Excel Earthings

FACTORY – Excel Earthings

7/729 (A), Mannuthy P.O.
Thrissur Dt., Kerala – 680 651
Ph. No.:- +91 - 487 2970255

Plot No:26,30 & 34, SIDCO Industrial Park
Chelakkara, Thrissur Dt., Kerala – 680 587
Ph. No. :- +91 – 9446 724 551

PRODUCT TECHNICAL DATA SHEET


TINNED NICKEL SEALED COPPER BONDED TERMINAL STRIPS

Product Description

- **EXCELRTHINGS Tinned** Stainless Steel Terminal Strips are manufactured in accordance with IS/IEC 62305-3:2010.
- Nylon Insulators are provided at the ends of the Terminal Strips.

Product Specifications

Specifications	Details
Material	Stainless Steel 304 Grade
Width	25mm
Thickness	4mm
Poles	4

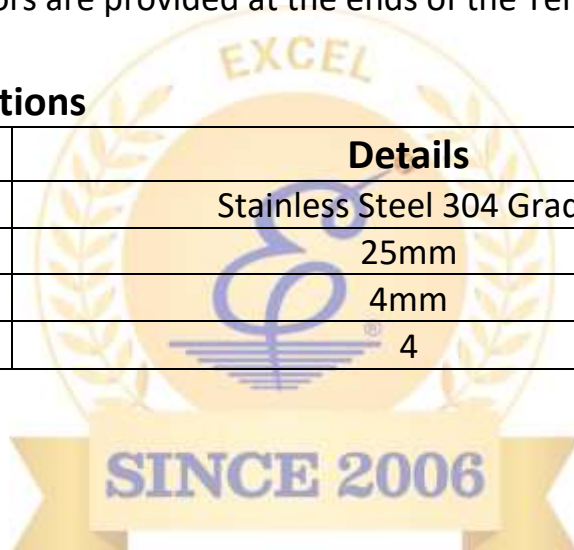

Note: Please Refer the Product Image. Actual Product is having 4 Holes and 4 sets of Stainless-Steel Nut bolts for interconnection.

Safest Platform for Electrical Earthing

E-mail – mail@excelearthings.com, Website – www.excelearthings.com



Head Office - Excel Earthings
7/729 (A), Mannuthy P.O.
Thrissur Dt., Kerala – 680 651
Ph. No.:- +91 - 487 2970255

FACTORY – Excel Earthings
Plot No:26,30 & 34, SIDCO Industrial Park
Chelakkara, Thrissur Dt., Kerala – 680 587
Ph. No. :- +91 – 9446 724 551

PRODUCT TECHNICAL DATA SHEET

NICKEL SEALED COPPER BONDED EARTHING ROD WITH PRESSED TERMINALS

Product Description

- **EXCEL EARTHING** Copper Bonded Earthing Rod 100 Microns with Pressed Terminals are manufactured in accordance with latest International, National Standards and Regulations.
- A layer of Nickel coating is provided in between copper and mild steel to get good adherence.

Product Specifications

Specifications	Details
Complied To	IS 3043:2018, NBC 2016, IEC 60364-5-54:2011, IS 1772:1973
Base Material	Mild Steel
Coating Material	99.9% Pure Electrolytic Copper
Coating Thickness	100 microns (Avg.)
Diameter	14mm
Length	1.2m

Note:

- Pressing is provided on the terminals for better contact with the earth connections.
- Coating thickness is provided to withstand Corrosion effects and mechanical damage of copper coating during the installation process.

Safest Platform for Electrical Earthing

E-mail – mail@excelearthings.com, Website – www.excelearthings.com




Head Office - Excel Earthings
 7/729 (A), Mannuthy P.O.
 Thrissur Dt., Kerala – 680 651
 Ph. No.:- +91 - 487 2970255

FACTORY – Excel Earthings
 Plot No:26,30 & 34, SIDCO Industrial Park
 Chelakkara, Thrissur Dt., Kerala – 680 587
 Ph. No. :- +91 – 9446 724 551

In-House Testing	
Bend Test 	There was no crack found in the coating when subjected to the Bend test as per relevant International and National standards
Adherence of Coating Test 	There was no separation of the coating from the steel core when subjected to the Adhesion test as per relevant International and National standards
Coating Thickness Test 	The thickness of the protective Copper coating will be determined by a reliable magnetic coating tester as per relevant International and National standards

PRODUCT DIAGRAM

Years of Excellence

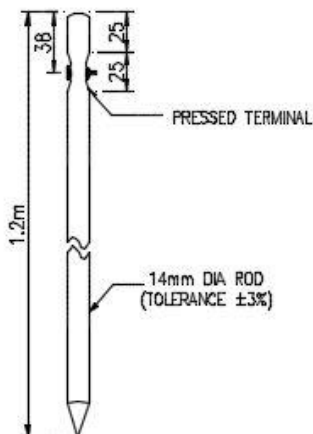

**NICKEL SEALED COPPER BONDED
 ROD 14mm DIA, 1.2Mtr LONG, 100Microns (AVG.)
 WITH PRESSED TERMINALS, SS NUT BOLTS**



**NICKEL SEALED 100 MICRONS COPPER BONDED
 RODS WITH PRESSED TERMINALS & SS NUT BOLTS**

Safest Platform for Electrical Earthing

E-mail – mail@excelearthings.com, Website – www.excelearthings.com