



PRIME COMPONENTS

"Connections for life"






Fuse Holder



Series : FH 6

DIMENSIONS

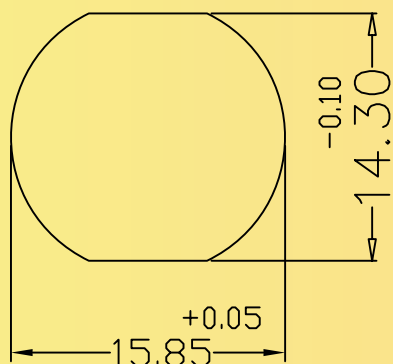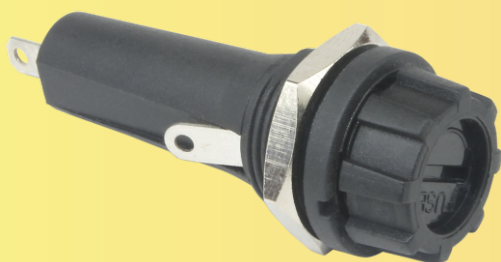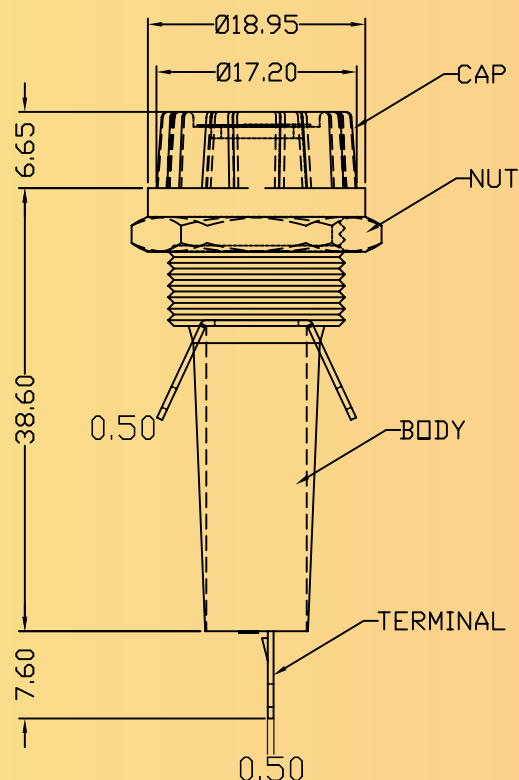

PANEL CUT OUT

Technical Specification

| | |
|------------------------------------|-------------------------|
| Mounting style | Panel, Screw Up |
| Permissible Temp.with/Without load | 0°C to +85°C |
| Permissible Temp. for Soldering | 270° for 5 seconds max. |
| Panel Thickness(Max.) | 3mm (Max) |
| Material: | Polyamide |
| Insulation Resistance | 1000 M Ohms min. |
| H.V. Break Down | 2KV/AC For 1 Minite |
| Current Carrying Parts | Brass,Tin Plated |
| contact Resistance(Initial) | 10 m Ohms max. |
| Cap Design | Screw-In With Coin Slot |
| App.Weight(gm) | 9.5 |
| Fuse Link Size | 6.3x32 mm |
| Rated Current/Voltage | 10 Amps/250V AC |
| Terminals | Solder type |

Series Also Includes...



EFH 1



FH 6S



FH 1



FH 1S



FH 7



FH R

Off / Works : 830, GIDC Estate, Makarpura, Vadodara - 390010



www.primecomponents.net



+91-265-6642566/6670078, +91 9687676700



sales@primecomponents.net