





PRIME COMPONENTS


"Connections for life"




PCB Terminal Block Series PBT W

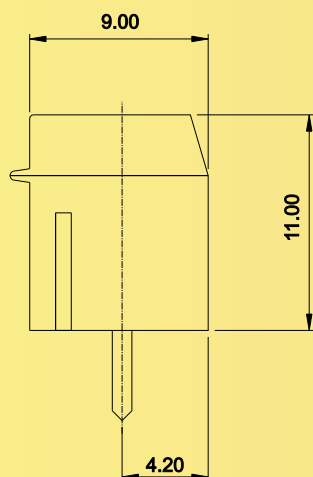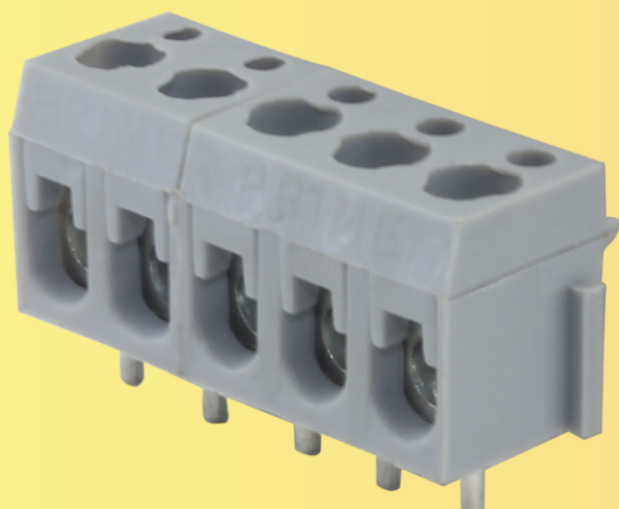

DIMENSIONS

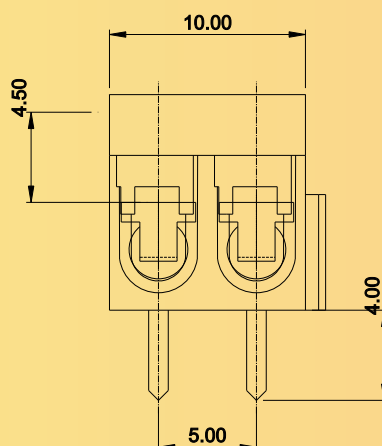


PBTW 2 WAY

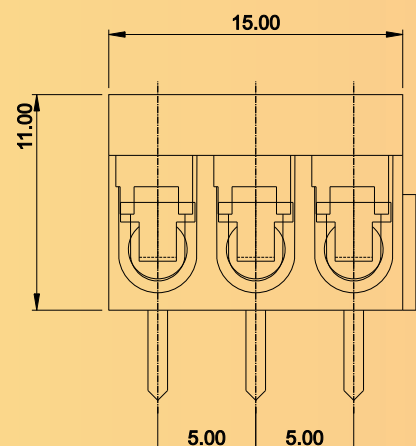

PBTW 3 WAY

PCB Layout



TECHNICAL SPECIFICATION


Current Rating	10A
Voltage Rating	250V
Insulation Resistance	> 1000M ohms at 500V DC
Dielectric Strength	>2 KV
Moulded Material	Engineering Thermoplastic
Terminal	Solid Brass alloy - Tinned
Pitch	5.00 mm
Screw	MS(Zinc Plated) / Brass Nickel Plated
Wire size	0.5-2.5 mm ²
Wire Protector	Copper alloy
Screw Size	M3
Max. torque for terminal Screws	0.4 Nm

Note : (1) Flame Retardent Grade Insulator Confirming to UL 94 V-0 available on Request.
(2) Recommended PCB hole 1.40 mm.

Series Also Includes...



500



501



126



350



381



762



527



ETK 50



PUT 2.5

Off / Works : 830, GIDC Estate, Makarpura, Vadodara - 390010



www.primecomponents.net



+91-265-6642566/6670078, +91 9687676700



sales@primecomponents.net