




PRIME COMPONENTS


"Connections for life"



Power connector Series : TLPL

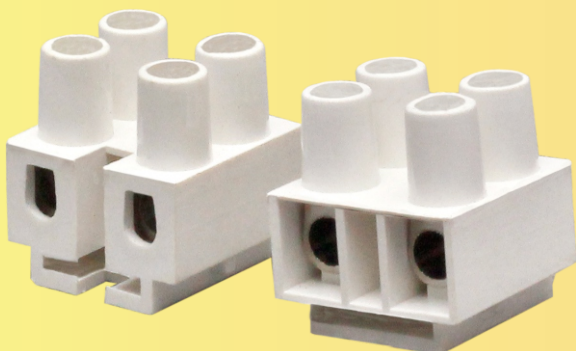

DIMENSIONS

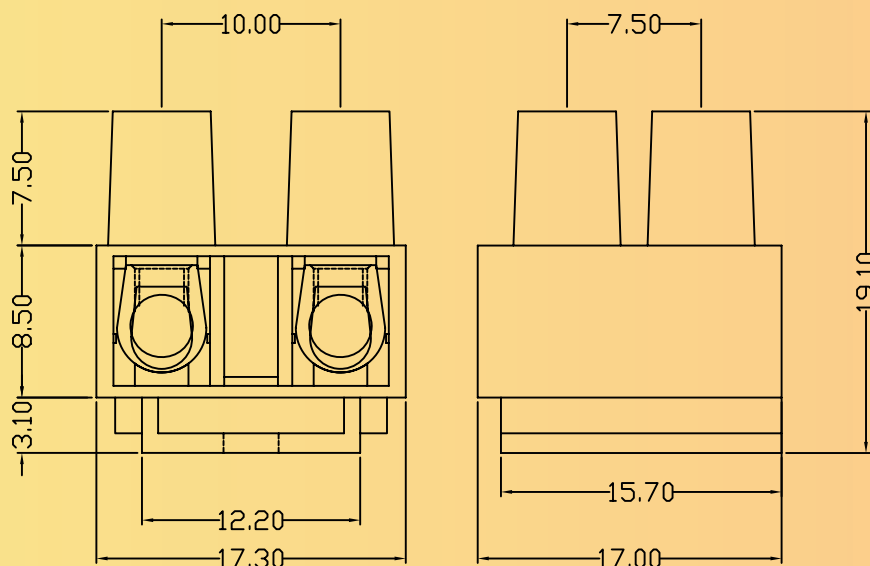

TECHNICAL SPECIFICATION

Current/Voltage Rating	20A / 300V AC
Test Class	IEC 60947 - 7 - 1
Recommended PCB Hole Dia.	1.30 mm
Dielectric Strength	>2 KV Min.
Moulded Material	Engineering Thermoplastic
Voltage Drop	20 m V
Pitch	7.50 X 10.00 mm
Screw	Screwless
Wire size	0.50 - 1.50 mm ²
Wire Protector	Copper alloy
Wire Strip Size	4.00 mm ²
Solder Pin Size	0.40 X 0.80 mm

Series Also Includes...



PFT 235



PFT 250 3.5



PFT 250 2.5



500



501



527



PRC 1



PUT 2.5



762

Off / Works : 830, GIDC Estate, Makarpura, Vadodara - 390010



www.primecomponents.net



+91-265-6642566/6670078, +91 9687676700



sales@primecomponents.net