




PRIME COMPONENTS



"Connections for life"



OUTLET SOCKET Series : PPS 6

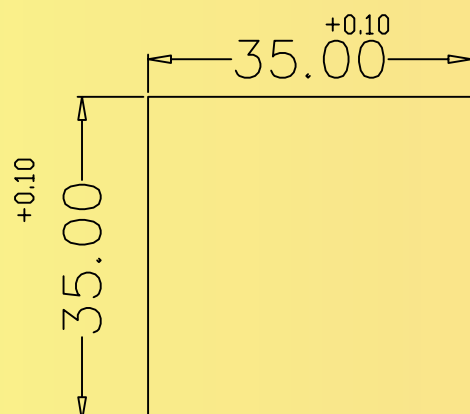

DIMENSIONS

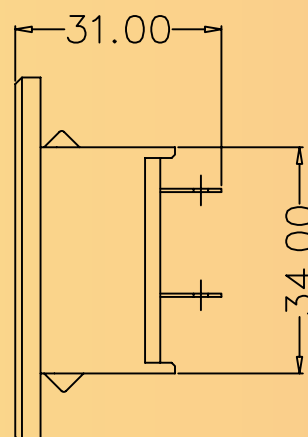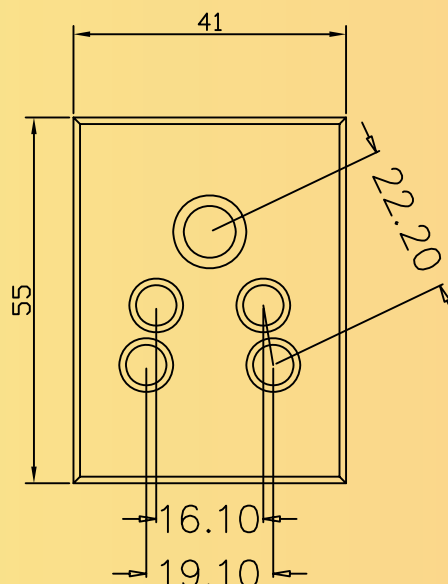

Series Also Includes...

TECHNICAL SPECIFICATION

Current/Voltage Rating	6A / 250V AC
Mounting Style	Panel, Snap-in
Permissible Temp. With/Without	0° C to 70° C
Permissible Temp. For Soldering	270° For 5 Second Max.
Panel Thickness(Max.)	0.80 to 2.0mm
Material	Polyamide
Insulation Resistance	1000 M Ohms Min.
H.V. Break Down	2KV/AC For 1 Min.
Current Carrying Part	Brass, Tin Plated
Contact Resistance(Initial)	20 M Ohms Max.
Terminals	4.7 X 0.50mm Solder Type
Solder Pin Size	0.40 X 0.80 mm



PPS 16



PMO 71



DC 022



PMI 20



PMO 21

Off / Works : 830, GIDC Estate, Makarpura, Vadodara - 390010



www.primecomponents.net



+91-265-6642566/6670078, +91 9687676700



sales@primecomponents.net