


Guidelines for driveway location & design.

ITE - Chapter 4

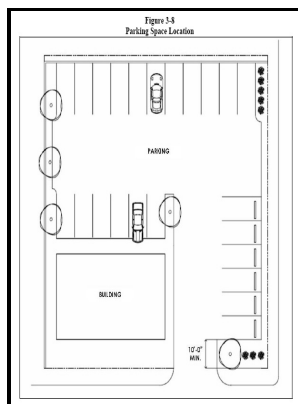

Description: -

-
Interpersonal relations -- Study and teaching (Secondary) -- British Columbia.
Life skills -- Study and teaching (Secondary) -- British Columbia.
Vocational guidance -- British Columbia.
Education, Secondary -- British Columbia.
Education -- British Columbia -- Aims and objectives.
Career education -- British Columbia.
DrivewaysGuidelines for driveway location & design.

-
ITE publication -- RP-006B

Recommended practice -- 006BGuidelines for driveway location & design.

Notes: Bibliography: p. 22-23.

This edition was published in 1987



Filesize: 4.710 MB

Tags: #2010 #ADA #Standards #for #Accessible #Design

Residential Driveway & Road Access on Side Roads Outside Municipalities

The Department has assembled this online version of the official 2010 Standards to increase its ease of use. At least one accessible route shall be provided within the play area. Both the order and pick-up section of the counter must be accessible.

67 Pa. Code § 441.7. General driveway requirements.

Where all seats in an assembly area are served by an induction loop assistive listening system, the minimum number of receivers required by Table 219. For the purposes of these requirements, assembly areas include, but are not limited to, classrooms, lecture halls, courtrooms, public meeting rooms, public hearing rooms, legislative chambers, motion picture houses, auditoria, theaters, playhouses, dinner theaters, concert halls, centers for the performing arts, amphitheaters, arenas, stadiums, grandstands, or convention centers. At least one companion seat complying with 802.

2010 ADA Standards for Accessible Design

EXCEPTION: The inmate or detainee side of cubicles or counters at non-contact visiting areas not serving holding cells or housing cells required to comply with 232 shall not be required to comply with 902 or 904.

Concrete Driveway Construction

The standard also addresses attendant operation.

67 Pa. Code § 441.7. General driveway requirements.

Where multiple single user toilet rooms are clustered at a single location, no more than 50 percent of the single user toilet rooms for each use at each cluster shall be required to comply with 603. These standards are referenced in the play areas requirements of this document when an accessible surface is required inside a play area use zone where a fall attenuating surface is also required. If existing or future volumes warrant installing a traffic sig- nal, and signalized spacing requirements cannot be met, left-turn access should be subject to closure in one or both directions.

Concrete Driveway Construction

Where two or more outlets are provided in a kitchen above a length of counter top that is uninterrupted by a sink or appliance, one outlet shall not be required to comply with 309. Where four or more public pay telephones are provided in a private building, at least one public TTY shall be provided in the building. Spaces frequented only by service personnel for maintenance, repair, or occasional monitoring of equipment shall not be required to comply with these requirements or to be on an accessible route.

Related Books

- [Investigation of the scattering of intermediate energy nucleons.](#)
- [Improve your learning](#)
- [N le maudit](#)
- [Existencia y la vida humana - un estudio sobre los fundamentos filosóficos de la antropología de Mig](#)
- [Filosofia mexicana - en sus hombres y en sus textos.](#)