

FALCON's Response to Delhivery for RFQ of Shipment Sorter_Bangalore

November 1, 2023





Kind Attention –

Mr. Sunny Raja

Mr. Himanshu Shekhar

M/s DELHIVERY Groupe

Offer Ref: F23-00455-02; Date 31.10.2023.

Subject – Techno -Commercial Offer of Shipment Sorter

We are pleased to submit our Techno-Commercial Offer to DELHIVERY in response to your **RFQ for Shipment Sorter, Bangalore**. We have taken this opportunity to also include adjustments discussed during our teams meeting on **15th Oct 2023**.

We would like to highlight the fact that Falcon Autotech, as a prime contractor for this project, is a global leader in providing intra-logistics automation solutions. Falcon has installed over **150 sorters worldwide** with capacity ranging from **800 to 60,000 PPH** and has an excellent track record in designing, manufacturing, and installing parcel sortation systems.

As you will note, we have studied your requirements in great depth and, along with the information collected during the workshops and calls with you, we have put together a detailed technical proposal laid out in various sections and sequenced to enable you to understand our proposed solution and to re-enforce our commitment to be your partner in this strategic initiative. From technical point of view, the system is **designed at 24000 PPH** and ensures simple operations and movement within the facility.


To conclude, I would like to add my personal commitment, on behalf of Falcon Autotech. As we move through the RFP process, please do not hesitate to contact me and my team. We will be pleased to assist you for any further information or clarifications that you might have.

Best Regards,

Sandeep Bansal

Chief Business Officer

Response to RFQ for Shipment Sorter_ Delhivery, Bangalore

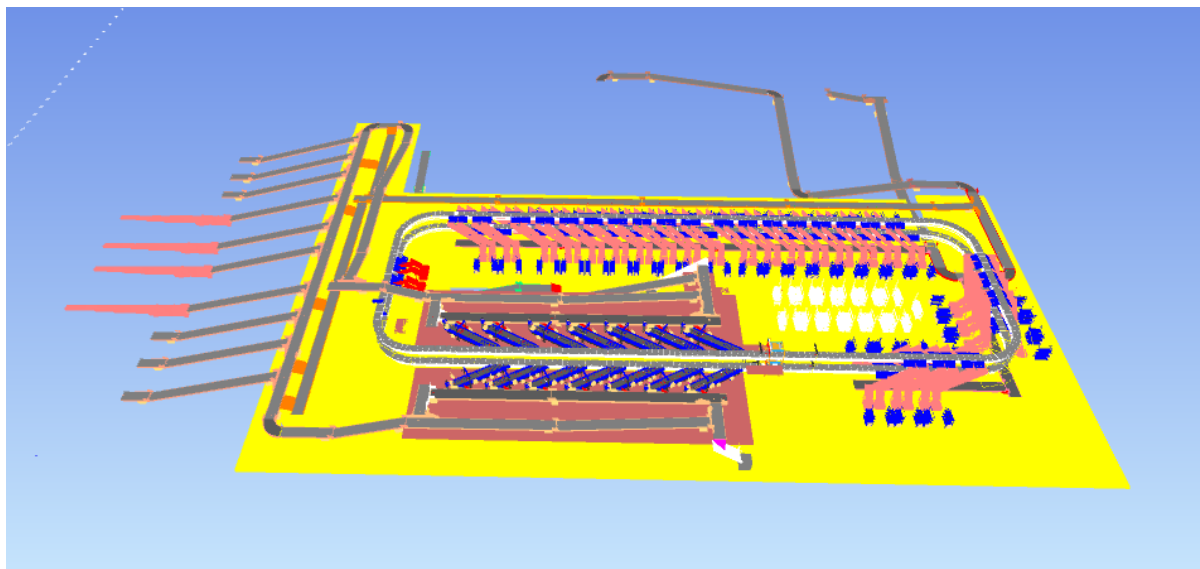

Proposal Reference – F23-00455-02

Falcon Autotech Private Limited
Plot No 308 & 309
Ecotech-1 Extension, Greater Noida
Uttar Pradesh- 201308India.

Contact – Adib Hasim
Manager – Sales & Solution
Mob - +91 9711619998
Adib.hasim@falconautoonline.com

Contents

Contents	4
1. Glossary	7
2. Executive Summary	8
3. Company Profile	9
4. Falcon's Experience and Achievements in Sortation Space Globally	13
5. Reference Projects	15
5.1 Project 1- (CEP Client, UK)	15
5.2 Project 2- (CEP Client, Riyadh)	16
5.3 Project 3- (Client – Courier Express Parcel, Dubai & Jeddah)	17
5.4 Project 4- (CEP Client, Sydney)	17
5.5 Project 5- (Client – E-Commerce, India)	18
5.6 Project 6- (Ecommerce Client, India)	19
6. Handled Parcel Spectrum	20
6.1 Parcel size loadable on the sorter	20
6.2 Parcels to be loaded on Sorter shall have the following characteristics:	20
6.3 Parcel not loadable on the sorter	21
6.4 Pictures of Sortable Parcels	22
7. Proposed System Description	23
7.1 Objective	23
7.2 Summary of the System	23
7.3 Main benefits of the proposed solution	24
8. Layout View	25
9. Proposed System Capacity Calculations	26
9.1 Sorter System Capacity	26
10. System description	26
10.1 Unloading Area	26
10.2 Infeed System	27
10.2.1 Telescopic Belt Conveyors	28
10.2.2 Infeed Conveyor System	29
10.2.2.1 Straight and Inclined Powered Belt Conveyor	29
10.2.2.2 Plastic Modular Belt Conveyor	31
10.2.2.3 Curve Conveyor	31
10.2.3 VDS System:	32
10.2.4 Conveyor BOQ	33
10.3 Feedlines	36

10.3.1.1	Orientation Conveyor.....	36
10.3.1.2	Weighing Conveyor.....	37
10.3.1.3	Buffer Conveyors.....	37
10.3.1.4	Intelligent Merge Conveyor	38
10.3.1.5	Irregular Chute	38
10.4	Irregular Takeout Conveyor	39
10.5	Main Loop.....	39
10.6	Sorting Output.....	40
10.6.1	PTL Chute	40
10.6.2	Rejection Chute	41
10.6.3	Collection Bin.....	42
11.1	Mechanical equipment	43
11.2	Electrical Equipment	44
11.3	Control System	44
12.	Description of Components of Equipment.....	45
12.1	Cross Belt Sorter -	45
12.2	CBS Carrier	45
12.2.1	Servo Roller.....	46
12.2.2	Chassis.....	46
12.2.3	Carrier Wheels	46
12.2.4	Friction Wheel Drive.....	47
12.2.5	Non-contact based linear motor drive	47
12.2.6	Power Transmission	47
12.2.7	Data Transmission	48
12.2.8	Carriers positioning System.	48
12.2.9	Technical specifications of Sorter	49
12.3	Scanning & Sensing on Main Sorter Loop.....	50
12.3.1	Automatic Barcode Scanning & Dimensioning System.....	50
12.3.2	Parcel Positioning System.	50
12.3.3	Empty Carrier Detection System.....	50
13.	Electrical System.....	51
13.1.1	Reference Picture of Power Distribution Panel	51
13.1.2	Main Control Panel (Reference).....	51
13.1.3	Induct Stations Control Panel (Reference).....	52
14.	Controls Architecture (Ref.)	53
15.	IT Architecture (Ref.).....	53



16.	Falcon's Visual Inspection System (SCADA)	54
16.1	FIELD DATA ACQUISITION	54
16.2	ANIMATED SYSTEM VISUALIZATION	55
16.3	ALARM MANAGEMENT	56
17.	Key Components Make	57
18.	Program Organisation	58
18.1	Program/ Project Schedule	58
18.2	Program Management	58
19.	DELHIVERY'S Responsibility	58
19.1	DELHIVERY Responsibilities During the Assembly and Commissioning Phase	58
19.2	Responsibilities of DELHIVERY During the Tests	59
19.3	DELHIVERY Responsibilities During the Training	59
20.	Warranty Period	60
21.	Commercial Terms	61
21.1	Price Sheet	61
21.2	Payment Terms	61
22.	Exclusions	62

1. Glossary

S. No.	Term	Description
1	RFQ	Request For Quote
2	PPH	Parcels Per Hour
3	ARB	Actuated Roller Balls
4	DBO	Damaged Barcode
5	VDS	Volume Distribution System
6	ICR	Intelligent Character Recognition
7	MEZZ	Mezzanine
8	LIM	Linear Induction Motors
9	ECDS	Empty Carrier Detection System
10	AC	Alternating Current
11	DC	Direct Current
12	PLC	Programmable Logic Controller
13	IT	Information Technology
14	BOQ	Bill Of Quantity
15	I/O	Input/ Output
16	PDP	Power Distribution Panel
17	PC	Personal Computer
18	UPS	Uninterrupted Power Supply
19	CBS	Cross Belt Sorter
20	DNF	Data Not Found
21	LGM	Logic Mismatch
22	RTVC	Real Time Video Coding

2. Executive Summary

Falcon is pleased to confirm its great interest in responding to this RFQ of Bag Sorter. Our team has been working closely with the relevant stakeholders, with a clear commitment to listening and understanding your needs and ensuring this project's success.

As prime contractor, Falcon ensures its full commitment to successfully completing this project. Following the same objective for the Bag Sorter system, we are happy to offer a compliant solution meeting all technical and operational requirements, high-performance, optimized, tailor-made, fast and secure planning, and a competitive price.

Our solution is based on the following key characteristics:

- **One loop of Bag sorter, based on a cross belt technology, offers a designed throughput of 24000 pph.**
- **Infeed conveyor system including 4 telescopic conveyors.**
- **96 PTL Chutes, , 4 rejection chutes, and 14 Irregular chute.**

A tailor-made and simple layout, specifically designed to Delhivery The proposed layout, is the result of the technical requirements in the RFP document and our discussions with the relevant stakeholders during our last Teams workshop meeting on June 8th.

- Simple operational conditions due to one single loop cross belt sorter.
- Easy maintenance: optimized number of conveyors and concentrated inducts area.
- Vehicle movement zones.
- Exceptions handling area with direct feeding via conveyor.

1. **Falcon's reliable and fully CE compliant Parcel sortation systems**

These systems are globally being used by most innovative brands such as Aramex, Amazon, Asendia, Fastway, Delhivery and many more. The main and critical components of the FALCON Autotech sorter building blocks, like wheels, motors, belts, bearings, Bus Bars, Communication platforms, PLCs etc., are sourced from some of the best suppliers in the world, such as SEW, Siemens, SICK, Faigle, Vahle and Forbo. This strategic baseline of sourcing policy allows Falcon's customers to be fully confident in the systems' robustness and reliability.

2. **Commitment to quality systems**

Demonstrating Falcon's clear commitment to the Delhivery Group's satisfaction, the parcel sortation system, parts and services will be under warranty for 12 months from the completion of installation & commissioning.

3. **Commitment to ensuring the quality of the delivery and its schedule.**

Falcon proposes a ramp-up approach, with a soft go-live by Mid of June 2025.

3. Company Profile

Falcon Autotech (Falcon) is a global intralogistics automation solutions company. With over 10 years of experience, Falcon has worked with some of the most innovative brands in E-Commerce, CEP, Fashion, Food/FMCG, Auto and Pharmaceutical Industries. With our proprietary software and robust hardware integration capabilities, Falcon designs, manufactures, supplies, implements, and maintains world-class warehouse automation systems globally. Falcon's strong research and development team and the continuous focus on innovation reflect our strong solution line around Sortation, Robotics, Conveying, Vision Systems and IOT. Falcon has done over 1,800 installations across 15 countries on four continents.

Falcon 2.0

Operational since in 2012, Falcon is a global intra-logistic automation solution provider handling parcels, bags, cartons and pieces

Falcon has five key solution lines: 3D Robotics, Sortation systems, Dimensions & Weight Systems, Put/pick To Light & Conveyors, along with rapidly scaling proprietary software called FACTS

Work with leading E-Commerce, CEP, Fashion, Food/FMCG, Auto and Pharmaceutical brands

5 Product Lines

15+ Countries with Live Installations

1800+ Total Installed Systems Globally

1Million+ Sorts Per Hour

600+ Employees

Long-standing Relationships with industry leaders

Ecom Retail

Flipkart

amazon

Lazada

noon

CEP

aramex

BLUE DART

DELHIVERY

Ecom Express

Distribution & Others

g

SWIGGY

TITAN

Minidisk Online Limited

News & Articles

FALCON AUTOTECH EXPANDS PRESENCE IN THE MIDDLE EAST WITH NEW OFFICE OPENING
Falcon Autotech is pleased to announce the opening of its new office in Dubai, UAE, marking a significant milestone in the company's expansion into the Middle East market.


FALCON AND ALSTEF GROUP ANNOUNCE GLOBAL TECHNOLOGY PARTNERSHIP
Falcon Autotech and Alstef Group Announce Global Technology Partnership for Parcel Sortation Solutions
Published - Sept 2022

Falcon Autotech is currently among the top 15 intralogistics automation company, our vision is to become top 10 intralogistics automation company in our focused product lines.

Our Vision

To be amongst the Top 10 global intra-logistics automation companies in our focused product lines

The team started out in 2004 solving special purpose automation problems for clients and later established Falcon Autotech in 2012 with strong focus on building standard technology stack spanning across Hardware, Firmware and Software to tackle bigger Supply Chain problems around warehouse automation and material handling. Over the decade, Falcon has made rapid strides and has carved out a niche in some of the world's most cutting-edge technologies: Sortation, Robotics, Conveying, Vision Systems and IOT.

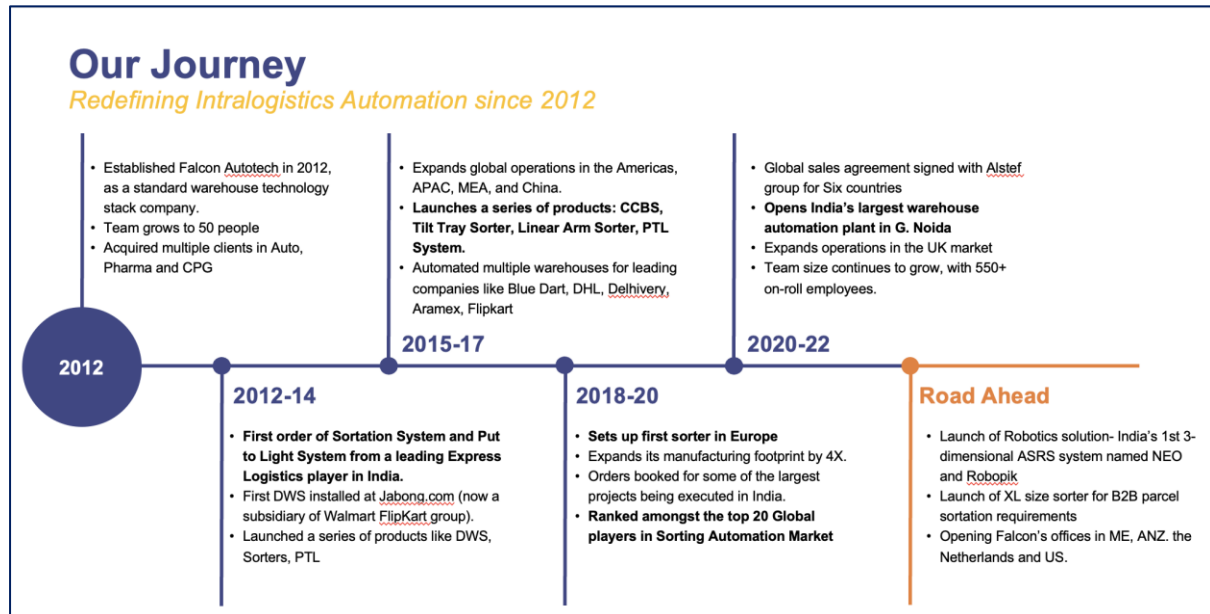

As a leading player in the intra-logistics automation space, Falcon continuously strives to improve the operational efficiencies and accuracies for its clients through its domain knowledge and experience in addition to its wide range of products and solutions. In order to be able to live up to the high expectations set forth by our clients, the team at Falcon realizes the importance of taking up selective applications in focused Industries and deliver world class projects in return.



Product and Solutions

With 100% focused on Parcels, Eaches, Totes, Bags, Cartons



SORTATION SOLUTIONS

- Cross Belt Sorter
- Linear Arm Sorter
- Swivel Divert Sorter
- Tilt Tray Sorter
- Pop-up Sorter
- Sweep Sorter
- Pusher Sorter



PICK/PUT TO LIGHT SYSTEMS

- PTL Module
- Racks
- Conveyors
- Hand Scanners
- Printers
- Peripheral Displays



DIMENSIONS & WEIGHT SCANNING SYSTEMS

- Cubizon Series
 - R, R-Eco, R-Thru, R-Cross
- Dynamic Profilers
 - Mini (600MM)
 - Jumbo (1200MM)



CONVEYOR SOLUTIONS

- Belt Conveyors
- Roller Conveyors
- Modular Conveyors
- Special Application Solutions



ROBOTICS

- NEO
- Robopick

Powered by

FACIS

SORT IT


Control IT

Falcon Autotech has successfully delivered warehouse automation solutions based on smart and innovative combinations of above product lines for effective materials handling, sortation and movement. The process is controlled in real-time by our in house WCS applications. These solutions considerably cut the need for manual operations, improve working conditions and ensure the highest accuracy of the entire process up to final delivery to the recipient.

Over the last 10 years, Falcon has worked with some of the most innovative brands worldwide and has established long standing partnerships. These brands are testimony of our strong focus on delivering superior customer satisfaction and offering end-to-end intralogistics solutions.

Select Key Clients

Some of world's most innovative brands trust us with their intra-logistics warehouse automation requirements

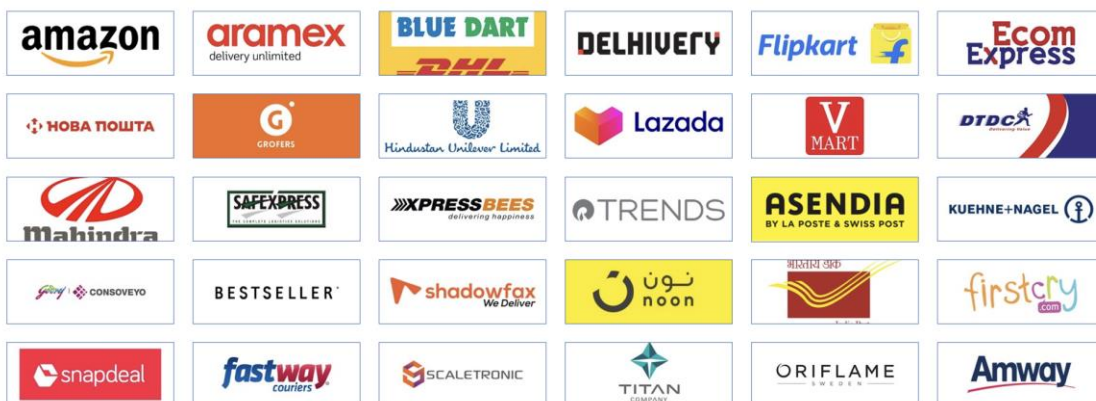


With over 1,800 installations, today Falcon's systems are used all over the globe. Falcon has highly motivated team of 600+ employees supported by over 15 global partners who help us design, manufacture, deliver and maintain automation solutions globally.



4. Falcon's Experience and Achievements in Sortation Space Globally

- Ranked among **Top 20 Sortation System Suppliers globally**. Only company from APAC/EMEA Region.
- Currently possess one of **the World's largest portfolios in Sortation Technologies**: 7 In-house technologies.
- Total installed capacity of **10 million Parcels per day** worldwide.
- Only company to be able to offer a **Fully Integrated AMS**.

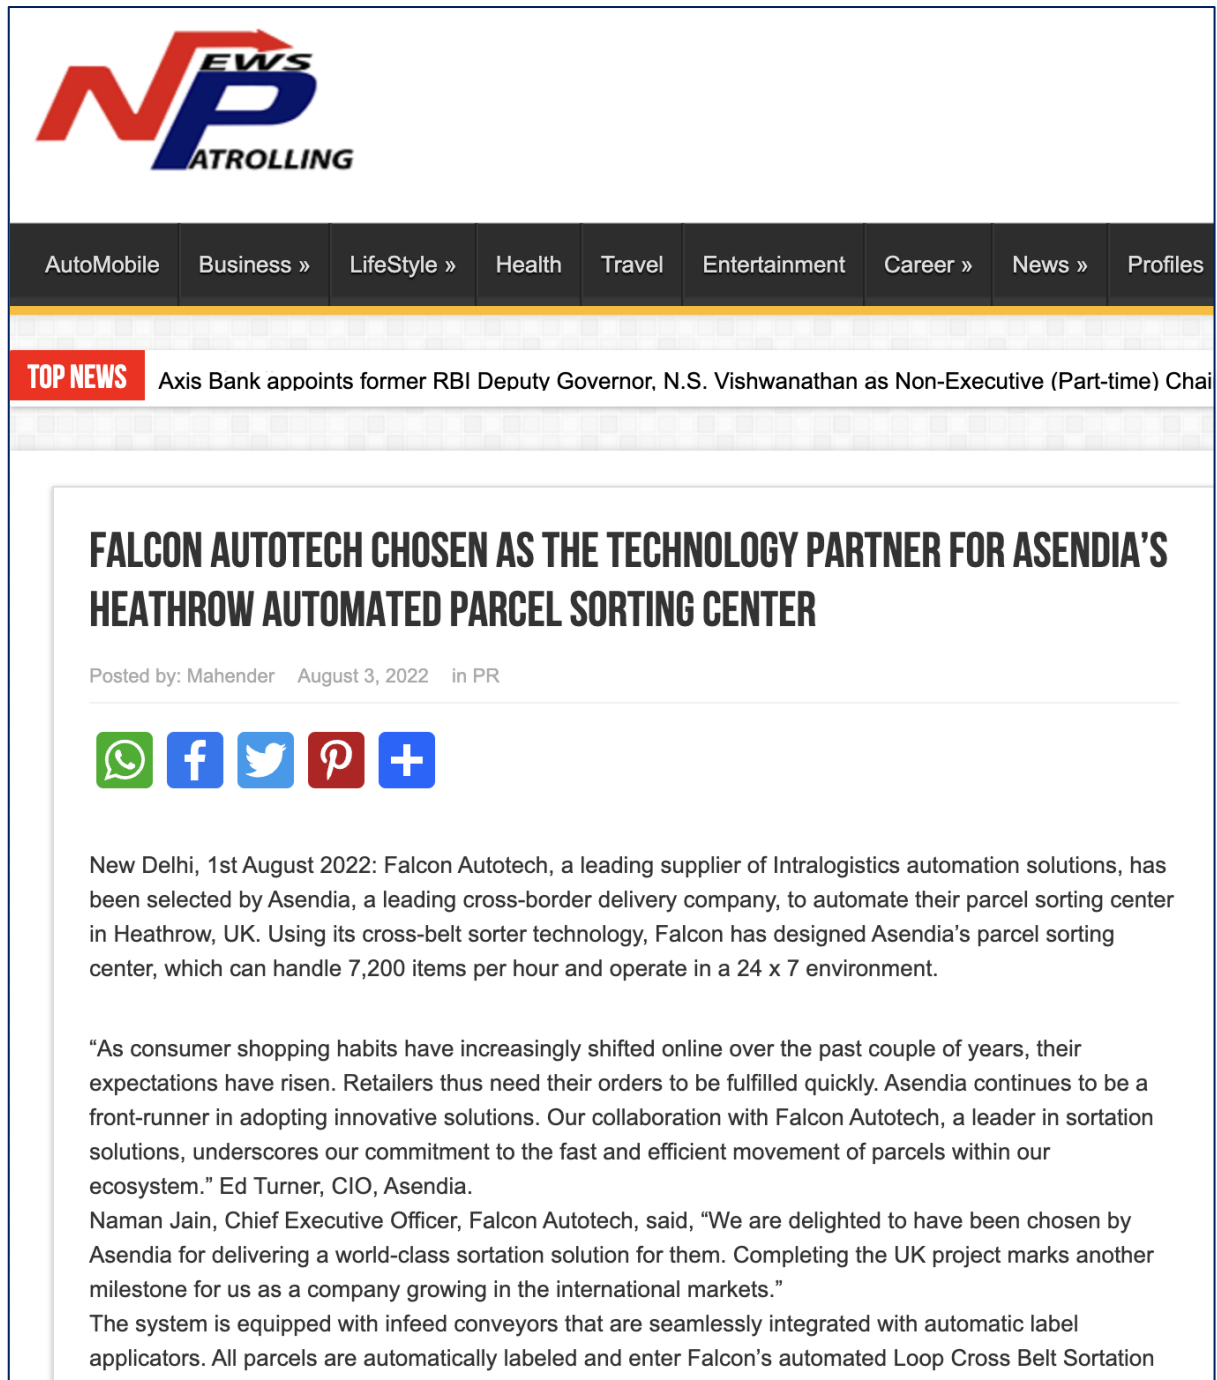

POSTED ON APRIL 17, 2023 IN / NEWS

Falcon Autotech Expands Presence in the Middle East with New Office Opening

Dubai, UAE – 17th April 2023 – Falcon Autotech (Falcon) is pleased to announce the opening of its new office in Dubai, UAE, marking a significant milestone in the company's expansion into the Middle East market. The new location will enable Falcon to better serve its existing customers in the region and expand its reach to new markets and prospects.

The decision to establish a presence in the Middle East was driven by the growing demand for Falcon's solution in the region, as well as the strategic importance of the Middle East as a hub for business and innovation. With a team of experienced professionals based in the region,

Falcon Autotech and Alstef Group Announce Global Technology Partnership for Parcel Sortation Solutions

Falcon Autotech, a leading supplier of Intralogistics automation solutions, and Alstef Group, an expert in comprehensive baggage handling solutions and parcel automation integration announce a strategic technology partnership for parcel sorting solutions. As part of an exclusive distribution agreement, Alstef Group will exclusively expand the deployment of Falcon Autotech's Cross-belt sorter range to specific geographies. Falcon Autotech's Cross Belt Sorter (CBS) range includes a linear CBS and a loop CBS option. With proven features, such as automatic item centering, flexible chute positioning, wireless data communication, real-time video coding, and variable electric discharge, the Falcon CBS range is one of the fastest and smoothest sortation systems available in the market.

5. Reference Projects

Falcon has a strong legacy in **Warehousing Automation** solutions and references-

1. Expertise in Parcel Sortation, Piece Picking and Handling, Case Picking and Handling.
2. Lifecycle services (maintenance, spares supply chain, support).
3. Full **in-house** expertise (Hardware/Software).
4. Turn-key **tailored** solutions.

The references list presented below focusing on Sortation Solution –

5.1 Project 1- (CEP Client, UK)

This Solution is designed to handle a volume of 7200 parcels per hour. The system is equipped with three infeed conveyors integrated with automatic label applicator before parcels enter the sortation system. The parcels are sorted using Falcon's Loop Cross Belt Sorter equipped with automatic barcode scanning, dimensioning, weighing and image capture capabilities. The sorter is installed on the mezzanine floor and sorts directly to 58 end destinations.

Solution Specifications –

- Throughput: 7200 PPH
- End Destinations: 58 Nos

Key Technology Modules –

- Powered Belt Conveyors.
- Automatic Induct Lines.
- Automatic Barcode Scanner with Image Capture.
- Automatic Weight & Volume Measurement System.
- Loop Cross Belt Sorter.
- WCS Software System.

Site Picture –



5.2 Project 2- (CEP Client, Riyadh)

In 2019, customer selected Falcon Autotech as a preferred supplier for its airport hub to supply linear cross belt sorter for processing of parcels arriving via Air from different states and countries to distribute them locally. The customer chose Falcon Autotech based on its strong track record of success in providing intralogistics automation solutions, optimized design, software integration capabilities and life cycle support services.

Solution Specifications –

- Throughput: 4800 PPH
- End Destinations: 52 Nos

Key Technology Modules –

- Powered Belt Conveyors.
- Automatic Induct Lines.
- Automatic Barcode Scanner with Image Capture.
- Automatic Weight & Volume Measurement System.
- ARB Conveyor.
- Automatic Label Applicators.
- Linear Cross Belt Sorter.
- Specialized Chutes for Gentle Parcel handling.
- FOCR Engine.
- WCS Software System.

Site Picture –



5.3 Project 3- (Client – Courier Express Parcel, Dubai & Jeddah)

This Solution is designed to handle the bulk volumes through Launchpads and induct them into Falcon's Linear Arm Sorter. This system is designed for a throughput of 3000 parcels per hour equipped with automatic barcode scanning, dimensioning, weighing and image capture capabilities to into a total of 480 end destinations with a combination of primary and secondary sortation system. The secondary sortation is achieved by integrating put to light system.

Solution Specifications –

- Throughput: 3000 PPH
- End Destinations: 480 Nos

Key Technology Modules –

- Powered Belt Conveyors.
- Linear arm sorter.
- Automatic Barcode Scanner.
- Automatic Weight & Volume Measurement System.
- WCS Software System.

Site Picture –



5.4 Project 4- (CEP Client, Sydney)

Solution is designed for handling a throughput of 16,000 parcels per hour with the help of Falcon's Loop Cross Belt Sorter. The system consists of 2 feeding zones with a total of 10 feedlines. Sorter design enables the van drivers to directly drop the parcels at the dock doors. It has a total of 369 end destinations that are achieved with a combination of direct drops and PTLs. System is integrated with 5 side automatic barcode scanning, weight and volume measurement and automatic detection of oversize and overweight parcels.


Solution Specifications –

- Throughput: 16000 PPH
- End Destinations: 369 Nos

Key Technology Modules –

- Powered Belt Conveyors.
- 2 Induct zone.
- 5 side Automatic Barcode Scanner.
- Automatic Weight & Volume Measurement System.
- Automatic detection of oversize parcel.
- Loop Cross Belt Sorter.
- WCS Software System.

Site Picture –

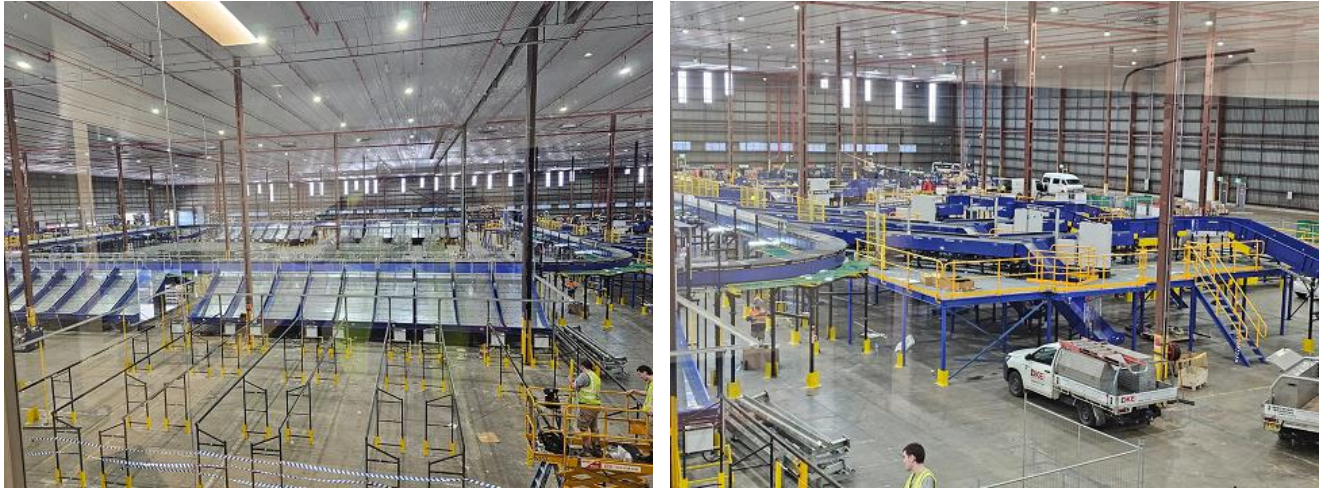

5.5 Project 5- (Client – E-Commerce, India)

Use Case – Destination Sorting of Packed Parcels.

In 2019, Client was looking for a potential automation partner for design and development of a new automated sortation system for B2C parcels. The system should be able to provide maximum uptime with reduced dependency on skilled manpower, and space optimization.

The customer chose Falcon Autotech based on its unique design which could cater to all their pain points, capability of seamless integration with WMS and life cycle support services.


Solution Specifications –

- Throughput: 27,600 PPH
- End Destinations: 410 Direct Outputs
- Building Size: 200,000 Sq Ft

Key Technology Modules –

- Bulk Infeed Conveyors.
- ARB based Volume Distribution System
- Integrated Presort System.
- Irregular Ejection System.
- Automatic Induct Lines.
- Automatic Barcode Scanner with Image Capture.

- Automatic Weight & Volume Measurement System.
- Loop Cross Belt Sorter.
- Smart Sliding Chutes for Direct bagging and Cage Sorting.
- Bag take out system
- WCS Software System.

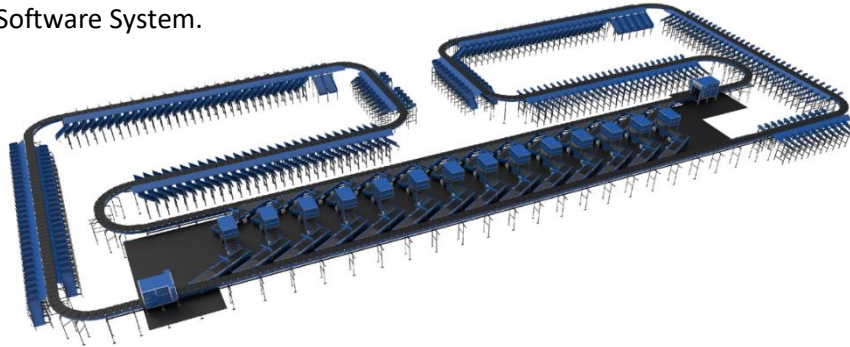

5.6 Project 6- (Ecommerce Client, India)


Use Case - Destination Sorting of Packed Shipments

Solution Specifications –

- Throughput: 24,000 PPH
- End Destinations: 110
- Building Size: 200,000 Sq. Ft

Key Technology Modules - Loop Cross Belt Sorter with a cell size of 900 x 500 mm

Layout and Site Pictures -

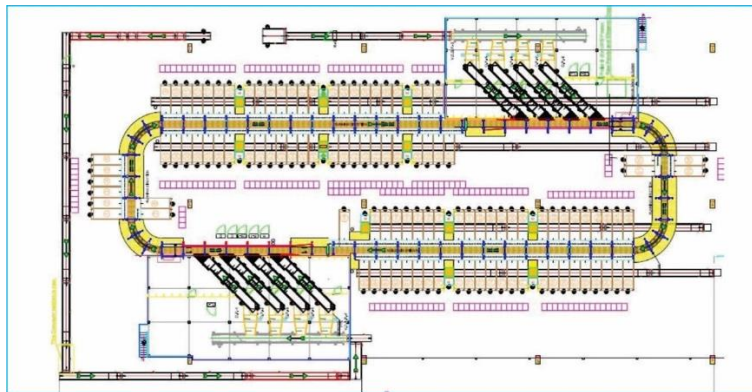

6. Handled Parcel Spectrum

As per the parcel spectrum data provided in the RFQ documents, Falcon has studied and analysed the parcel spectrum in detailed.

Falcon purposes to use its “Dual Belt Cross Belt Sorter” to provide the maximum benefits to DELHIVERY Group in-terms of handling large parcel sizes and weight.

6.1 Parcel size loadable on the sorter

Falcon's heavy duty cross belt sorter has a capability to handle the below mentioned parcel sizes and weight.

Specification	Unit	Value
Max Length	mm	500
Max Width	mm	500
Max Height	mm	500
Max Weight	Kg	10
Min length	mm	100
Min Width	mm	50
Min Height	mm	5
Min Weight	Kg	0.05
Dimension Accuracy	mm	+/- 10
Weighing Accuracy	Kg	+/- 60 grams or 0.05% of the Weight of Product (whichever is higher)

Note- Dimension will only be captured for parcels > 20 mm in height .

6.2 Parcels to be loaded on Sorter shall have the following characteristics:

1. Centre of Gravity of item must not move during conveyance or sorting.
2. Liquid or fragile material, to avoid breaking, spillage or leakage, such as wine bottles, metal cans of paint are designated as non- conveyable items.
3. Parcels shall be perfectly and safely packaged: protrusion or open surfaces are not allowed.
4. Plastic ropes shall be perfectly adherent to the surface of the package.
5. All items with the risk of being damaged during the transport on an automatic sorting system or damaging the sorting system. They must be robust enough to avoid disintegration of container material and loose of contents in the sorting process.
6. Item packaging shall have enough grip to be handled on the belts during the acceleration and referencing phases.
7. Items shall not have slippery surfaces and must be able to withstand acceleration of the items on the belt during the start-stop phases (accelerations up to 0.5 g shall be assured without any sliding or tumbling of the items on the belt conveyor).
8. The parcels must have at least one flat and regular surface providing enough stability during conveyance.
9. All shapes are permitted except spherical, cylindrical, or alike unstable items & shapes.











10. All usual packaging materials are permitted (including paper, carton, plastics, plastic foil, rope, tape, textile, and wood)

6.3 Parcel not loadable on the sorter

All products that are not within the range as described here, are considered non- conveyable products, and must be taken out of the main sorter flow by the operators.

1. Unstable items with a risk to roll or tumble on the sorting system, such as spherical or cylindrical items
2. Items that have a spherical or cylindrical shape.
3. Items that are packed in material that can damage the conveyors or the sorter.
4. Items that have sharp points (e.g. Nails) or sharp edges, that can damage the conveyors or the sorter.
5. Fragile parcels with contents not sufficiently secured
6. Items that have been classified as dangerous are designated.
7. Wet items are designated.
8. Items with anti-slip treatment.
9. Items with protruding parts.
10. Items with sharp edges.
11. Inadequately packed items that could be damaged during automatic transportation.
12. Electrostatically loaded items.
13. Loose parts on loads and load carriers, such as adhesive tape, stickers, slips of paper, straps, wrap foil etc. are designated as non- conveyable items.

6.4 Pictures of Sortable Parcels


PARCEL TYPE	DESCRIPTION
	Strongly Strapped A parcel banded with strapping material.
	Pre Manufactured Plastic Courier Pack <A3 in size A parcel shrouded in a plastic coating and is a manufactured product of a pre-determined size.
	Pre Manufactured Plastic Courier Pack > A3 in size A parcel shrouded in a plastic coating and is a manufactured product of a pre-determined size. Loose part with thickness under to minimum allowed (10 m) may create problems and are not recommended to be processed.
	Other Plastic Covered Item A cardboard parcel coated in a plastic material, for example bin liner, shrink-wrap and stretch-wrap.
	Paper Covered Item A cardboard parcel coated in a packing paper.
	Cloth Covered Item Often import parcels that are of irregular shape.
	Wine Box A robust, cardboard parcel that is designed to protect its fragile contents from breakage and has a high weight to size ratio.
	Cardboard Box A cardboard parcel is often the norm.
	Totes A large plastic, lidded box.
	Flats A parcel that often contains documents.
	Poly Bags It is a plasticized weave bag, used as a containerization solution, holding a number of other parcels within it.

7. Proposed System Description

7.1 Objective

The purpose of this proposal is to present the design, manufacturing, installation, commissioning, testing, and acceptance testing of the Double Deck Loop CBS for sorting shipments into destination as per specifications shared by DELHIVERY.

7.2 Summary of the System

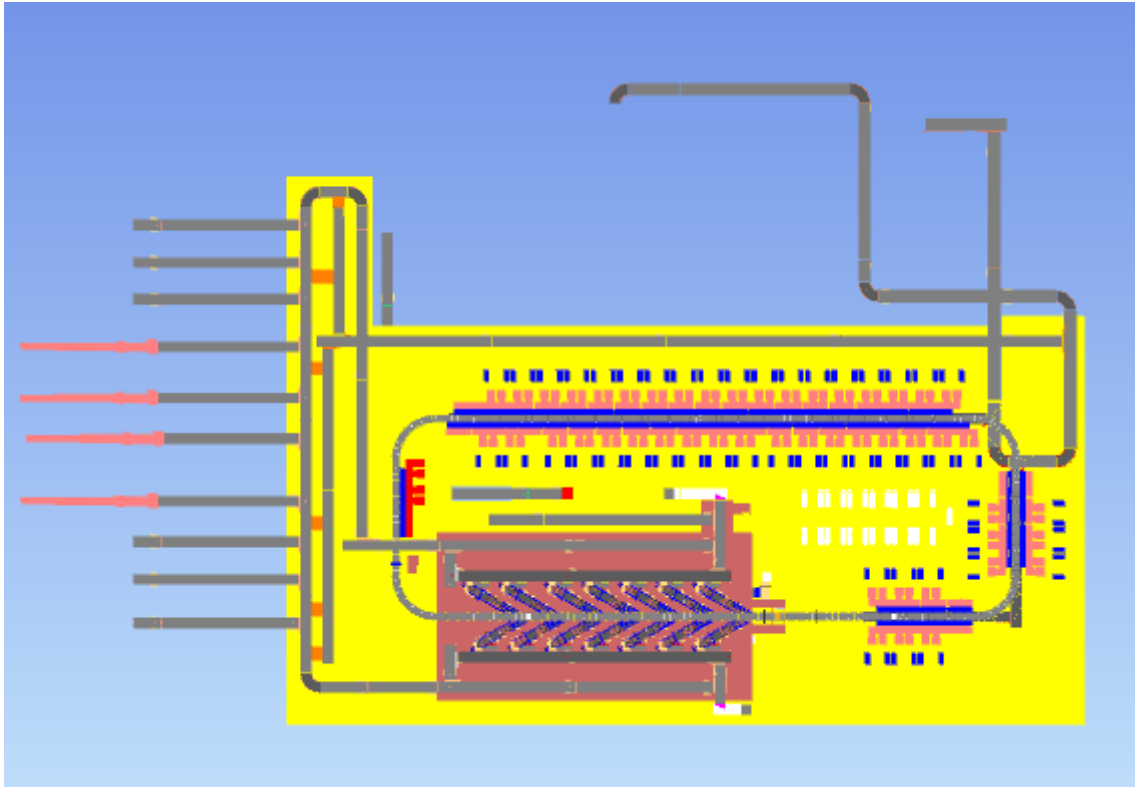

The complete parcel processing system includes, in accordance with the specifications provided by **DELHIVERY**:

Process Flow:

- Shipments will be unloaded from truck on the Telescopic Belt Conveyor or placed on straight PVC conveyor.
- TBC and straight PVC Conveyor will move the shipments to the respective infeed highway conveyors via inclined conveyors.
- In case of oversize parcel, operator will remove the parcels from the TBC and put this on Oversize Parcel Conveyors, which will transfer the big shipments directly to the VDS Loop of Bag Sorter


- Infeed Highway Conveyors will move the shipments to VDS Loop Conveyors
- Operator will collect the parcels from VDS Loop Conveyors.
- Operators orient and place the shipments on the Induct lines equipped with sensors.
- Feedlines induct the parcels on the Sorter automatically onto the Cross-Belt Sorter Loop which then sorts the parcels into respective chute using data from Flipkart's Sorting decision system. The Dimensions and image of the parcel is also captured on the Sorter.
- The sorted shipments are discharged into Direct Bagging Chutes and PTL Chutes.
- Secondary Sorting happens at PTL Chutes with help of Put to Light Racks and Bags are prepared. Associates scan the Shipments and drop them into the Bags guided by Light Modules on Racks.
- Take out Conveyors are planned near the chutes. Once the Bags are filled, they are dropped onto the Take-out Conveyors.
- Bag Takeout conveyors will transfer the bags to the VDS of Bag Sorter

7.3 Main benefits of the proposed solution

The proposed solution has the following advantages:

1. High operational throughput
2. Good Parcel conveying quality for the entire range of conveyable Parcels with a sorting conveyor speed up to 2 m/s.
3. Low occupancy of floor space in the building
4. Narrow discharge centers for increased number of splits in limited space
5. FALCON's CBS can adapt with changing business requirements by adjusting its speed. to match the operational throughput requirement, thereby leading to Power Savings and reduced system Wear & Tear.

8. Layout View

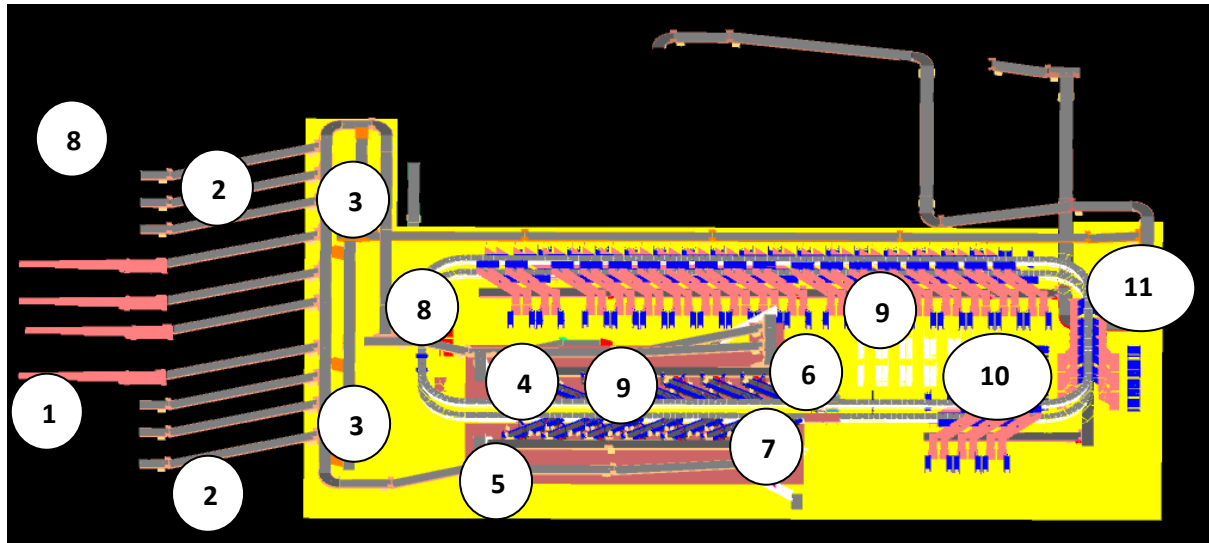

Legend

- 1 – Telescopic belt conveyor
- 2 – Infeed Inclined Conveyors
- 3 – Infeed Highway Conveyors
- 4 – VDS Loop Conveyor Upper Deck
- 5 – VDS Loop Conveyor Lower Deck
- 6 – Upper Deck Induct
- 7- Lower Deck Induct
- 8- Main Loop
- 9- PTL Chute
- 10- PTL Frames
- 11- Bag takeout Conveyor

9. Proposed System Capacity Calculations

9.1 Sorter System Capacity


The following table shows the throughput calculation for the sortation system designed based on DELHIVERY's RFP requirements.

SPECIFICATION	VALUE
Sorter Type	Loop CBS
Speed	2 m/s
Pitch	1,175 mm
Carrier per hour	6,127 CPH
Belts per hour	12,254 BPH
Sorter Designed Capacity	12254 PPH per deck
Feedline Capacity	2000 PPH

10. System description


10.1 Unloading Area

Shipments arriving in Bulk in trucks will be unloaded onto one of the telescopic conveyors present on the dock or the shipments will be placed on straight conveyors in front of Dock .

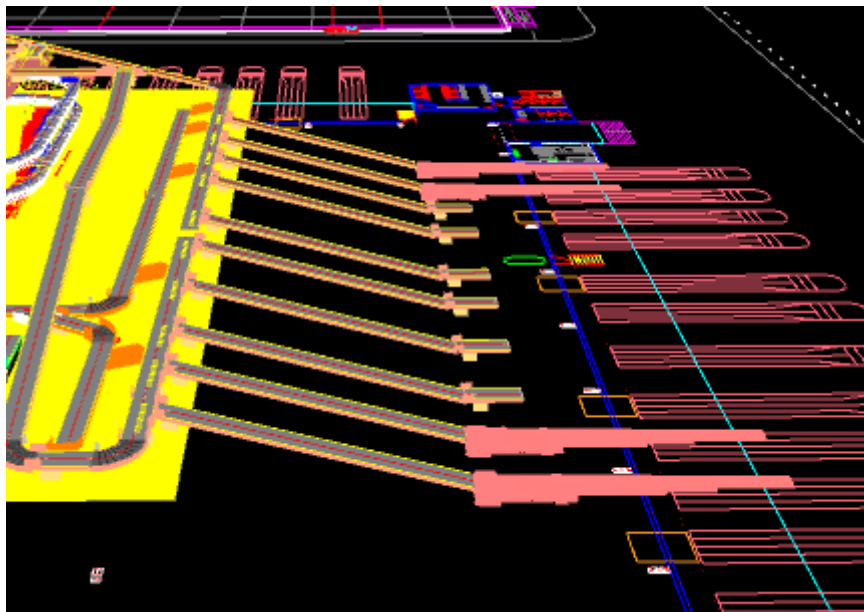

Truck Unloading Area

10.2 Infeed System

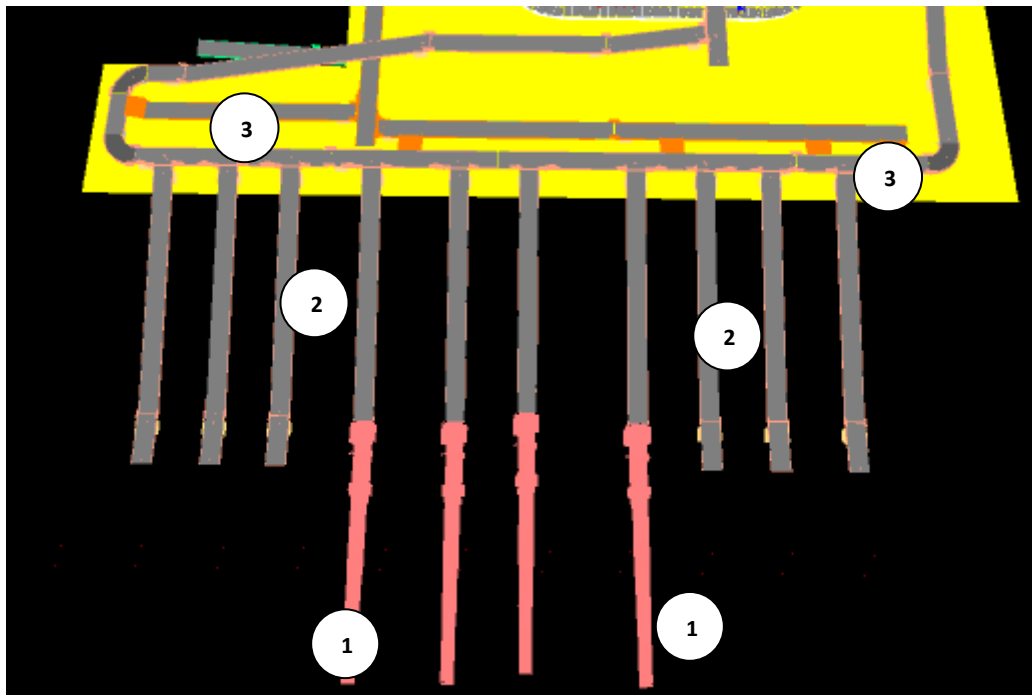

Legend

- 1- Telescopic Belt Conveyor
- 2- Infeed Inclined Conveyor system
- 3- Infeed Highway Conveyor

10.2.1 Telescopic Belt Conveyors

A telescopic belt conveyor, also known as an extendable conveyor or telescoping conveyor, is a type of conveyor system that features a telescoping mechanism to extend or retract the conveyor length as needed. It is commonly used in applications where flexible and adjustable conveying solutions are required, such as loading and unloading trucks or containers in warehouses, distribution centres, and shipping facilities.

In the proposed solution, Parcels from the Truck are transferred to infeed conveyors through Telescopic Belt Conveyors in singulated manner. TBCs are planned at a distance of 6 feet from dock leveller or 8 feet from the dock .



Specification	UOM	Remark
Manufacturer Name	Name	Falcon Autotech/Equivalent
Suitable Carton Size	MM	Min: 1000x800x800 Max: 100x100x5
Suitable Carton Weight	Kg	Min 0.05, Max 40
Base Length	Mm	5000
Extended Length (Total Length)	Mm	10000
Conveyor Belt Running Speed	m/min	18-30
Motor Rating	Type	0.75 Kw, 415V AC, 50 Hz
Load Capacity	Kg/m	40
Communication	Mm	2 x RS243, 1 x USB2.0, Ethernet

10.2.2 Infeed Conveyor System

Infeed conveyor system consists of below components:

1. Inclined PVC Conveyor
2. Straight PVC Conveyor
3. Modular Conveyor
4. Curve Conveyor
5. Buffer Conveyor
6. Merge Conveyor



10.2.2.1 Straight and Inclined Powered Belt Conveyor

Falcon's Belt Conveyors are modular & robust in design, used for smooth conveying of products over Straight, inclined and declined paths. MS profile is used to build conveyor frame.

The conveyors are supplied with the necessary supports and bolts to fix them to the supporting plane, as well as with the junction elements allowing easy and jam-free passage from one conveyor to the other.

Some Silent Features of Falcon's Belt conveyor:

- Low Noise
- Maximum uptime.
- Minimal maintenance
- High safety standards.
- Fastest ROI.

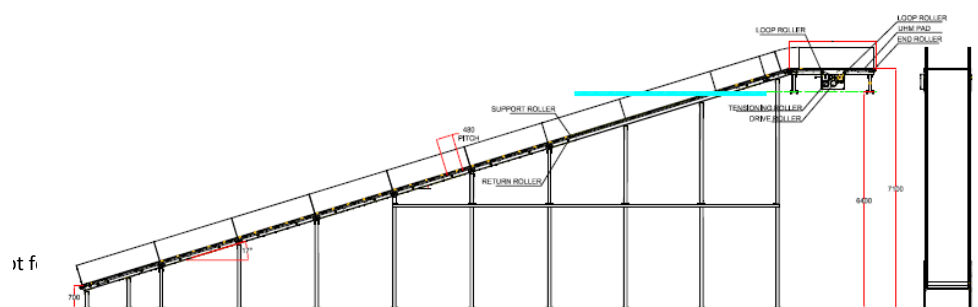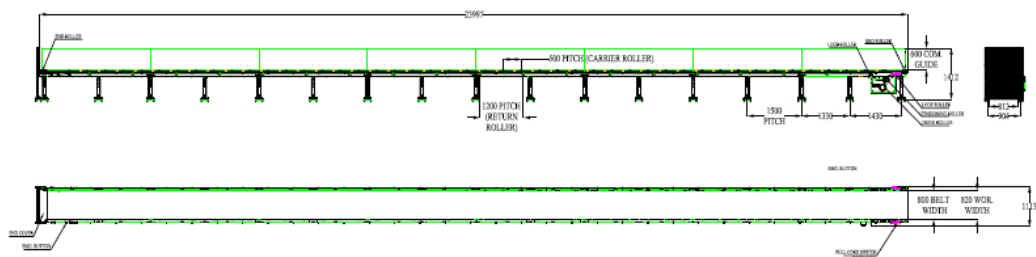


Specification	UOM	Remark
Manufacturer Name	Name	Falcon Autotech
Material of Roller	Type	MS Rollers with Zinc Plating
MOC of Belt	Type	PVC
Belt Thickness	mm	3
Belt Finish	Type	Matt Finish
Belt width	mm	1000/1200/1400
Belt Joint Type	Type	Vulcanized, Endless Belts
Belt Make/Model No.	Make	FORBO/DERCO
Chassis	mm	MS, 3mm Thick, Powder Coated-75 Microns
Idler Roller Pitch on running side (Top)	mm	480
Idler Roller Specs	Spec	Dia.50.8, shaft-12 mm, bearing-6301
End Rollers	Spec	Dia 81.2 x 2.85 Thick, 30mm Shaft Dia, & Bearing Size-UCFH206D1, MOC-EN9, Zinc Plated -25 microns
Drive Rollers	Spec	OUTER Dia 178 PIPE Dia 168x5 Thick, 40mm Shaft Dia, & Bearing Size-UCF208D1, MOC(SHAFT)-EN9, NEOPRENE RUBBER COATING
Motor Shaft	MOC	EN9 Shaft material
Conveyor Under guarding	Spec	MOC-MS, 0.8 to 1mm thickness, Steel Stiffeners at every 600mm to avoid the sagging due to self-weight
Load capacity per unit length of Conveyor	kg/m	50
Type of Guides	Type	Steel guides at 50mm/400mm height basis the position of conveyor on both sides from Conveyor Belt Surface.
Drive Power Rating	kW	Motor Rating depends on Length of the Conveyor
Type of Motor	Type	AC Geared Motor
Ingress Protection	Type	IP 55
Type of Drive System	Type	Direct Shaft Mounted Motor/ Flange Mounted
Type of Drive	Type	Chain drive/Torque Arm type
Gear Motor	make	Sew/Nord
Drive	make	Lenze/Siemens/Omron/Allen Bradly
Insulation Class	Type	Yes
Conveyor Speed	m/s	Variable speed to meet TPH requirements
Type of Mounts	Type	Fixed Heights Legs with Grouting Provisions

10.2.2.2 Plastic Modular Belt Conveyor

Falcon's Belt Conveyors are modular & robust in design. MS profile is used to build conveyor frame.

Some Salient Features of Falcon's Modular Belt conveyor:

- Low Noise
- Maximum uptime.
- Minimal maintenance
- High safety standards.
- Fastest ROI.

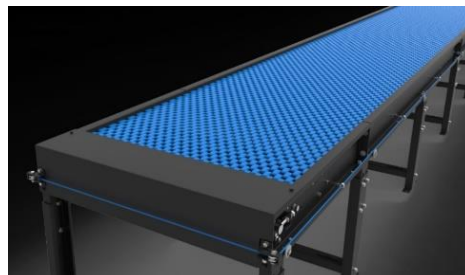


Specification	UOM	Remark
Manufacturer Name	Name	Falcon Autotech
Plastic Modular Belt Material	Type	POM with PBT Pins, Pitch-25.4 mm, Pin Dia- 5mm
Plastic modular Belt Make	Make	Movex
Sprocket Size & No. of Sprockets on Drive End & Tail End	Type	5/146.4 mm
Sprocket material	MOC	POM
Chassis	mm	MS, 3mm Thick, Powder Coated-75 Microns
Wear Strip Material	MOC	UHMW PE1000
Return Roller type	Type	DIA- 50 mm/20303
Return Roller Pitch	mm	800
Driven Shaft	Type	MOC-EN9 Solid Shaft hardened to BHN 240, Size-60SQ MM, Zinc Plated -25 microns, Bearings-UCF-210D1
Duplex Sprocket	MOC	MS

10.2.2.3 Curve Conveyor

Falcon's curve conveyors are robust and easily maintainable. The uniquely designed curve and belts provides smooth environment to parcels for making the turns. The metal frames of the belts are not deformable to prevent belt misalignment. The belt guide assembly will include removable parts to allow quick replacement in case of damage.



10.2.3 VDS System:

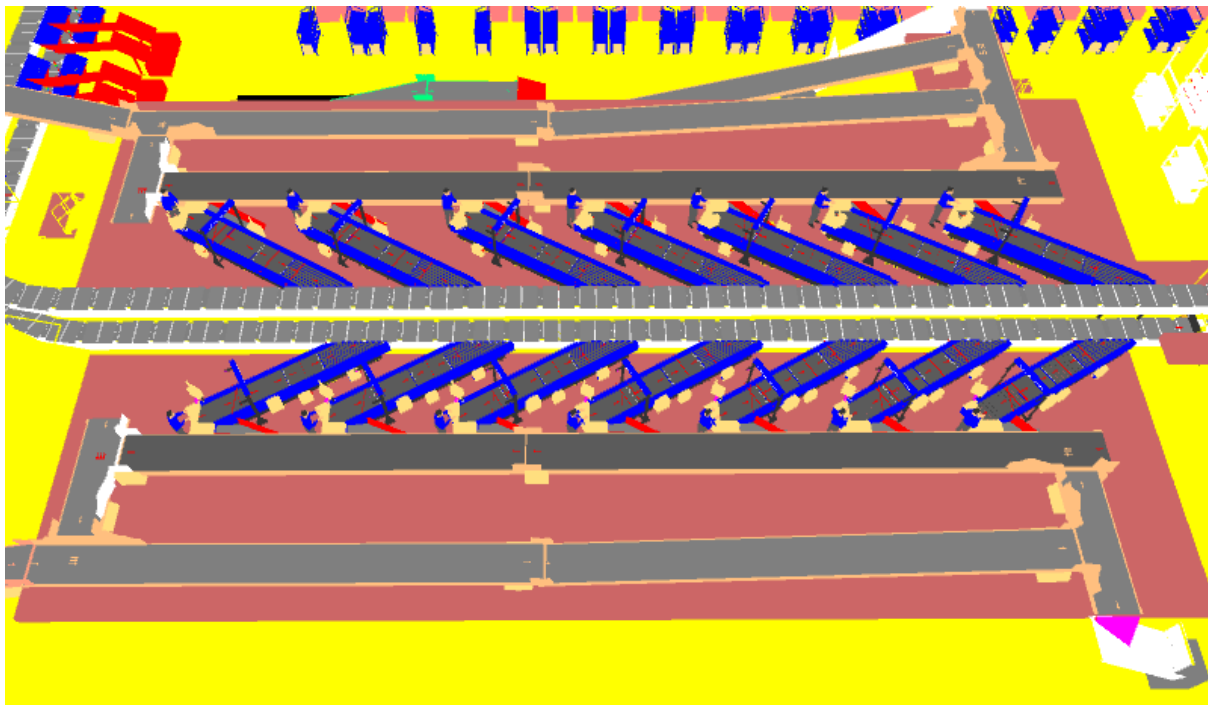

Bulk materials will enter in to the VDS Loop through Infeed Highway Conveyors. Operator will collect the parcels from VDS Loop and placed it on induct conveyor.

10.2.4 Conveyor BOQ

S No.	Name	Angle	EL_1	EL_2	Conveyor Length (m)	Conveyor Width(mm)	Qty
1	PVC Belt Conveyor 1	15.1	4583	9746	19.7	1210	1
2	PVC Belt Conveyor 2	0	4700	4700	11.0	1210	1
3	PVC Belt Conveyor 3	-0.3	4200	4300	19.9	1210	1
4	PVC Belt Conveyor 4	-0.3	4200	4300	16.6	1210	1
5	PVC Belt Conveyor 5	-0.4	4200	4300	14.2	1210	1
6	PVC Belt Conveyor 6	15.1	714	4948	16.1	1210	1
7	PVC Belt Conveyor 7	0	4250	4250	19.7	1210	1
8	PVC Belt Conveyor 8	0	4250	4250	14.4	1210	1
9	PVC Belt Conveyor 9	0	4250	4250	19.7	1210	1
10	PVC Belt Conveyor 10	3.5	4138	4464	5.3	1210	1
11	PVC Belt Conveyor 11	13.5	2059	5713	15.5	1410	1
12	PVC Belt Conveyor 12	0	4144	4144	4.3	1410	1
13	PVC Belt Conveyor 13	0	4250	4250	19.7	1210	1
14	PVC Belt Conveyor 14	7.9	4016	6685	19.3	1410	1
15	PVC Belt Conveyor 15	0	4599	4599	3.8	1210	1
16	PVC Belt Conveyor 16	-6.2	3422	2514	8.2	1210	1
17	PVC Belt Conveyor 17	0	5453	5453	3.4	1410	1
18	PVC Belt Conveyor 18	15	4599	9221	17.7	1210	1
19	PVC Belt Conveyor 19	0	10320	10320	6.2	1210	1
20	PVC Belt Conveyor 20	13.8	9038	10577	6.3	1210	1
21	PVC Belt Conveyor 21	0	9000	9000	3.8	1210	1
22	PVC Belt Conveyor 22	4.2	8639	9798	15.7	1210	1
23	PVC Belt Conveyor 23	0	7000	7000	3.8	1210	1
24	PVC Belt Conveyor 24	4.2	6639	7798	15.7	1210	1
25	PVC Belt Conveyor 25	0	4700	4700	5.3	1210	1
26	PVC Belt Conveyor 26	0	4700	4700	2.4	1210	1
27	PVC Belt Conveyor 27	15	862	4950	15.7	1210	1
28	PVC Belt Conveyor 28	14.4	861	4942	16.3	1210	1
29	PVC Belt Conveyor 29	0	815	815	3.0	1210	1
30	PVC Belt Conveyor 30	0	815	815	3.0	1210	1
31	PVC Belt Conveyor 31	0	815	815	3.0	1210	1
32	PVC Belt Conveyor 32	0	815	815	3.0	1210	1
33	PVC Belt Conveyor 33	0	815	815	3.0	1210	1
34	PVC Belt Conveyor 34	0	4881	4881	19.7	1010	1
35	PVC Belt Conveyor 35	0	6881	6881	10.6	1010	1
36	PVC Belt Conveyor 36	0	4881	4881	8.6	1010	1
37	PVC Belt Conveyor 37	0	6881	6881	19.7	1010	1
38	PVC Belt Conveyor 38	15.1	714	4948	16.1	1210	1

39	PVC Belt Conveyor 39	15.1	714	4948	16.1	1210	1
40	PVC Belt Conveyor 40	15.1	714	4948	16.1	1210	1
41	PVC Belt Conveyor 41	15.1	714	4948	16.1	1210	1
42	PVC Belt Conveyor 42	15.1	714	4948	16.1	1210	1
43	PVC Belt Conveyor 43	14.4	861	4942	16.3	1210	1
44	PVC Belt Conveyor 44	14.4	861	4942	16.3	1210	1
45	PVC Belt Conveyor 45	0	4684	4684	6.2	1210	1
46	PVC Belt Conveyor 46	-16.4	10217	8859	4.7	1210	1
47	PVC Belt Conveyor 47	0	7500	7500	4.3	1210	1
48	PVC Belt Conveyor 48	0	6750	6750	15.4	1210	1
49	PVC Belt Conveyor 49	0	9500	9500	7.7	1210	1
50	PVC Belt Conveyor 50	0	8750	8750	15.4	1210	1
51	PVC Belt Conveyor 51	0	4700	4700	13.0	1210	1
52	PVC Belt Conveyor 52	0	9141	9141	11.5	1210	1
53	PVC Belt Conveyor 53	0	4700	4700	8.6	1210	1
54	PVC Belt Conveyor 54	0	4700	4700	3.0	1210	1
55	PVC Belt Conveyor 55	0	2400	2400	19.7	1210	1
56	PVC Belt Conveyor 56	0	2400	2400	5.3	1210	1
57	PVC Belt Conveyor 57	14.9	2314	4679	9.0	1210	1
58	PVC Belt Conveyor 58	8.3	1508	4095	17.9	1410	1
59	PVC Belt Conveyor 59	0	6600	6600	5.8	1410	1
60	PVC Belt Conveyor 60	0	1616	1616	2.4	1410	1
61	PVC Belt Conveyor 61	-9.5	4047	1728	13.9	1410	1
62	PVC Belt Conveyor 62	0	4144	4144	6.2	1410	1
63	PVC Belt Conveyor 63	0	4144	4144	5.3	1410	1
64	PVC Belt Conveyor 64	10.4	5348	6433	5.8	1410	1
65	PVC Belt Conveyor 65	0	2162	2162	6.2	1410	1
66	PVC Belt Conveyor 66	0	4700	4700	19.7	1210	1
67	PVC Belt Conveyor 67	-10.8	4019	2157	9.8	1410	1
68	PVC Belt Conveyor 68	0	4250	4250	19.7	1210	1
69	PVC Belt Conveyor 69	0	4250	4250	19.7	1210	1
70	PVC Belt Conveyor 70	0	4250	4250	15.8	1210	1
71	PVC Belt Conveyor 71	0	815	815	3.0	1210	1
72	PVC Belt Conveyor 72	0	4144	4144	15.4	1410	1
73	PVC Belt Conveyor 73	-0.3	4200	4300	18.0	1210	1
74	PVC Belt Conveyor 74	-0.8	4200	4300	7.0	1210	1
75	PVC Belt Conveyor 75	-0.3	4200	4300	19.9	1210	1
76	PVC Belt Conveyor 76	15.5	4599	6829	8.2	1210	1
77	Belt Turn(90_deg) 1	A=0°	4700	4700	0.0	1210	1
78	Belt Turn(90_deg) 2	A=0°	4144	4144	0.0	1410	1
79	Belt Turn(90_deg) 3	A=0°	1616	1616	0.0	1410	1
80	Belt Turn(90_deg) 4	A=0°	4009	4009	0.0	1410	1
81	Belt Turn(90_deg) 5	A=0°	6600	6600	0.0	1410	1
82	Belt Turn(90_deg) 6	A=0°	4144	4144	0.0	1210	1
83	Belt Turn(90_deg) 7	A=0°	2400	2400	0.0	1210	1

84	Belt Turn(90_deg) 8	A=0°	4700	4700	0.0	1210	1
85	Modular Belt Conveyor 1	0	9250	9250	12.7	1238	1
86	Modular Belt Conveyor 2	0	7250	7250	12.7	1238	1
87	Modular Belt Conveyor 3	0	7250	7250	18.4	1238	1
88	Belt Turn(90_deg) 9	A=0°	4700	4700	0.0	1210	1
89	Belt Turn(90_deg) 10	A=0°	4144	4144	0.0	1210	1
90	Modular Belt Conveyor 4	0	9250	9250	18.4	1238	1
91	Telescopic Belt Conveyor(5/10)						4



10.3 Feedlines

Each Deck Loop CBS has a total 7 Automatic Feedlines with a Designed IPP of 2000 PPH.

1. Each Feedline has Four Conveyor Modules-
 - Orientation Conveyor- 1 Nos.
 - Weighing Conveyor- 1 Nos.
 - Buffer conveyor- 1 Nos.
 - Intelligent Merge- 1 Nos.
2. Sensors are placed on the Induct Lines to determine the exact position and dimensions (Length and Width) of the Shipment on the conveyor and prepare the Cross-Belt Cell for receiving the shipment with high precision.
3. Over the feedline, shipments are evenly spaced and smoothly transferred to the main Loop.

10.3.1.1 Orientation Conveyor

An Orientation conveyor is a type of conveyor system used to align & Release the products for induction onto CBS. It serves as the initial point of entry where products are collected and conveyed to subsequent stages of the process.

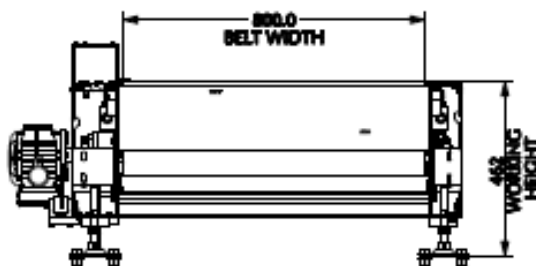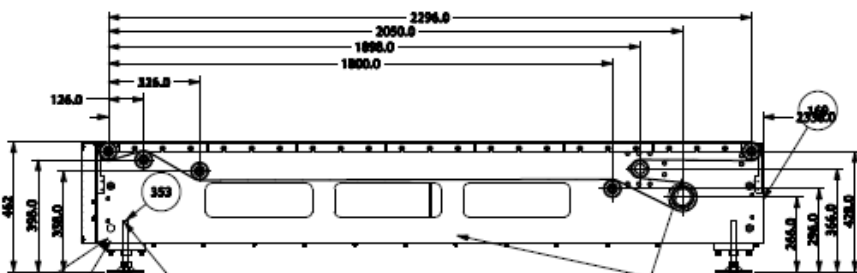

10.3.1.2 Weighing Conveyor

A weighing conveyor, also known as a weigh belt conveyor, is a type of conveyor system specifically designed to measure the weight of materials as they move along the conveyor belt. It combines the functions of conveying and weighing into a single integrated process. Weighing Conveyors equipped with high precision Load Cells to capture the weight of Shipments.


Make- Bizerba/ Mettler Toledo



10.3.1.3 Buffer Conveyors

A buffer conveyor, also known as a buffering conveyor or accumulation conveyor, is a type of conveyor system used to temporarily store or hold items in a controlled manner. Its primary purpose is to manage the flow of items between different stages of a production or handling process when there is a mismatch in the speeds or capacities of the upstream and downstream equipment.


This Conveyors required to maintain the Throughput of Line.

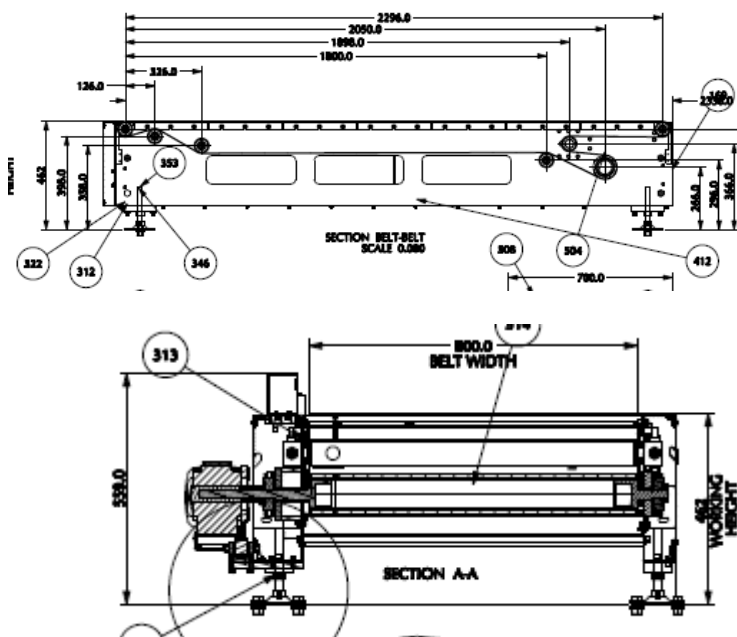

10.3.1.4 Intelligent Merge Conveyor

An intelligent merge conveyor is a type of conveyor system that incorporates advanced automation and control technologies to intelligently merge multiple conveyor lines or streams of materials into a single unified flow. It optimizes the merging process by dynamically adjusting the speed and position of items to ensure a smooth and efficient merge.

In the proposed solution this is 30° triangular high-speed conveyor used for inducing shipment/boxes directly on to the sorter. The Belts are Strip Belts for smooth shipment movement.

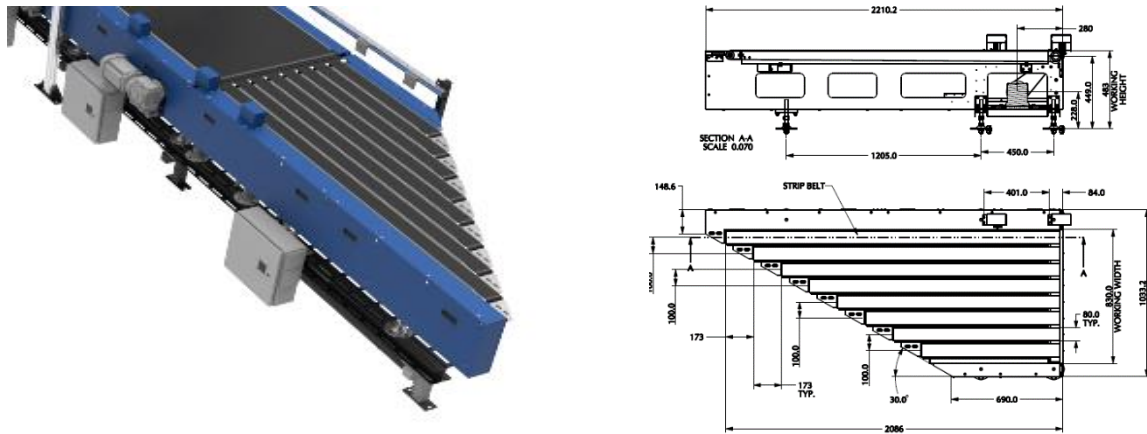


10.3.1.5 Irregular Chute

On each Feedline one irregular chute is planned. Any shipments which is not inductable on Sorter will be drop into this chute manually by Operators. Shipment will drop on irregular takeout conveyor via these chutes.




10.4 Irregular Takeout Conveyor

One conveyor for each induct zone is planned to takeout the irregular shipments. This conveyor will collect the shipments from irregular chutes and drop them in a bin for manual process.

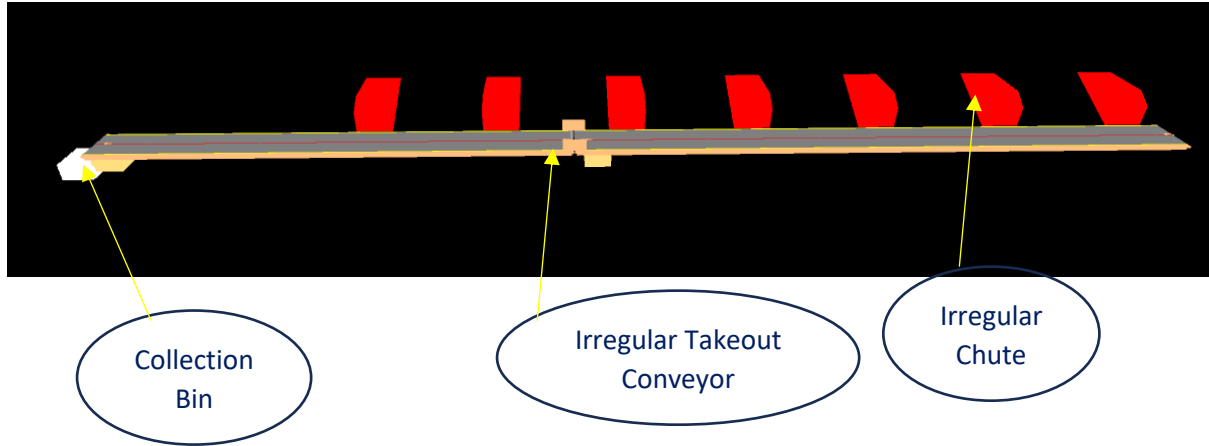


10.5 Main Loop

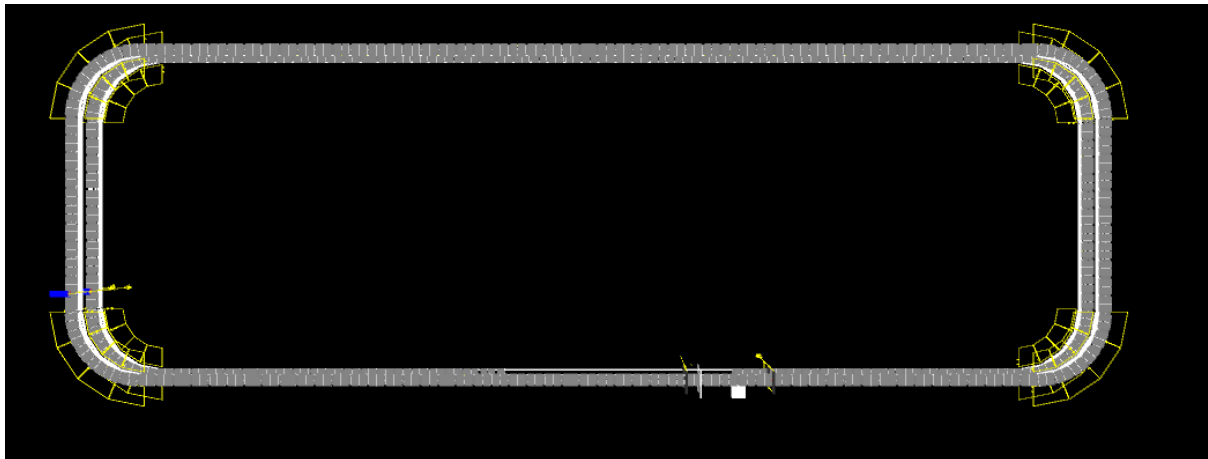

1. The proposed Double Deck CBS Sorter will be installed on mezzanine. The upper deck Sorter runs at 5200 mm from ground level and lower deck on 3200 mm from ground level.
2. We have provided loop with dual Belt Carriers with 1175 mm pitch and Belt Size of 495 x 800mm.
3. As Parcels pass through the Barcode Scanning Tunnel on the Loop, their barcodes are scanned, and chutes are assigned. Once the shipment reaches respective chute, carrier carrying the shipment for the chute, will actuate and drop the shipment in the assigned chute.

10.6 Sorting Output

10.6.1 PTL Chute

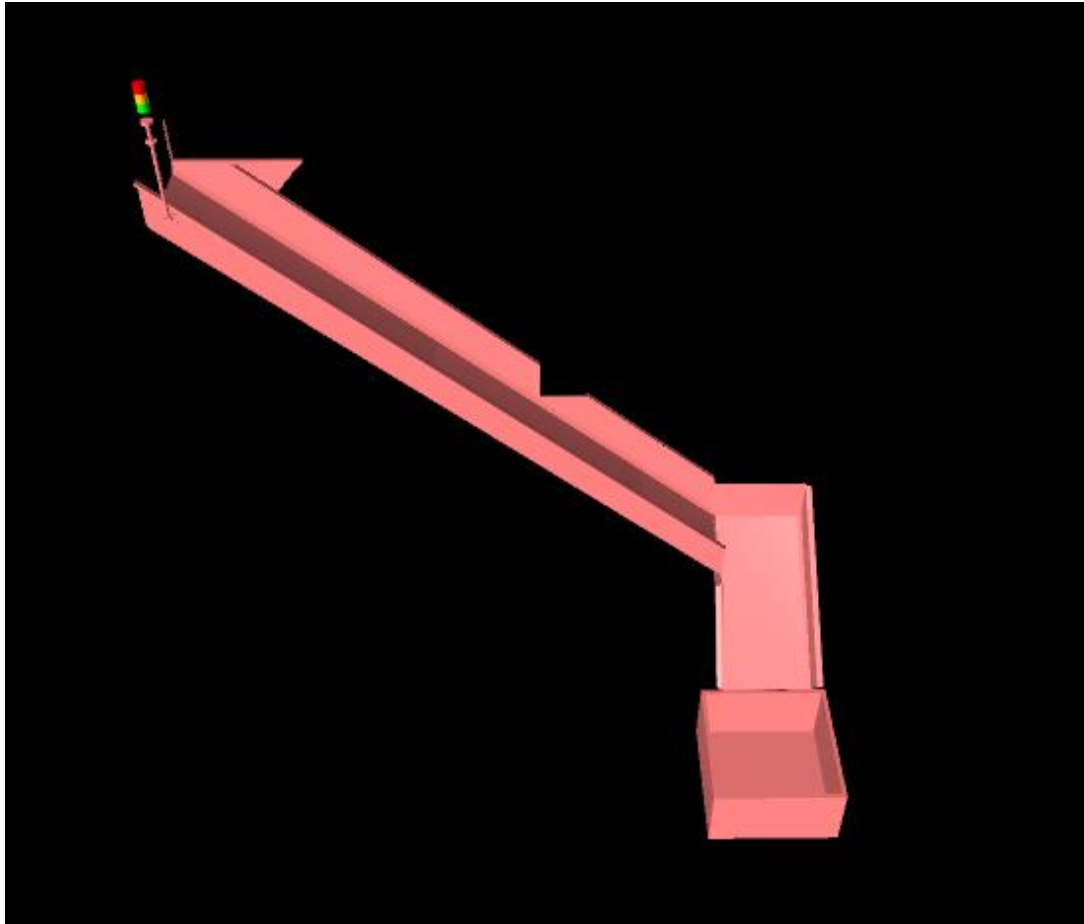

- These are collection type chutes where the parcels keep collecting into chutes.
- The Operators collect the parcels from chute and will do secondary sorting by means of PTL Racks.

Chute IOs	Description
Single Chute Full Sensor	To alert the system that the chute is full and mark that chute unavailable for further sortation.
Tower Lamp	To indicate the operator action on a chute
Push Button	To Suspend/Resume Sorting into a particular Chute


PTL Racks & Modules

- PTL Racks with PTL light modules has been provided for secondary sorting of parcels that have been dropped in the PTL chutes.
- Rack Configuration: 3 Rows, 3 Columns, total of 9 modules/rack in one chute.



- Operators will pick up a parcel from the PTL chute and scan the parcel barcode by handheld scanner.
- The light of the block in the PTL rack which has been mapped to the destination location of the parcel will glow.
- Operator will place the parcel in the bag framed in that module and acknowledge by pressing the confirmation button on the module.
- This process will be repeated for all parcels falling in that chute bin.
- Once a bag is full, the operator will take out the bag paste specific tag on bag seal and place it on the bag take-away conveyor.
- The new bag will be placed in the empty module.


10.6.2 Rejection Chute

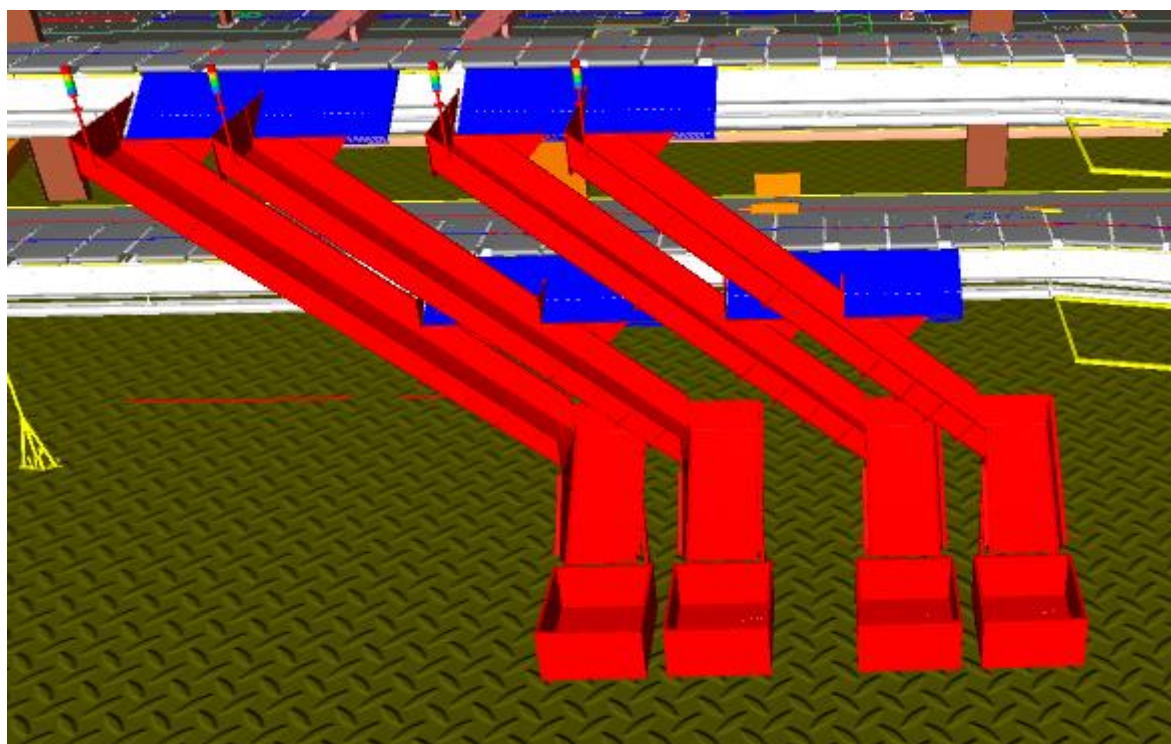

System is installed with 4 Nos rejection chutes (L Type Chutes). Once the parcel got rejected, it will stage on the Collection Bins for the manual process.

10.6.3 Collection Bin

Spring Loaded Bin is planned on each chute to collect the parcels.

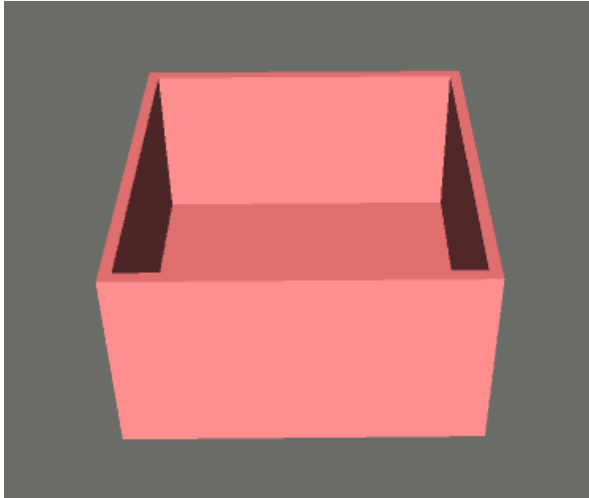

11. Proposed System Technical Details

11.1 Mechanical equipment

Pos.	Qty.	Description	Value
FM1	1	Infeed System - Powered Belt Conveyors - Modular Belt Conveyor - Curve Conveyor- 90 Degree - Telescopic Belt Conveyor (5+10)	~870 Metres (76 Conveyors) ~62 Metres (4 Conveyors) 10 Nos 4 Nos .
FM2	14	Feedlines Consists of - Loading Conveyor. - Weighing System - Dynamic Spacing System - Angle merge 2-D Hand Scanners for Manual Scanning	1 Set 1 Set 1 Set 1 Set 1 No.
FM3	1	Falcon Lower Deck Sorter 1 Loop Cross Belt Sorter - Sorter Height - Sorter Length - Sorter Speed - Sorter Drive - Carrier Pitch Including: - Standard Sorter Supports - Empty Carrier Detection System - Product Centring System - Camera based Barcode reader. - Dimension & 5 side Scanning System - E-Stops - Hooters - Fencing - Netting - Overshoot Assembly	3200 mm ~177 m ~2 m/s Linear Motor 1175 mm
FM4	1	Falcon Upper Deck Sorter 1 Loop Cross Belt Sorter - Sorter Height - Sorter Length - Sorter Speed - Sorter Drive - Carrier Pitch Including: - Standard Sorter Supports - Empty Carrier Detection System	5200 mm ~177 m ~2 m/s Linear Motor 1175 mm

		- Product Centring System - Camera based Barcode reader. - Dimension & 5 side Scanning System - E-Stops - Hooters - Fencing - Netting - Overshoot Assembly	
FM6	1	Chutes - PTL Chutes - Rejection Chute - Sliding Chute (Big Parcel Segregation on Infeed System) - VDS Chute - Irregular Chute - Spring Loaded Fixed Bin	96 Nos 4 Nos 6 Nos 14 Nos 14 Nos 103 Nos
FM7	1	PTL - PTL Racks for Chute - PTL Racks for Manual - PTL Modules - Hand scanner for PTL Racks - PTL Control Box - Server for Manual Setup	864 Nos 300 Nos 1164 Nos 121 Nos 121 Nos 1 No

11.2 Electrical Equipment

Electricals			
FE1	1	Consists of Main Power Distribution panel Main Control Panel Feedline Control Panels Sorter Drive Panels Network Switches Field Cabling	Included

11.3 Control System

Components			
FC1	1	Consists of Siemen's PLC based Control System with SCADA Industrial Switch	1 Nos. As per requirement

12. Description of Components of Equipment


Elements of the sorting system

1. Cross Belt Sorter
2. Scanning & Sensing on Sorter
3. Conveyor System
4. Steel Works- Mezzanine & Staircases

12.1 Cross Belt Sorter -


Cross Belt Sorter is capable of sorting extremely high volume of versatile products in a gentle manner.

Falcon's Cross belt sorter is powered by high efficiency linear motors and is based on 100% non-touch actuation technology leading throughput capabilities with extremely low noise levels. Falcon's Cross belt sorter is modular in design. It can be easily extendable as per future requirements

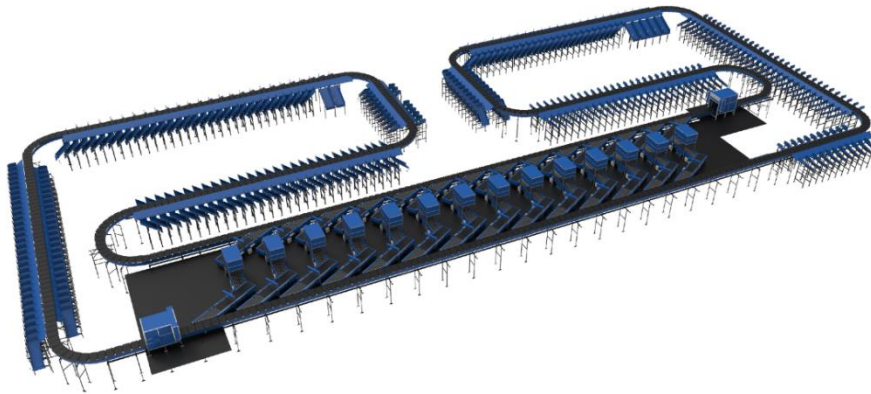

12.2 CBS Carrier

Falcon Autotech's CBS offers one of the highest Belt widths to Carrier Pitch Ratio in the market today. This additional belt width makes the system capable of handling larger product sizes without compromising on throughput. This also means reduced "dead area" between Carrier belts which drastically reduces the amount of "inbetweeners" and non-sortable parcel recirculation.

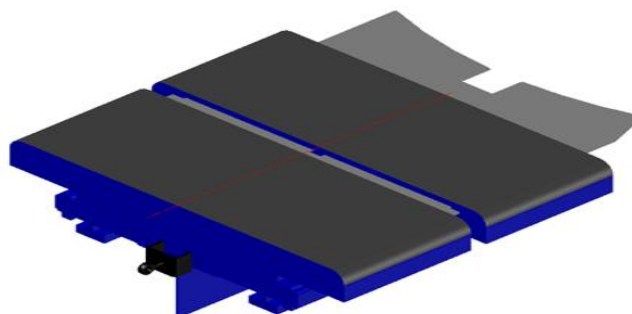

12.2.1 Servo Roller

High Powered DC Drive Servo Roller are used to actuate the carrier belts, thereby eliminating the need for complicated drive transfer mechanism, and simplifying the system installation and maintenance.




12.2.2 Chassis

Falcon Autotech's Cross Belt Carrier Chassis is made up of lightweight Aluminium which makes them light yet sturdy. This reduced weight leads to substantial "Power Savings" over a considerable period of usage.




12.2.3 Carrier Wheels

Carrier wheels that are thoroughly tested and proved for long life cycle.

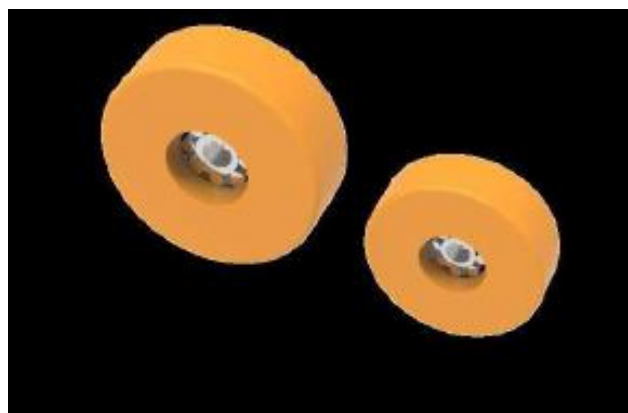

12.2.4 Friction Wheel Drive

Falcon can provide the indigenously developed Friction Wheel Drive (FWD) to drive the cross belt loop. This driving mechanism operates on the principle of friction, as the name implies. This unit comprises two independent motor-driven wheels that spin in opposite directions synchronised. FWDs are highly energy-efficient drives that promote **sustainability** compared to Linear induction/ synchronous motors.

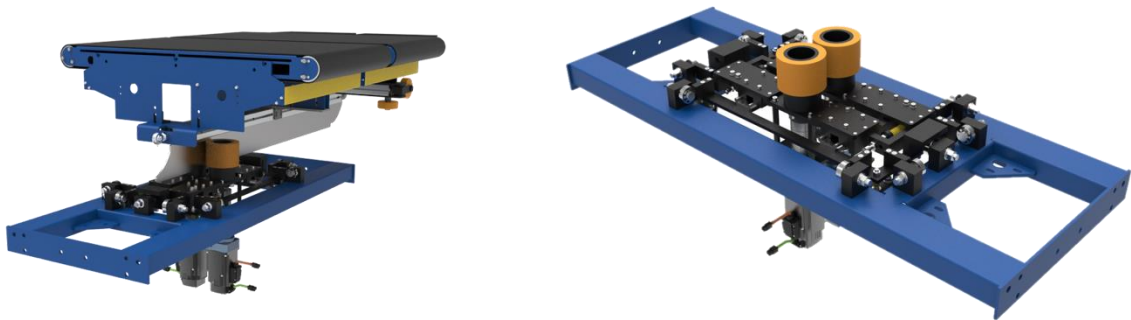


12.2.5 Non-contact based linear motor drive

No Contact based Linear Induction Motors that can be configured at variable speeds depending upon the operational requirements giving you the maximum flexibility when needed.





12.2.6 Power Transmission

Power transmission to Carriers over sliding contacts that require low maintenance and offer high levels of reliability.

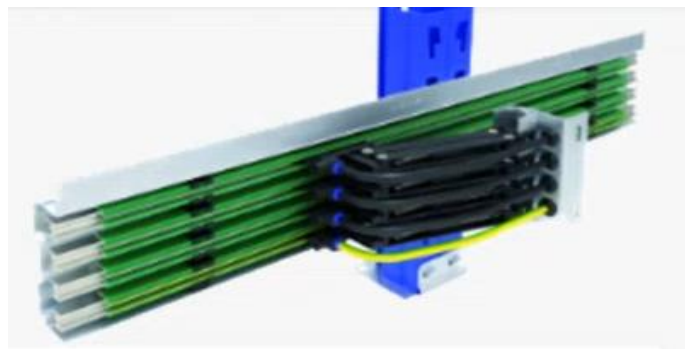


12.2.7 Data Transmission

The R-Coax cable is used for data distribution in the sorter. This is a leaky wave cable, that runs throughout the sorter length transmitting the data. There is one antenna present in the super master carriage, which keeps on receiving the signal from this cable while on the move, wirelessly.

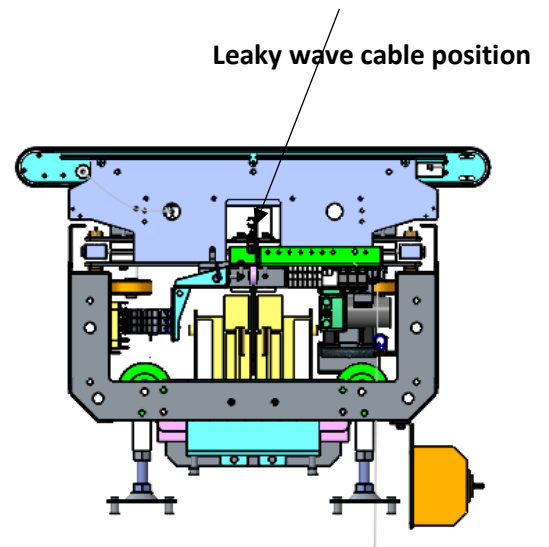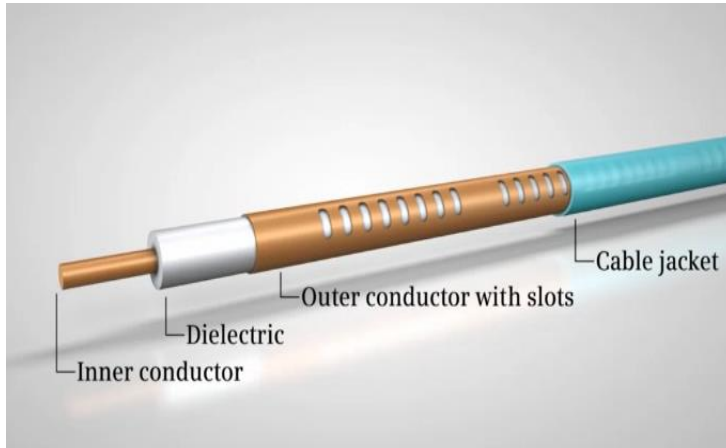

12.2.8 Carriers positioning System.

Positioning system determines the exact location of each carrier in the loop at any given point in time. There is a plastic tape strip of barcodes (QR Codes) that is running along the sorter loop, which is continuously scanned by scanners placed on a Carrier (Master Carrier)

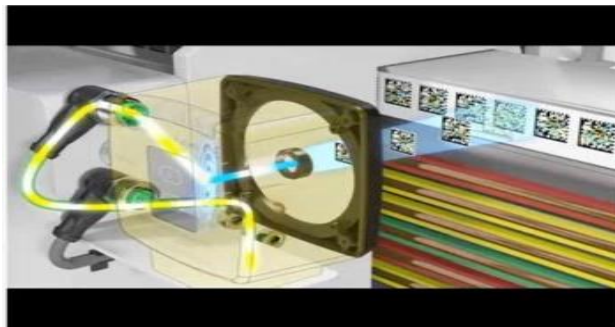

12.2.9 Technical specifications of Sorter

Items	Make
Sorter Carrier Type	Loop CBS
Sorter Speed in m/s	Up to 2 m/s
Sorter Loop Length Per Deck	~177 m
Sorter Actuation Technology	Electric
Chutes	
PTL Chutes	96
Rejection Chute	2
Irregular Chute	14
Height of Sorter Upper Deck	~5200 mm
Height of Sorter Lower Deck	~3200 mm
Track Material to move the Carrier trolleys	~Steel Track
Carrier Design	
Carrier Motor Make	Falcon
Carrier Pitch - mm	1175
No. of Carriers	151 Nos. per deck
Drives	
Motor/Drive type	Linear Induction Motor
Power Consumption	Will be specified during Detailed Design
Power and Data Transmission	
Power Transmission	Over Continuous Bus Bar
Empty Carrier Detection System (Camera Based)	01 Nos per Zone
Maintenance Speed of the Sorter- Jog Mode	0.8 m/s
Area Requirement (L x B)	Refer Layout

12.3 Scanning & Sensing on Main Sorter Loop

12.3.1 Automatic Barcode Scanning & Dimensioning System

Top Sided Barcode Scanner to scan parcel 1D codes and 2D codes. The Scanner is also capable of Archiving Shipment Images in Real time.



12.3.2 Parcel Positioning System.

Falcon Cross Belt Sorter is equipped with Multiple parcel positioning Scan Tunnels. A tunnel comprises of a series of high Precision Laser Scanners that detect the absolute position of the Parcel on the Cross-Belt Carrier and prepares the Carrier for discharging the product accurately into the chute (virtual centring) and physically bring the product to the centre of cross belt carrier (Physical centring).



12.3.3 Empty Carrier Detection System

This system detects the empty carriers on the sorter and prepares the Feedlines to load the parcels on the empty carriers. (Camera based)




13. Electrical System


Main power supply will supply Falcon's PDP (Power Distribution Panels) electrical cabinets. PDP cabinets supply the entire system via secondary cabinets:

- Main Control Cabinet
- Induct Control Panels
- Remote Cabinets for Sorter I/O
- Scanner Control cabinets


13.1.1 Reference Picture of Power Distribution Panel

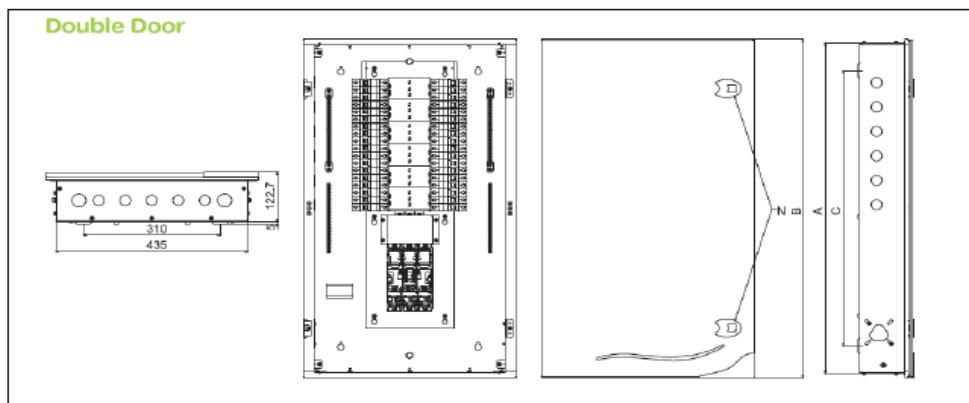

13.1.2 Main Control Panel (Reference)

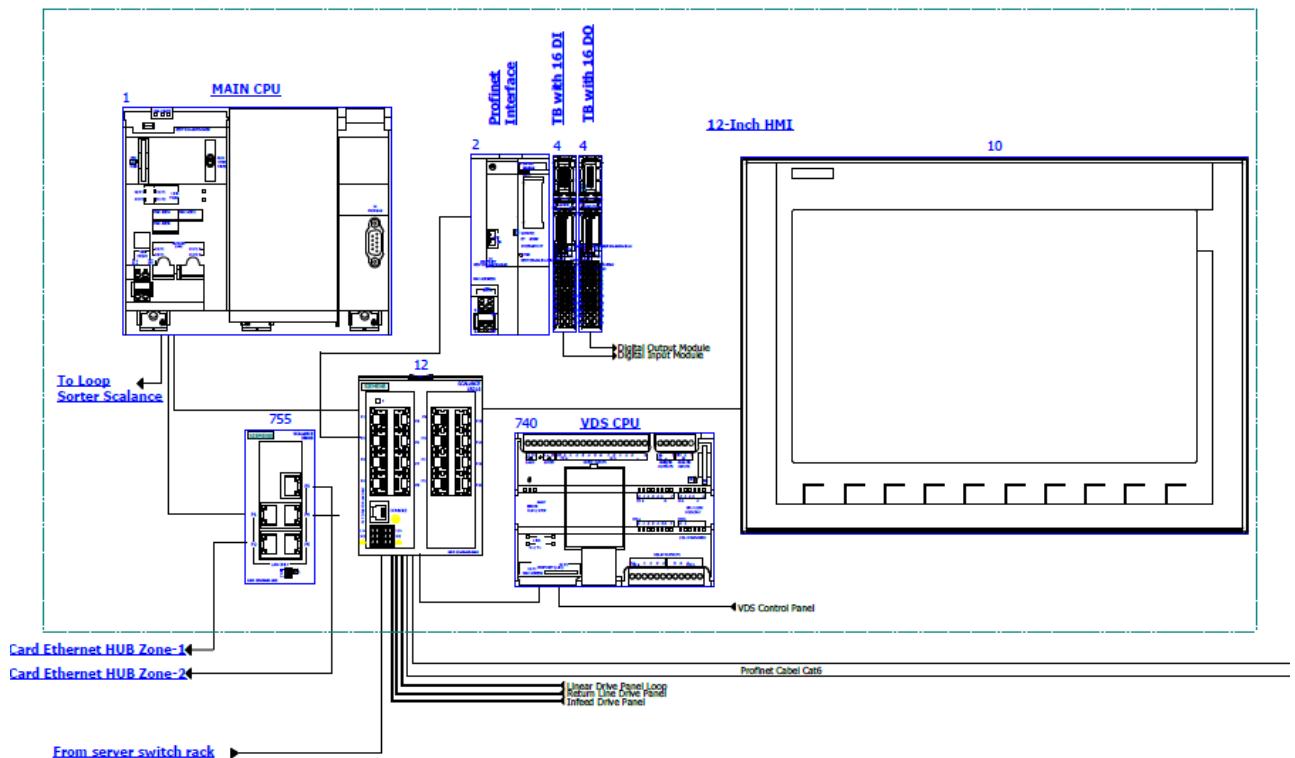

13.1.3 Induct Stations Control Panel (Reference)

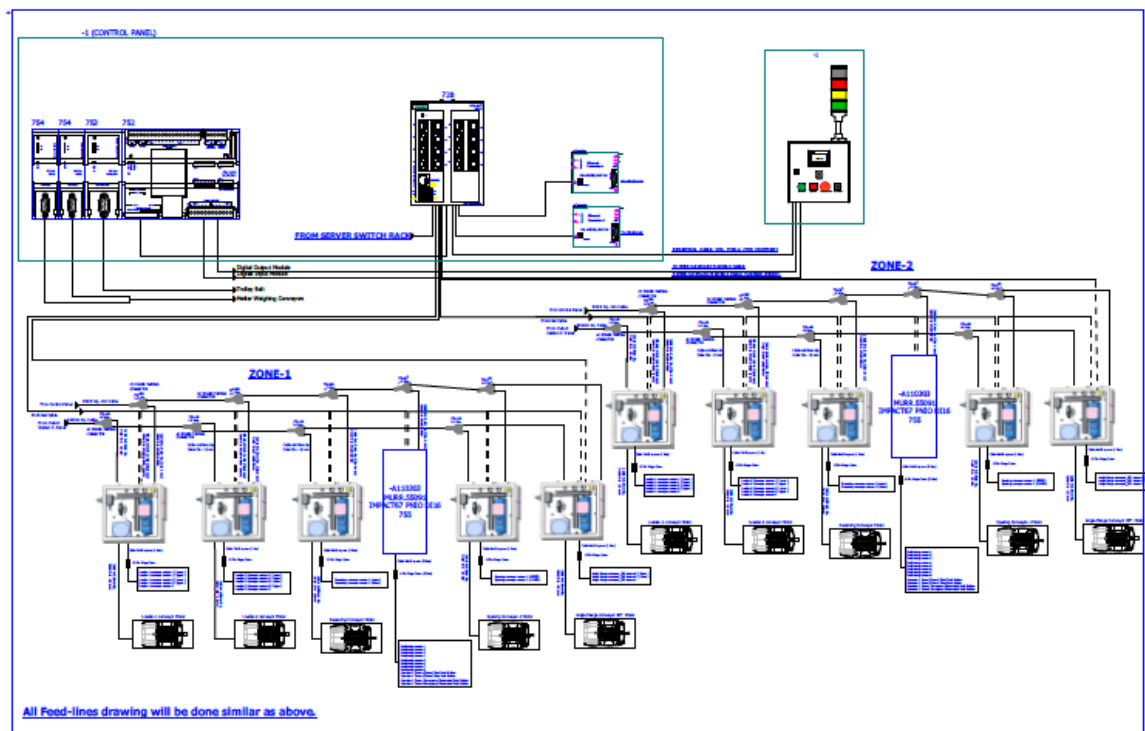

Engines

Three-phase alternating current motors (Induction) will be used through a frequency converter. The engines will be coupled with a converter to improve consumption and reduce the carbon footprint. All motors will have appropriate IP ratings

Sensors

The sensors will be supplied, standardized by type, with connector, with a cable length suitable for easy extraction, suitably protected from possible impacts.


Control command

The proposed solution is based on SIEMENS Programmable Logic Controller technology (PLC) platform. The entire system will be logically divided into Zones (Sorter/ Feed Line/ Loop), each managed by a PLC. The planned primary communication protocol is going to be ProfiNet.


Conveyor interface

The frequency converter of each conveyor allows the acquisition of the signals of the sensors/actuators/GIOs associated with it (e.g. conveyor end detection photocells, blockage detection photocells). Each frequency converter will be connected in series by means of the ProfiNet field bus

14. Controls Architecture (Ref.)

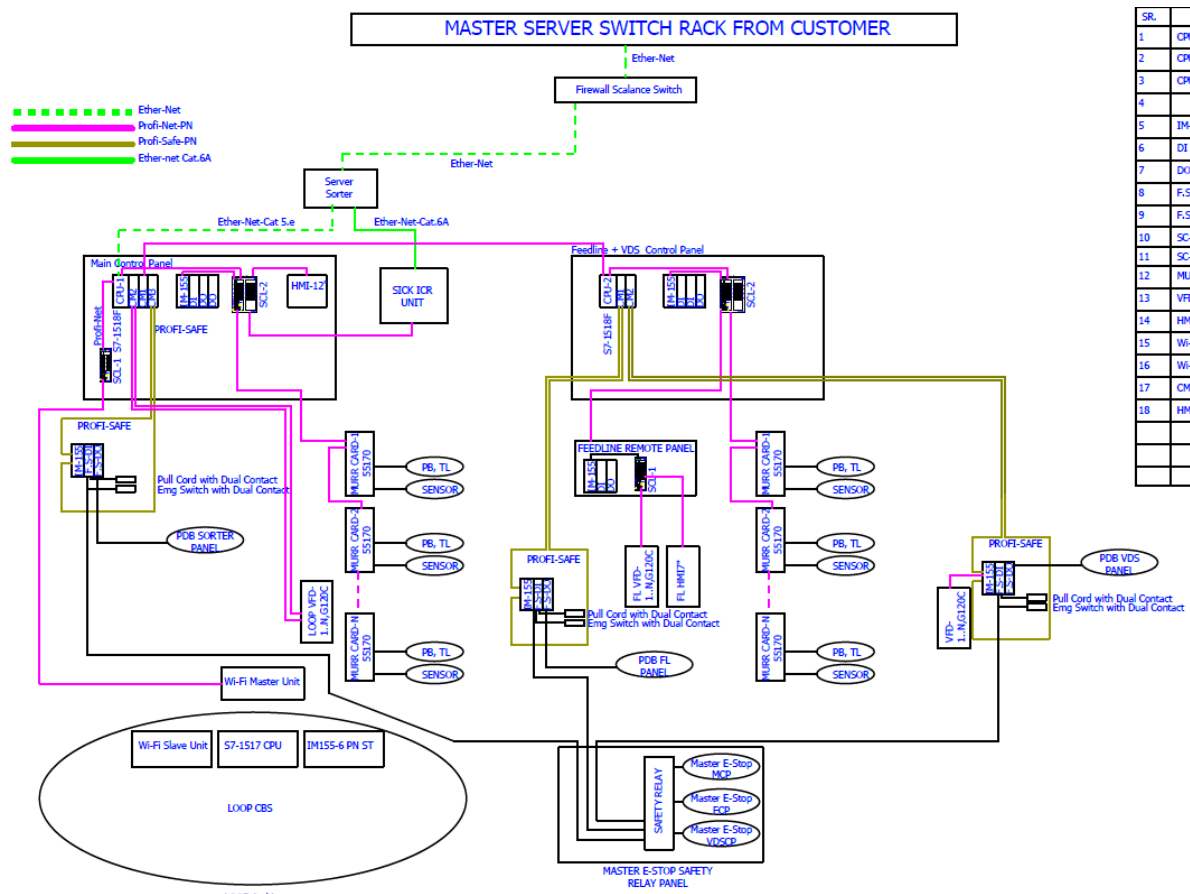

15. IT Architecture (Ref.)

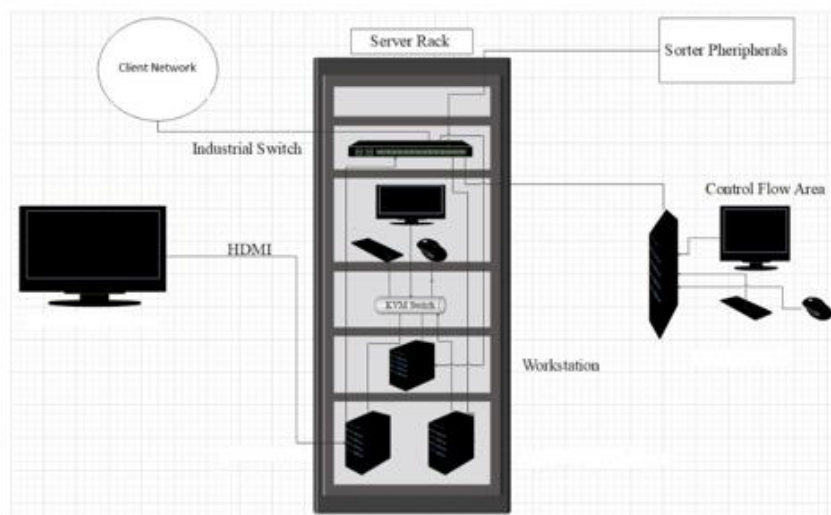

16. Falcon's Visual Inspection System (SCADA)

SCADA stands for Supervisory Control and Data Acquisition. It is a system of hardware and software components that allows for remote monitoring, control, and data acquisition of industrial processes or facilities


The Visualization system provided by FALCON (or SCADA) allows the monitoring and control of the different systems delivered for the St. Aunes Hub. This SCADA system receives from each monitored sub-system all information on their operating status in real time.

At the system monitoring level, the functions performed are:

- Field data acquisition.
- Animated visualization of equipment.
- Representation of the operating mode of the system (nominal, contingency, etc.).
- Alarm management.
- Alarm history management.
- Diagnostic help.
- Failure detection.
- Equipment control.
- Statistics on equipment operation.
- Historical Statistical Report.
- Recording and archiving.
- Safety operator interface.

16.1 FIELD DATA ACQUISITION


The field data acquisition function is performed by the SCADA system connected to the sorters' PLCs. The communication with the PLCs is done using equipped CPU cards that are able to manage the communication with the PLC on the Industrial Ethernet network, without overloading the server. The acquisition of signals from external systems is carried out via the PLC, using dry contacts.

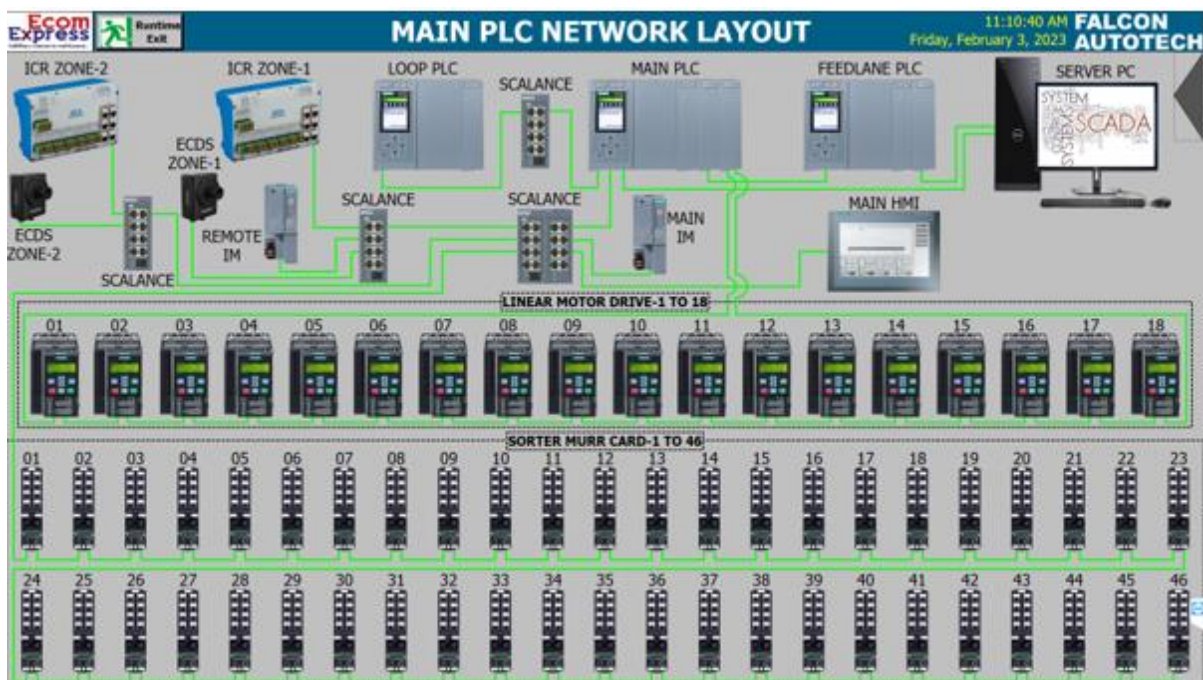


16.2 ANIMATED SYSTEM VISUALIZATION

The animated view represents the dynamic graphical user interface that allows real-time monitoring of the controlled systems and the execution of their control procedures.

The various states of the digital signals are displayed on the screen by graphic symbols. All views are web based with responsive capabilities when required so that various devices can be used to display status and information on PC. The types of information that can be displayed on each type of device will be discussed during the design phase of the project.

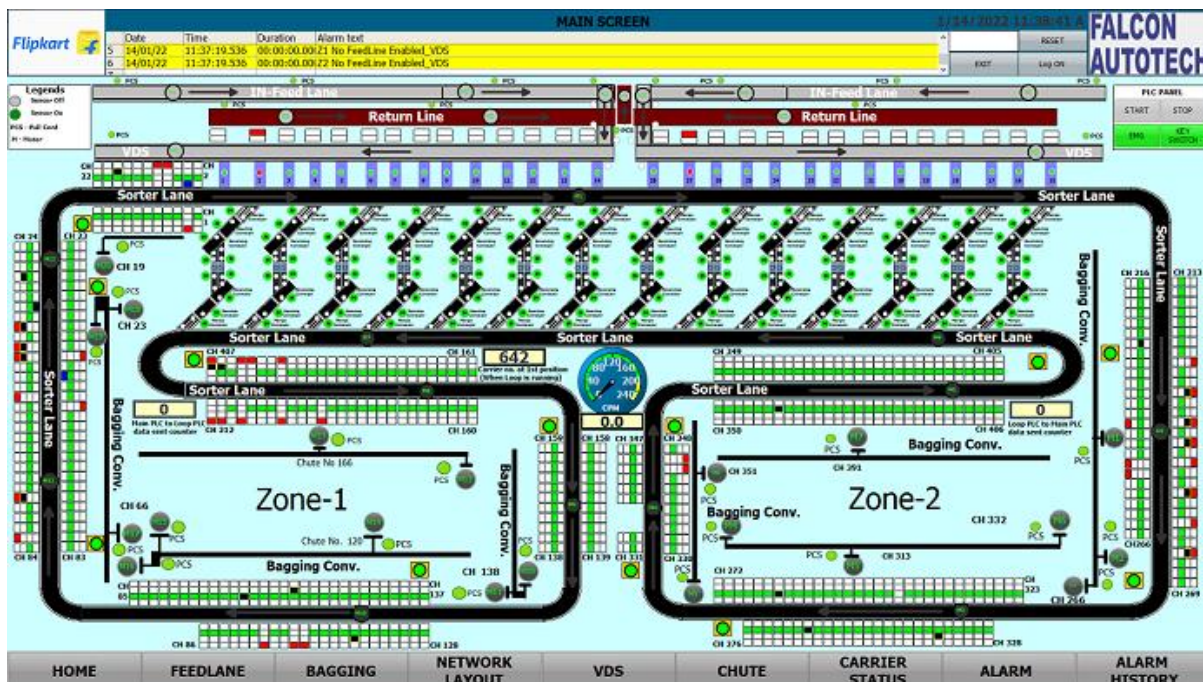

Example of a synoptic view

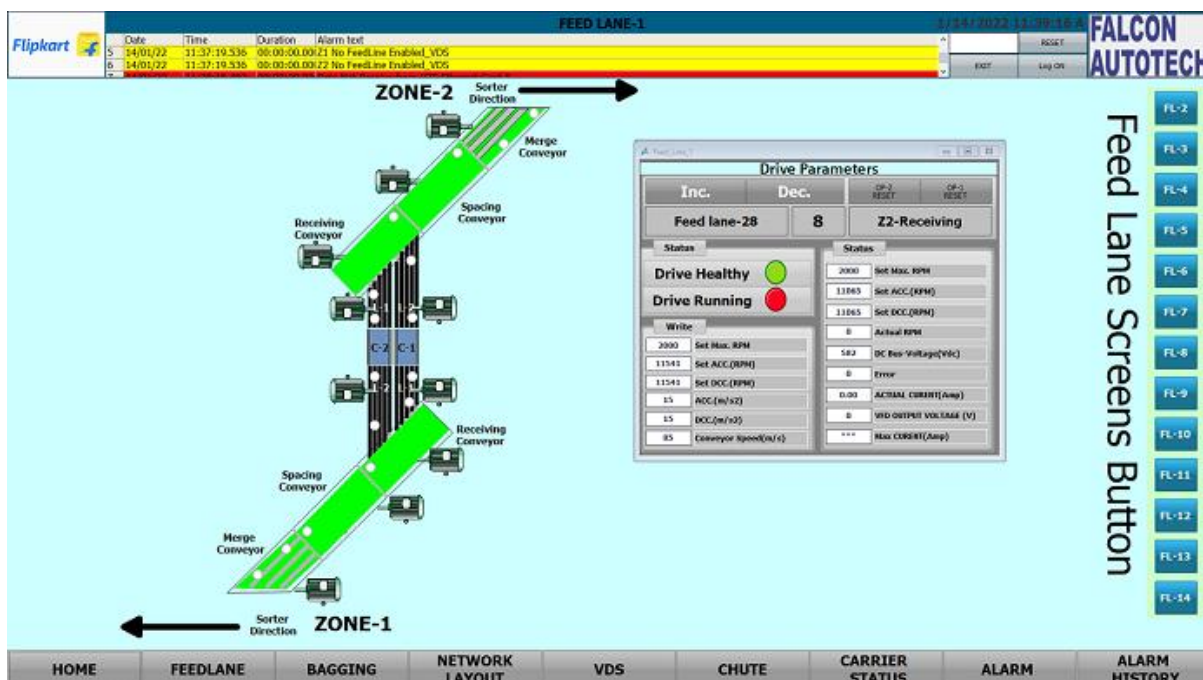

16.3 ALARM MANAGEMENT


The alarm pages display a series of information to identify the nature of the alarm or event, the elements involved and the time.

The alarm management includes:

- The Alarm name.
- The date on which the above-mentioned alarm was activated.
- The moment the alarm goes off.
- The date on which the alarm is activated again.
- The moment the alarm is activated again.
- The sub-system that activated the alarm.
- The area where the alarm was triggered.
- The name of the beacon that activated the alarm.
- The alarm state.
- The alarm value.
- A complete alarm description.

The historic data of each alarm is stored in the SCADA database. This type of fault detected includes:

- ✓ Sensors.
- ✓ Drive Fault.
- ✓ Lack of monitored equipment.
- ✓ Etc.

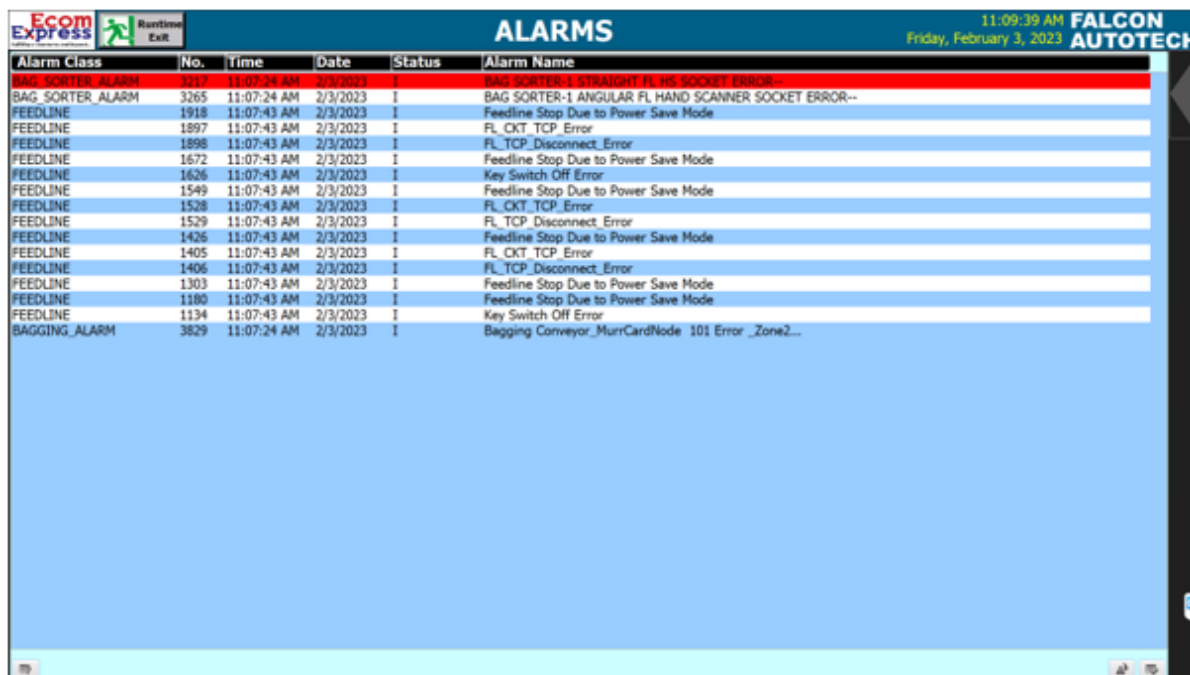

Ecom Express		Runtime Exit		ALARMS		11:09:39 AM FALCON AUTOTECH Friday, February 3, 2023	
Alarm Class	No.	Time	Date	Status	Alarm Name		
BAG SORTER_ALARM	3117	11:07:24 AM	2/3/2023	1	BAG SORTER-1 STRAIGHT FL HS SOCKET ERROR--		
BAG SORTER_ALARM	3265	11:07:24 AM	2/3/2023	1	BAG SORTER-1 ANGULAR FL HAND SCANNER SOCKET ERROR--		
FEEDLINE	1918	11:07:43 AM	2/3/2023	1	Feedline Stop Due to Power Save Mode		
FEEDLINE	1897	11:07:43 AM	2/3/2023	1	FL_CKT_TCP_Error		
FEEDLINE	1898	11:07:43 AM	2/3/2023	1	FL_TCP_Disconnect_Error		
FEEDLINE	1672	11:07:43 AM	2/3/2023	1	Feedline Stop Due to Power Save Mode		
FEEDLINE	1626	11:07:43 AM	2/3/2023	1	Key Switch Off Error		
FEEDLINE	1549	11:07:43 AM	2/3/2023	1	Feedline Stop Due to Power Save Mode		
FEEDLINE	1528	11:07:43 AM	2/3/2023	1	FL_CKT_TCP_Error		
FEEDLINE	1529	11:07:43 AM	2/3/2023	1	FL_TCP_Disconnect_Error		
FEEDLINE	1426	11:07:43 AM	2/3/2023	1	Feedline Stop Due to Power Save Mode		
FEEDLINE	1405	11:07:43 AM	2/3/2023	1	FL_CKT_TCP_Error		
FEEDLINE	1406	11:07:43 AM	2/3/2023	1	FL_TCP_Disconnect_Error		
FEEDLINE	1303	11:07:43 AM	2/3/2023	1	Feedline Stop Due to Power Save Mode		
FEEDLINE	1180	11:07:43 AM	2/3/2023	1	Feedline Stop Due to Power Save Mode		
FEEDLINE	1134	11:07:43 AM	2/3/2023	1	Key Switch Off Error		
BAGGING_ALARM	3829	11:07:24 AM	2/3/2023	1	Bagging Conveyor_MurrCardNode 101 Error_Zone2...		

Sample Alarm History Screen

17. Key Components Make

Items	Make
Belts	Forbo/ Derko
Rollers	Falcon
Cross Belt Carriers	Falcon
Linear Induction Motors	Falcon
Feed Line Motors	Induction Motors – SEW/ Lenze
Volume Scanners	SICK
Encoders	SICK/Falcon
Sensors	Sick/Leuze/ P&F
PLC	Siemens's
Control Panels	Rittal/ BCH
Weighing Scales	Bizerba/Equivalent
VFDs	Siemens/Lenze
Cables	LAPP Equivalent
Switch Gear	Schenider/Equivalent
Bearings	NTN/SKF/Equivalent
Data Transmission System	Siemens
Power Transmission Systems	Vahle
HMI's	Siemens

18. Program Organisation

18.1 Program/ Project Schedule

System will be ready for UAT by Mid of June 2024 .

** , detailed plan will be shared during DAP.*

18.2 Program Management

For this program, proposed approach covers the following aspects:

1. Creation and monitoring of the project plan.
2. Communication with DELHIVERY
3. Weekly/Fortnightly Meeting DELHIVERY to share the Project Status.
4. Scheduling of the resource management.
5. Management of risks and opportunities.
6. Management of the requirements.
7. Management of the list of anomalies or reservations.

19. DELHIVERY'S Responsibility

19.1 DELHIVERY Responsibilities During the Assembly and Commissioning Phase

- Provision of the site complex and office area facilities.
- The possibility of authorizing access to the site and the execution of the installation work up to 7 days a week and 24 hours a day if deemed necessary and if requested by FALCON.
- Free provision, during the installation phase, of the power supply necessary for the installation activities (estimated at 20 kW).
- Provision, during the commissioning phase, of the power supply necessary for the operation of the parcelsorting system free of charge at the date of FALCON need.

- Provision of the IT system functionality in accordance with the specification at the date of FALCON need.
- The customer is responsible for a safe working environment.
- The customer makes arrangements for the working area(s) to be protected against direct weather influences.
- The customer provides adequate lighting, heating, and ventilation to create a normal working environment.
- The cost of temporary storage that may be required (other than in the immediate vicinity of the installation site) is not included in the scope of delivery of this quotation. This also applies to temporary storage that may be required because materials are ready for delivery (in accordance with the schedule) but cannot be delivered due to hold-ups on the customer's side.
- The customer is responsible for the demarcation of aisles and danger zones with floor paint.

19.2 Responsibilities of DELHIVERY During the Tests

- Provision of the test loads and barcode labels required for the tests.
- Provision of personnel required for test activities (loading and unloading operations).
- Provision of the necessary information to sort the parcels correctly.
- Verify with FALCON the quality and conformity of the test loads (labels, cartons).
- Will need to provide the necessary staff to collect information on the tests and to verify and confirm test results with FALCON.

19.3 DELHIVERY Responsibilities During the Training

- Free from their usual work, the employees participate in the training for the duration of the training.
- Provision of a list of participants for each available training course 3 days before the start of the course.
- Provision of a classroom equipped with a whiteboard, video projector, projection screen, and enough space for desks or tables and chairs for the trainer and trained staff.
- check the prerequisites of the people who have to follow the training, e.g. the qualifications of the technical staff.
- The invitation of staff to attend the training courses will be at the expense of DELHIVERY.

20. Warranty Period

Falcons offered System comes with a standard warranty of 1 year (**Starts from the date of beneficiary use**) and post completion of warranty, customer can opt for Extended warranty.

Warranty covers the following support:

- 24 X 7 Telephonic, Email and Remote Service Support when required.
- Regular Software updates and Bug Fixes.
- Supply of Mechanical and Electrical components in case of failure (excluding damages as mentioned in Exclusion Clause)

The warranty does not apply to replacement or repair of:

- Normal wear and tear.
- Consumables.
- Faulty articles continued:
 - Failure to comply with the manufacturer's recommendations (logistics documentation, Technical Information Note, retrofit document) and the rules of the trade.
 - Negligence or abnormal use of equipment.
 - Anomalies produced by an environment of use, storage or transport that does not comply with the specifications or recommendations of Falcon: packaging, temperature, hygrometry, sector, insulation, etc.
 - A defect due to a cause external to the supplies and services of Falcon.
- Equipment other than that supplied by Falcon.
- Items that can be repaired exclusively by Falcon that have been repaired or attempted repairs other than those carried out by Falcon.
- Items that fail due to normal wear and tear of one or more of its components or whose tamper-evident seals (varnish, strip, etc.) have been broken or whose serial numbers have been removed or modified.
- Items damaged during transport to Falcon due to the use of unsuitable packaging.

21. Commercial Terms

21.1 Price Sheet

S. No	Component	Qty per set	Set	UOM	Total(INR)
1	Loop Cross Belt Sorter with VMS, ICR(Upper Deck)	1	1	Set	₹ 5,36,46,717
2	Loop Cross Belt Sorter with VMS, ICR(Lower Deck)	1	1	Set	₹ 5,20,97,940
3	Conveyors	1	1	Set	₹ 5,75,94,666
4	Chutes & Its Accessories	1	1	Set	₹ 1,55,03,051
5	Telescopic Belt Conveyor (5+10)	1	4	Nos	₹ 53,20,000
6	PTL & Its Accessories	1	1	Set	₹ 1,44,63,840
7	Software Packages & Tool Kit	1	1	Set	₹ 11,79,800
8	Installation & Commissioning	1	1	Set	₹ 49,67,650
9	Packaging & forwarding	1	1	Set	₹ 19,87,060
10	Project Management and Engineering Charges	1	1	Set	₹ 8,27,043
Total					₹ 20,75,87,767
BCA (5%)					₹ 1,03,79,388
Final Price					₹ 19,72,08,378

The Total Price is to be understood.

- Freight- Excluded
- Taxes: Extra as Applicable
- Including Packing and Forwarding
- Installation and Commissioning: Included
- Price is valid for 60 days from the date of proposal.

*Material Unloading & Laydown area are in customer scope

21.2 Payment Terms

S.No	Percentage	Stage
1	40%	Along with Purchase Order within 7 days of contract signing
2	50%	Against Delivery of material at site with 100% Taxes on Pro Data Basis
3	10%	Against Installation & Commissioning

**All invoices (if due as per payment terms) should be cleared within 30 days from the date of receipt of undisputed invoice by the buyer*

22. Exclusions

The scope of supply includes all parts which are defined in the Supplier's quotation.

All other parts which are not defined in the Supplier's quotation do not belong to the Supplier's scope of supply and are excluded. The following parts are also excluded:

- **Construction Power**
- **Mezzanine**
- **Steel Works- If not specified**
- **PC for SCADA.**
- Building infrastructure; building structure, doors, fire exits, levelling devices, building extinguisher and fire alarm system, building heating and lighting system.
- Electrical power supply and wiring to the main control cabinets.
- UPS for Controls and Drives
- Network Cabling up to the Main Server Rack
- Intermediate wiring to parts which are to be supplied by the Purchaser/others
- Emergency/Uninterruptable power supply
- Fire-alarm and fire protection devices
- Traffic and route markings
- Laydown Area
- Ram protection devices
- Cat walks, bridges, maintenance aisles and platforms
- Assembly tools like forklifts and hoisting machines
- All kind of network incl. Local Area Network (LAN/WLAN), exceeding the scope described in Scope of Supply
- Any Kind of Civil work
- Any adjustment of the Supplier's scope of supply to local rules and regulations
- X-Ray machines
- Roller cages/ Pallets
- **Simulation and 3D animation of the sorter system**
- Interface with other equipment not specified in this offer.
- Provision of facilities for the control room (furniture, air conditioning, heating, etc.).
- The supply and installation of fencing around the different corridors.
- Any item specifically indicated as not forming part of the subject matter of the Seller's supply in the offer documentation.