




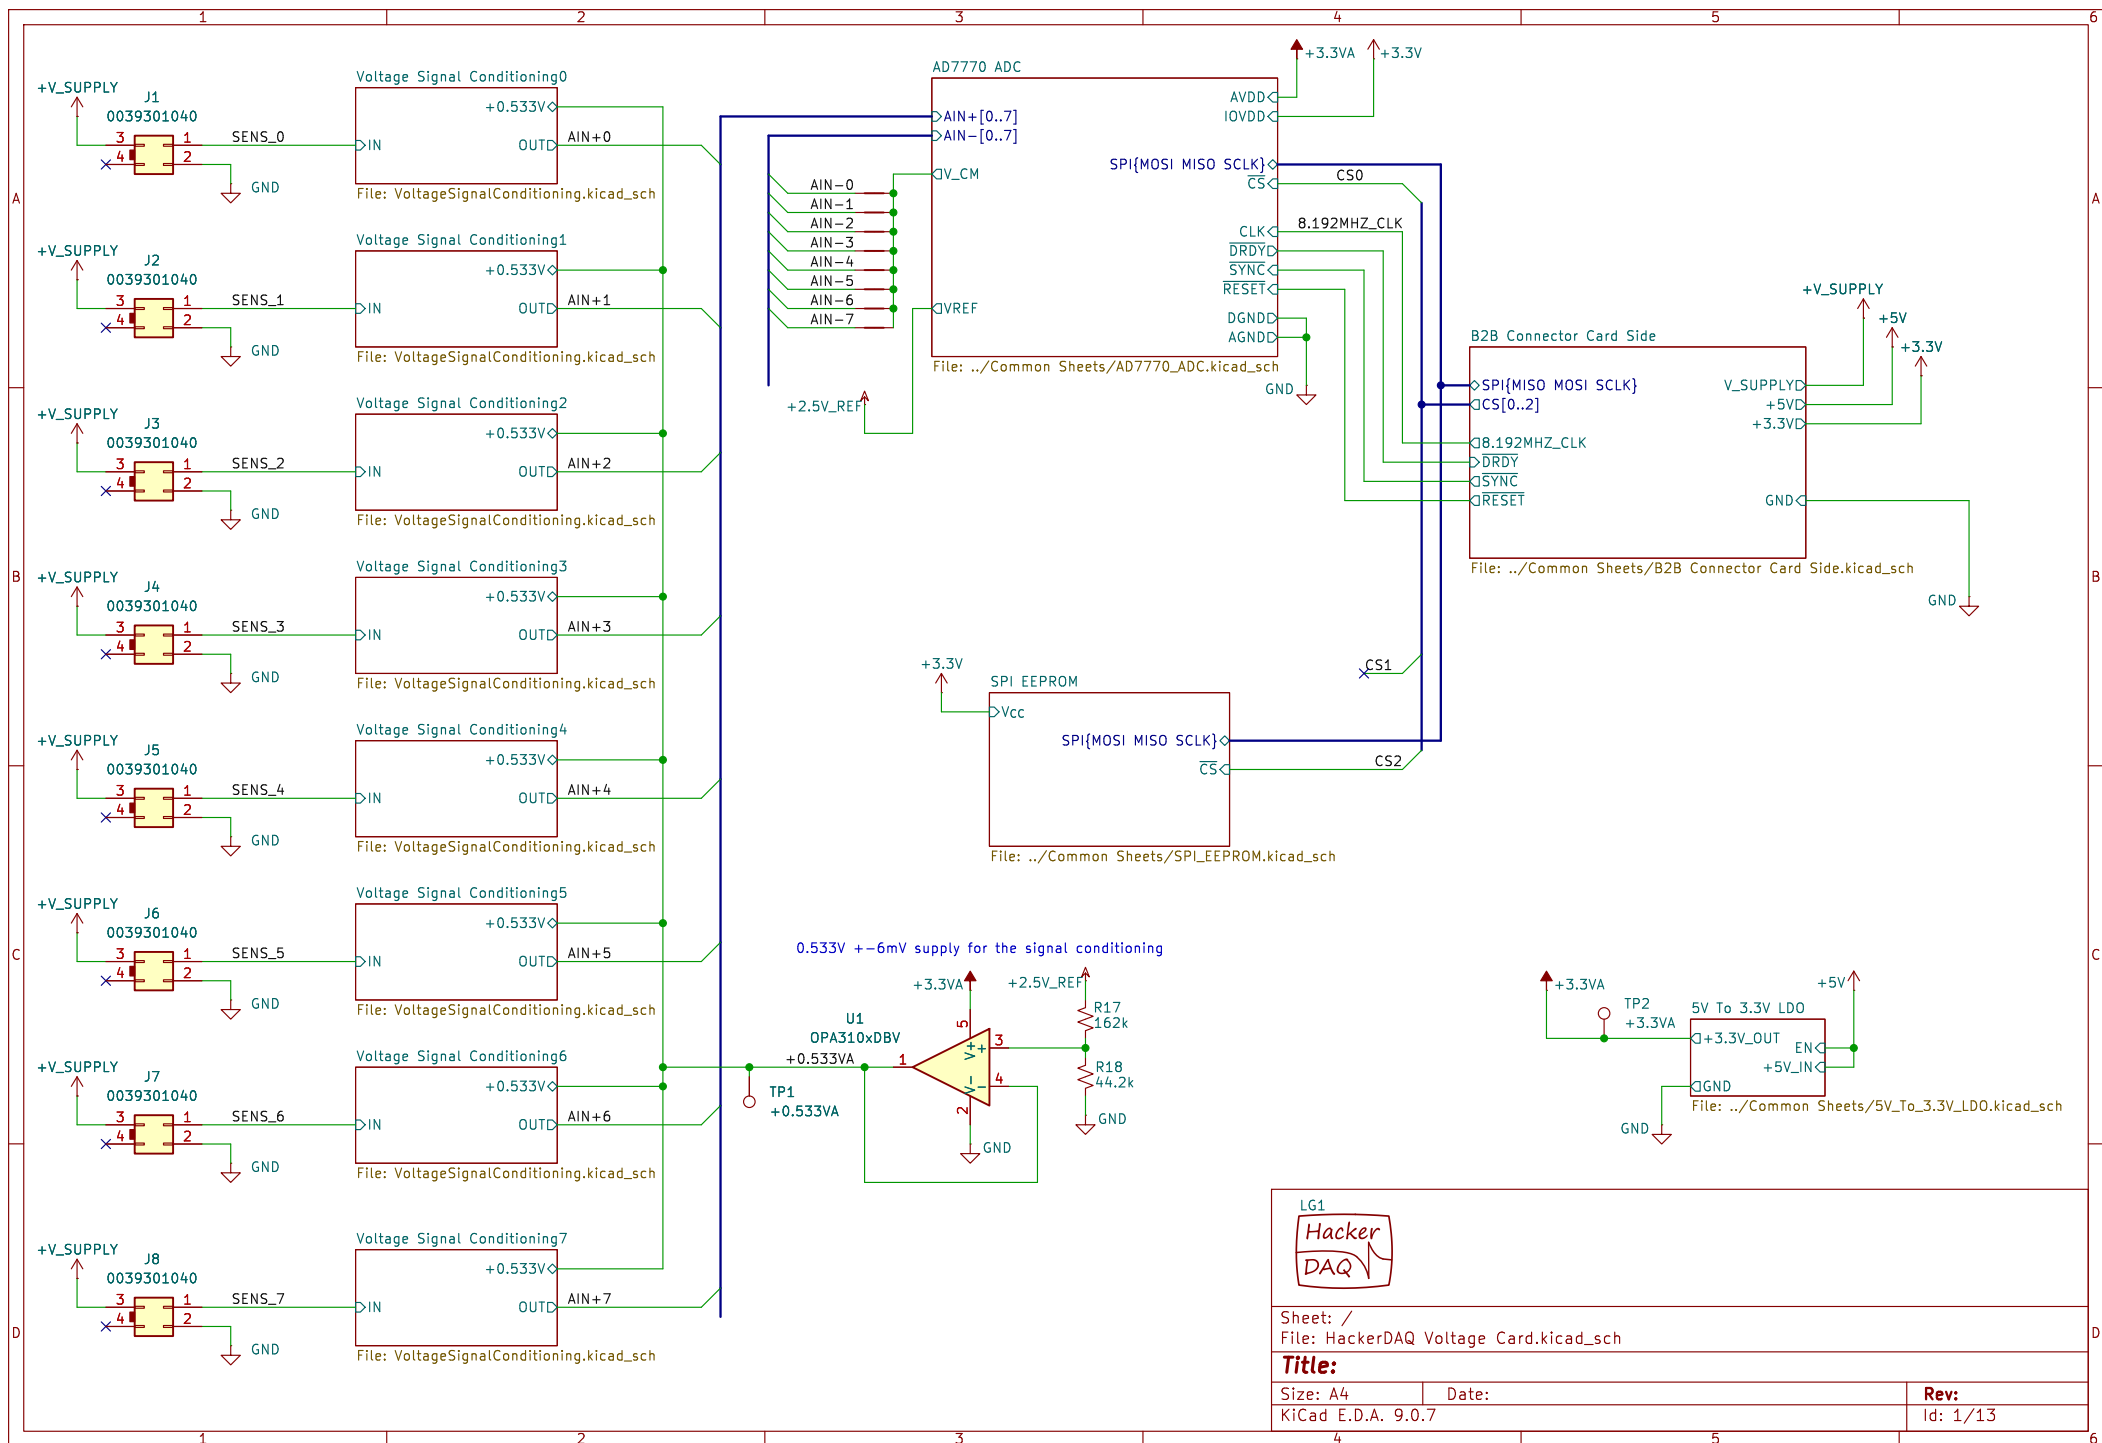


LG1 HackerDAQ		
Sheet: / File: HackerDAQ Voltage Card.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7	Id: 1/13	

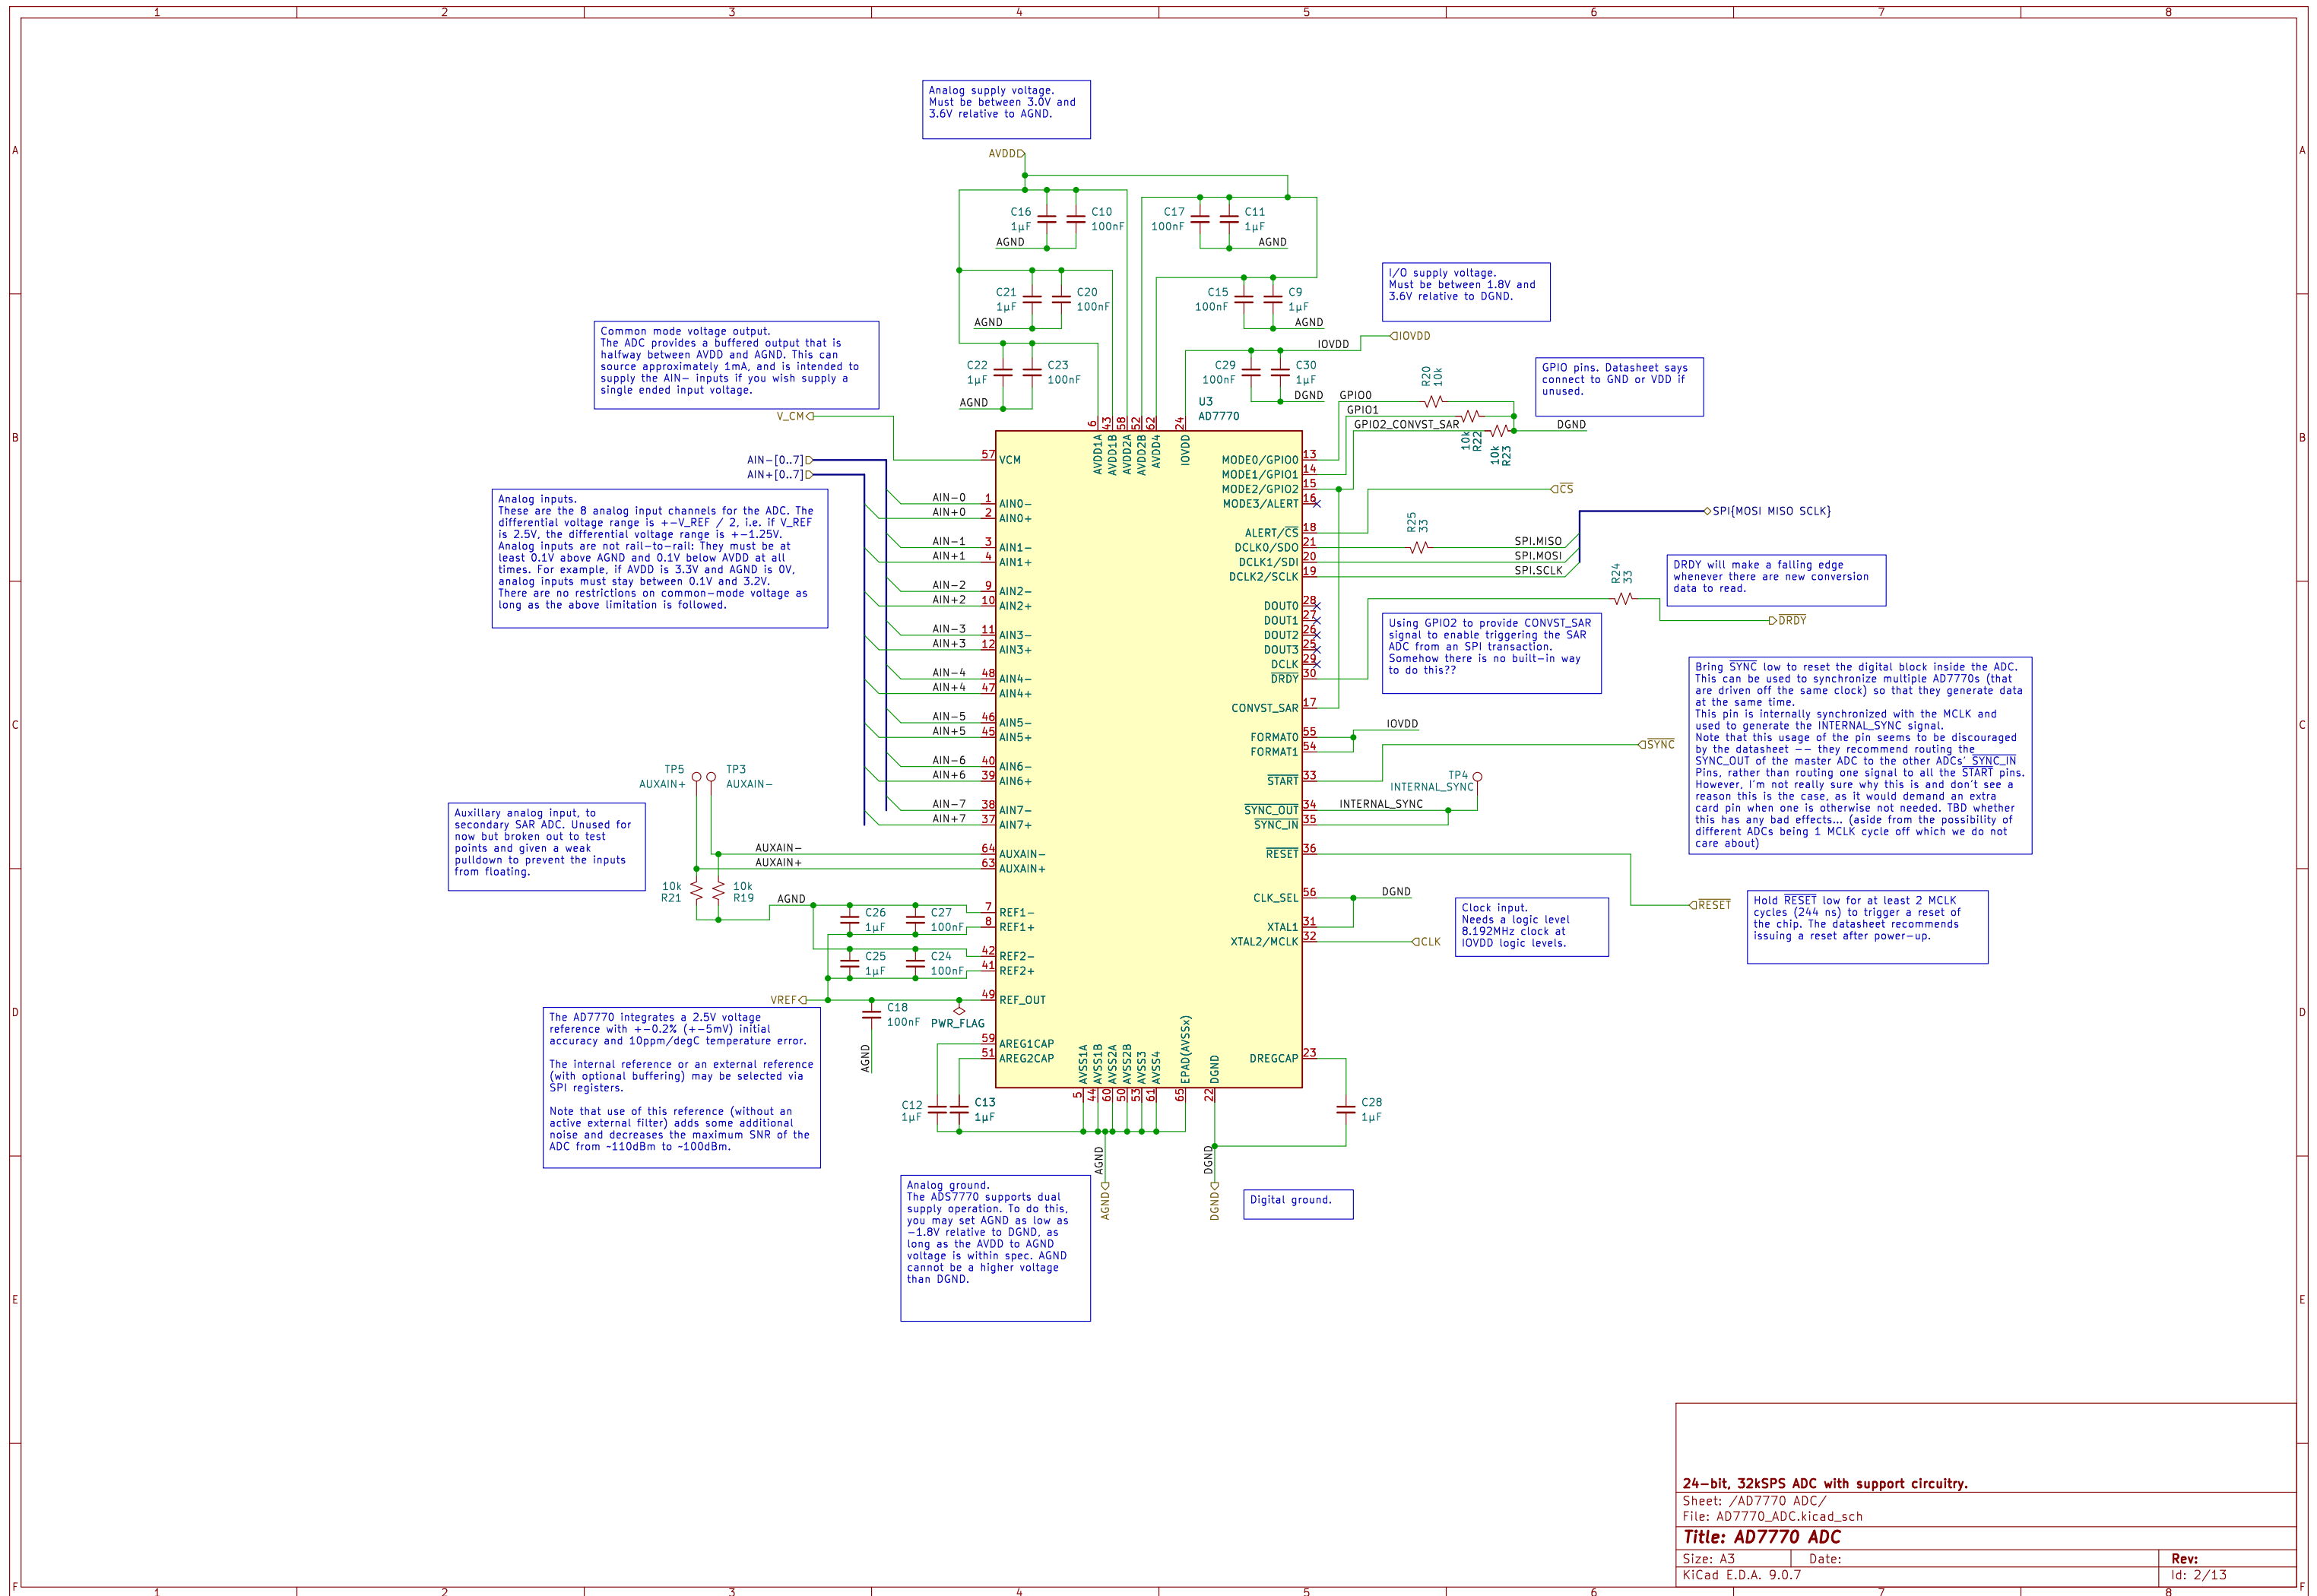

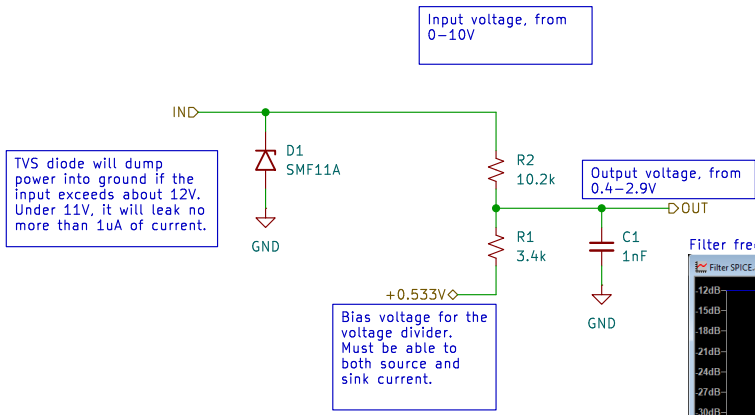

Filter frequency response plotted in LTSpice

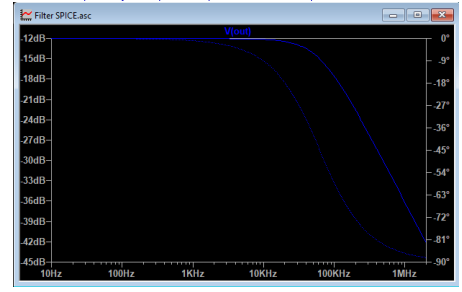


Converts 0–10V signal into the correct range for the ADC


Sheet: /Voltage Signal Conditioning0/
File: VoltageSignalConditioning.kicad_sch

Title: Voltage Signal Conditioning

Size: A5	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 3/13

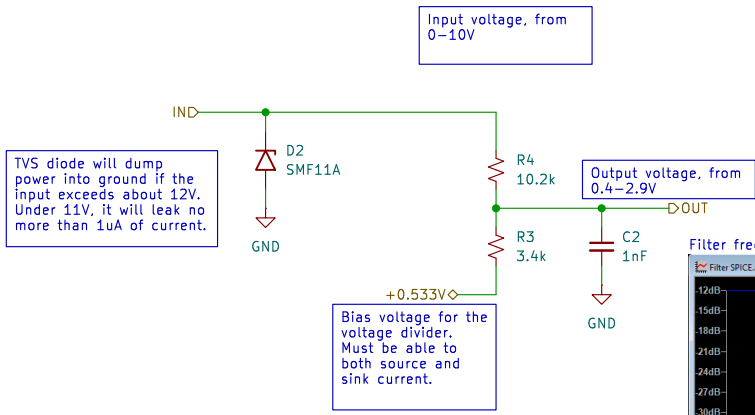

Filter frequency response plotted in LTSpice


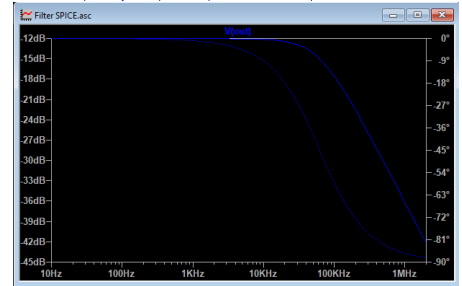


Converts 0–10V signal into the correct range for the ADC

Sheet: /Voltage Signal Conditioning1/
File: VoltageSignalConditioning.kicad_sch

Title: Voltage Signal Conditioning

Size: A5	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 4/13

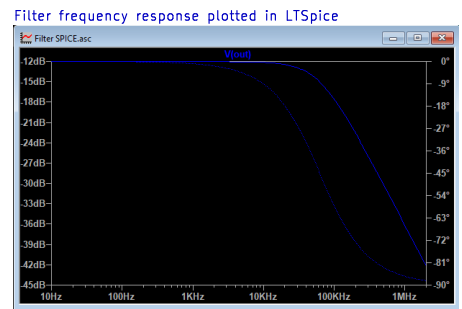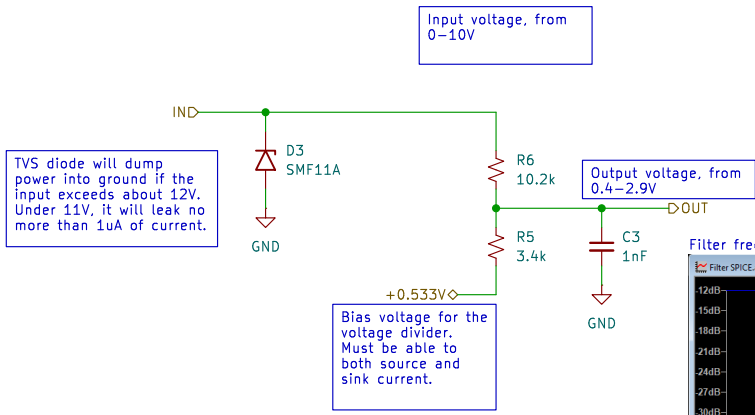


Converts 0–10V signal into the correct range for the ADC


Sheet: /Voltage Signal Conditioning2/
File: VoltageSignalConditioning.kicad_sch

Title: Voltage Signal Conditioning

Size: A5	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 5/13

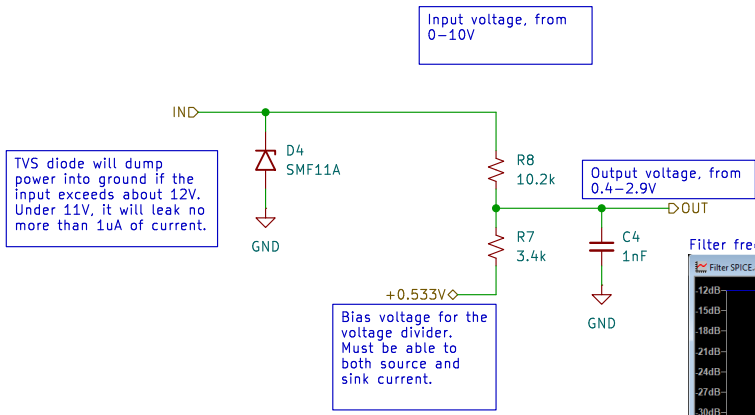

Filter frequency response plotted in LTSpice


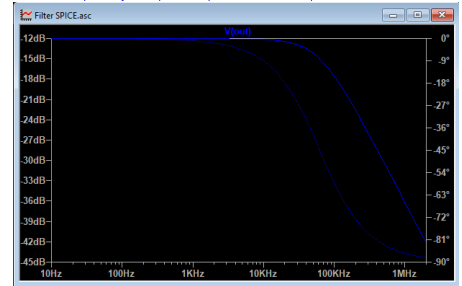


Converts 0–10V signal into the correct range for the ADC

Sheet: /Voltage Signal Conditioning3/
File: VoltageSignalConditioning.kicad_sch

Title: Voltage Signal Conditioning


Size: A5	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 6/13

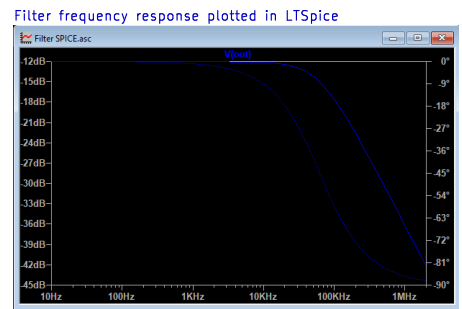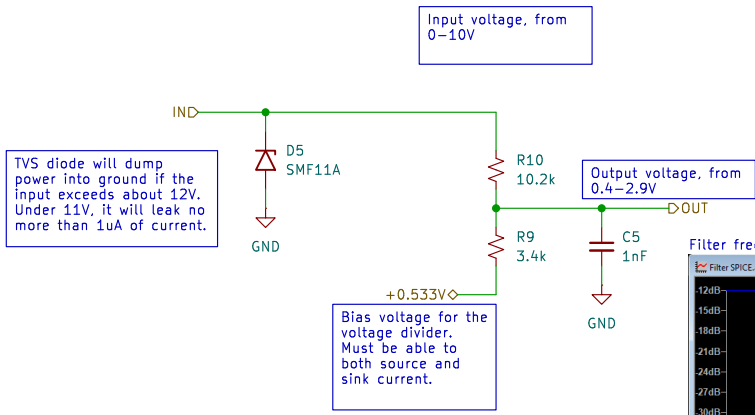


Converts 0–10V signal into the correct range for the ADC

Sheet: /Voltage Signal Conditioning4/
 File: VoltageSignalConditioning.kicad_sch

Title: Voltage Signal Conditioning		
Size: A5	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 7/13

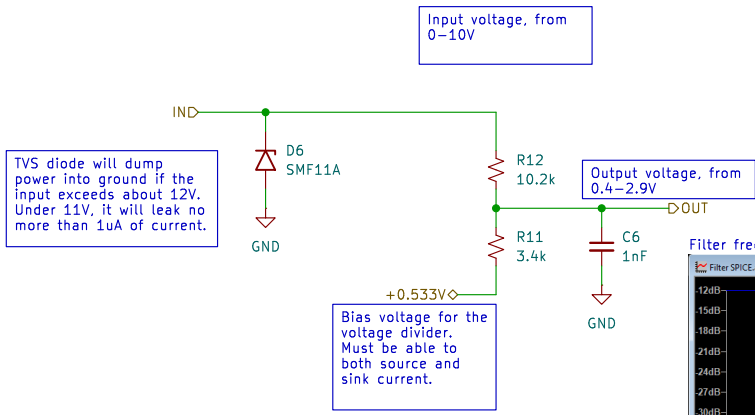

Filter frequency response plotted in LTSpice

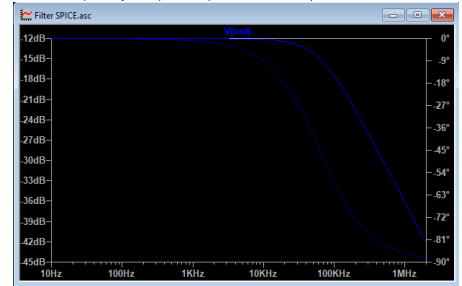


Converts 0–10V signal into the correct range for the ADC

Sheet: /Voltage Signal Conditioning5/
File: VoltageSignalConditioning.kicad_sch

Title: Voltage Signal Conditioning

Size: A5	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 8/13

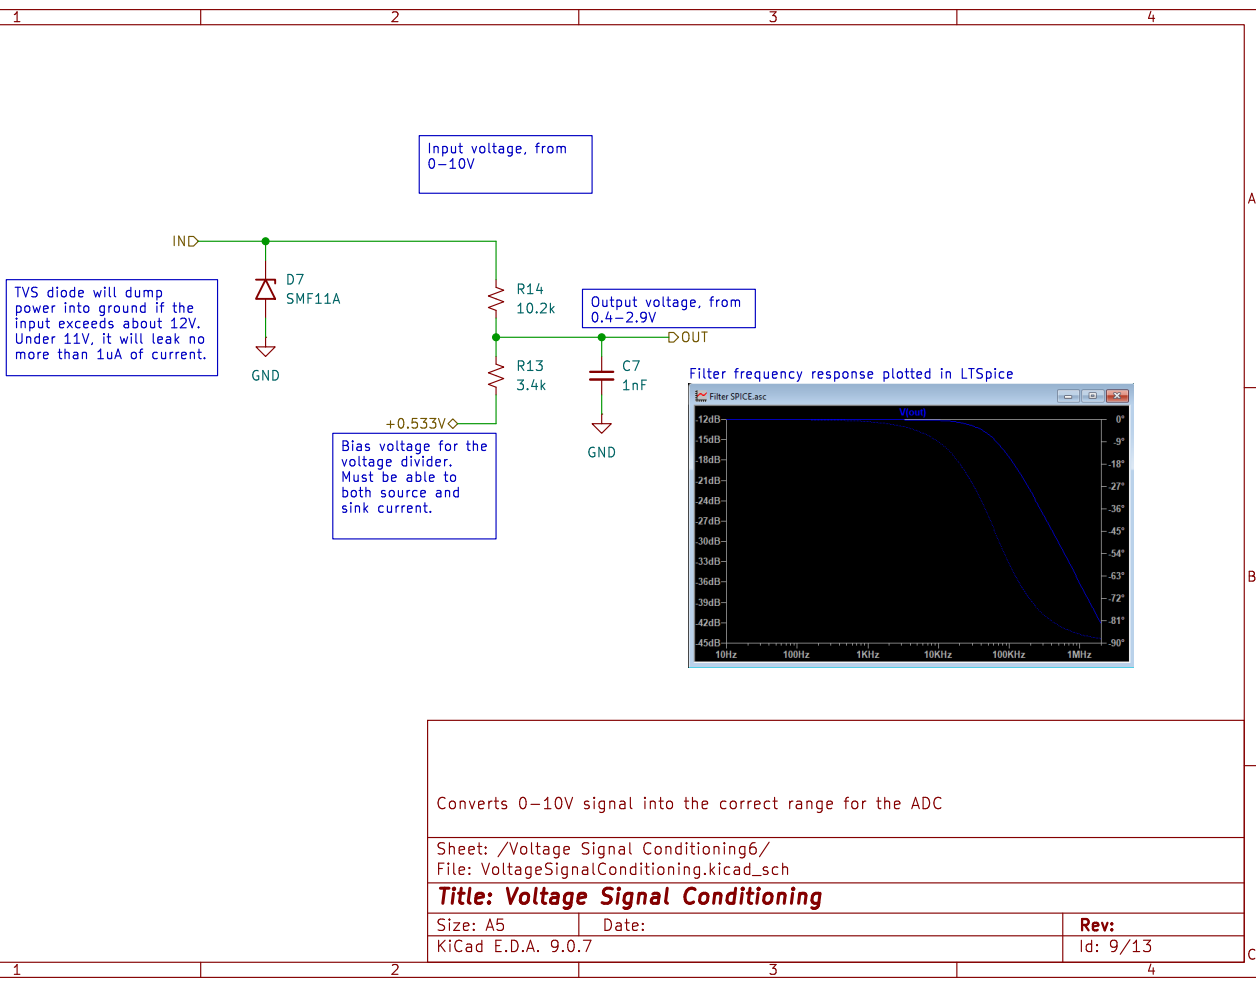


Converts 0–10V signal into the correct range for the ADC


Sheet: /Voltage Signal Conditioning6/
File: VoltageSignalConditioning.kicad_sch

Title: Voltage Signal Conditioning

Size: A5	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 9/13

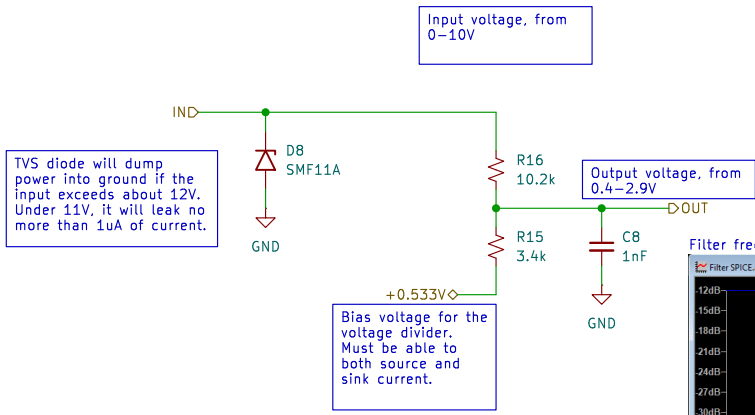

Filter frequency response plotted in LTSpice

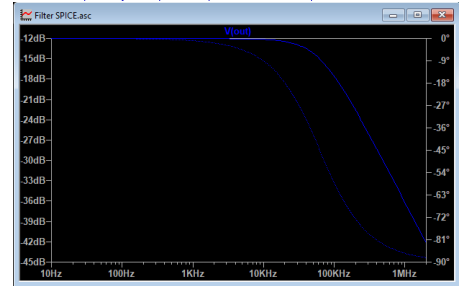


Converts 0–10V signal into the correct range for the ADC

Sheet: /Voltage Signal Conditioning7/
File: VoltageSignalConditioning.kicad_sch

Title: Voltage Signal Conditioning

Size: A5	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 10/13

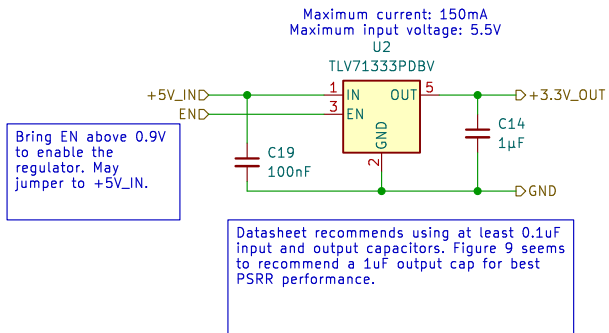

Sheet: /5V To 3.3V LDO/
File: 5V_To_3.3V_LDO.kicad_sch

Title: 5V To 3.3V LDO

Size: A5
KiCad E.D.A. 9.0.7


Date:

Rev:

Id: 11/13

B2B carries the following signals:

- Supply voltage from main board to card
- Digital +5V and +3.3V rails from main board to card
- SPI (MOSI, MISO, SCLK)
- 3x chip selects
- 8.192MHz clock (for AD7770 ADC)
- Sync signal from main board to card
- Data ready signal from card to main board
- Reset line from main board to card

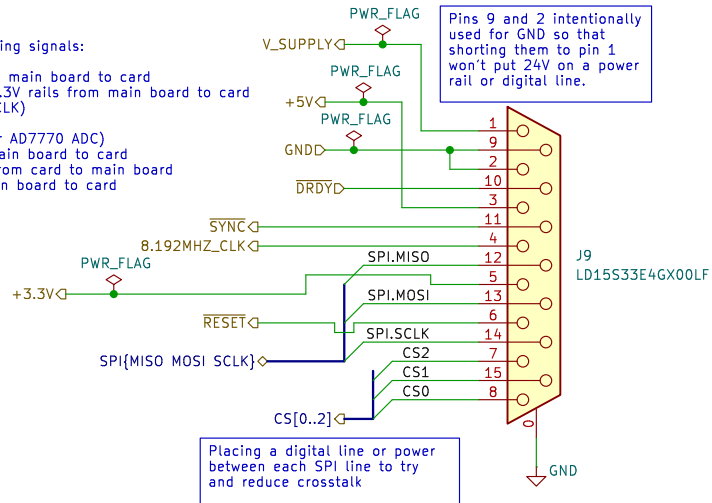

Sheet: /B2B Connector Card Side/

File: B2B Connector Card Side.kicad_sch

Title: B2B Connector Card-Side

Size: A5

Date:


KiCad E.D.A. 9.0.7

Rev:

Id: 12/13

SPI EEPROM

This 4kiB EEPROM stores identity information about the card, plus other card-specific information like calibration coefficients. It allows the main unit to automatically identify and configure cards.

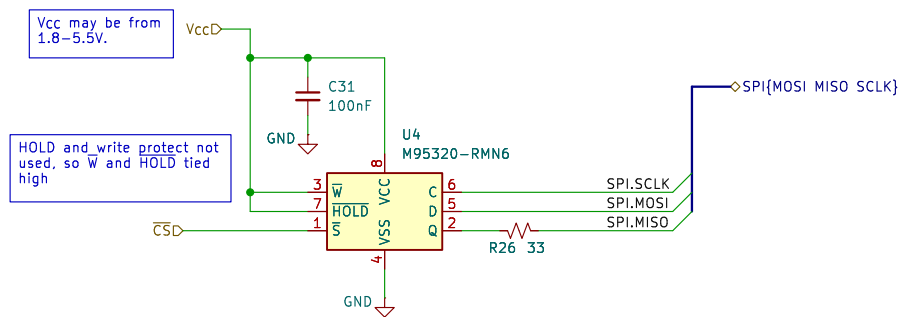

Sheet: /SPI EEPROM/
File: SPI_EEPROM.kicad_sch

Title: SPI EEPROM

Size: A5 Date:
KiCad E.D.A. 9.0.7

Rev:
Id: 13/13