


YS2R6X400E9183544 / VIS, Visibility system / E 32, CUV control unit / CUV1 / L, Lamps / L141, Main beam/dipped beam, right-hand side

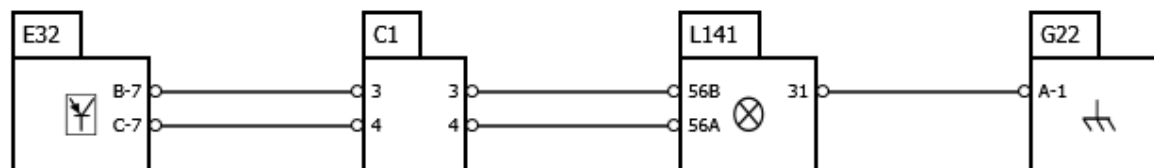

L141, Main beam/dipped beam, right-hand side

## L141, Main beam/dipped beam, right-hand side

Dipped beam and main beam are directly connected to the control unit. If the right-hand main beam stops working, dipped beam comes on as a replacement and the right-hand lamp is adjusted downwards as the control voltage from the left-hand dipped beam is 0 V. This is not a fault.

The maximum load on the control unit output for dipped beam is 7.5 A. The maximum load on the control unit output for main beam is 6 A.

## Dipped beam RH

Indicates that the control unit output is activated.

## Main beam RH

Indicates that the control unit output is activated.