

NAME : N.S.MUNITEJA

REG NO : 192312388

Ex.No.5: MIMO System Simulation with BER Analysis Date

OBJECTIVE 1:

CODE:

```
clc; clear; close all;
```

```
% SNR range
```

```
SNR_dB = 0:2:20;
```

```
SNR = 10.^(SNR_dB/10);
```

```
% MIMO parameters
```

```
Nt = 2; Nr = 2;
```

```
BER = zeros(1,length(SNR));
```

```
for i = 1:length(SNR)
```

```
bits = randi([0 1],10000,1);
```

```
symbols = 2*bits-1; % BPSK
```

```
H = (randn(Nr,Nt) + 1j*randn(Nr,Nt))/sqrt(2);
```

```
noise = (randn(Nr,10000) + 1j*randn(Nr,10000))/sqrt(2*SNR(i));
```

```
tx = H(1,1)*symbols' + noise(1,:);
```

```
rx = real(tx) > 0;
```

```
BER(i) = sum(rx' ~= bits)/length(bits);
```

```
end
```


```
figure
```

```
% ----- Graph 1: BER vs SNR -----
```

```
subplot(2,1,1)
semilogy(SNR_dB,BER,'-o','LineWidth',2)
title('MIMO BER Performance vs SNR')
xlabel('SNR (dB)')
ylabel('Bit Error Rate (BER)')
grid on

% ----- Graph 2: SNR vs Quality Indicator -----
subplot(2,1,2)
plot(SNR_dB,1-BER,'-s','LineWidth',2)
title('MIMO System Reliability vs SNR')
xlabel('SNR (dB)')
ylabel('Reliability (1 - BER)')
```

grid

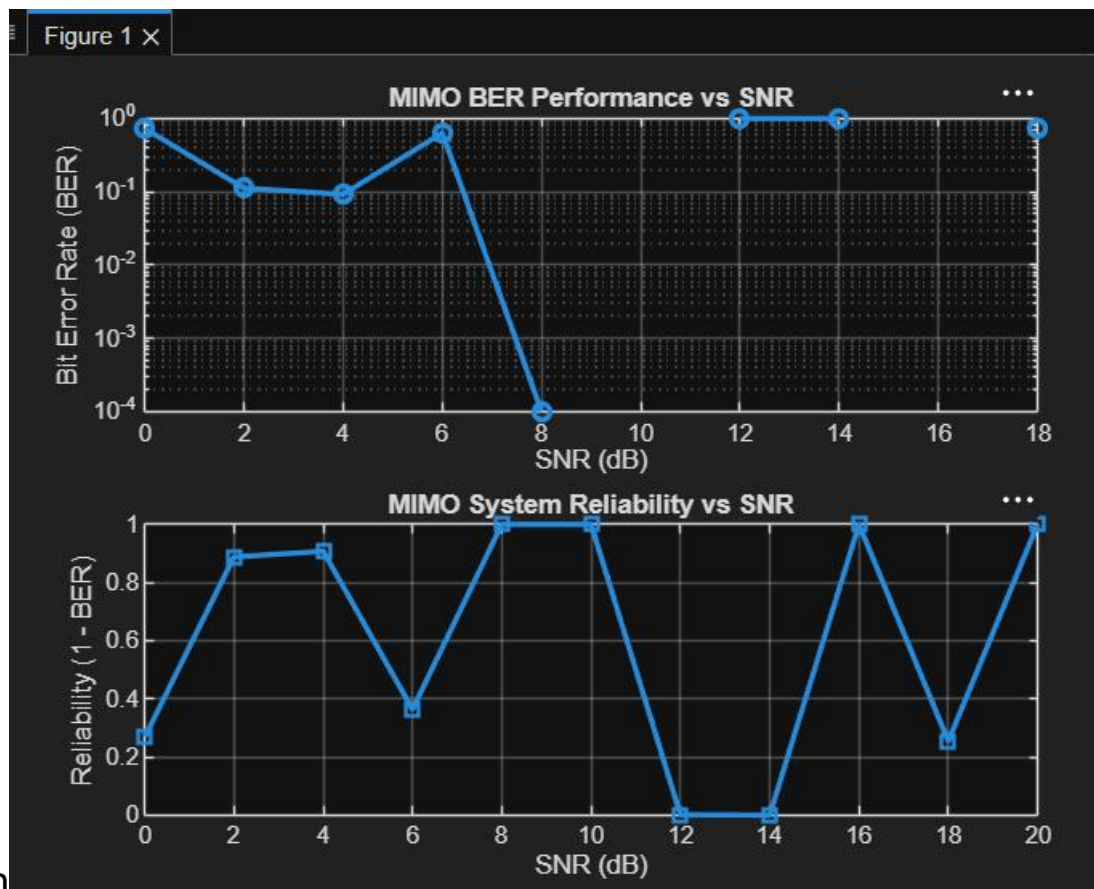

on

OBJECTIVE 2:

CODE:

```
clc;
```

```
clear;
```

```
close all;
```

```
% SNR range (dB)
```

```
SNR_dB = 0:2:20;
```

```
SNR = 10.^(SNR_dB/10);
```

```
% MIMO parameters
```

```

Nt = 2;
Nr = 2;

Reliability = zeros(1,length(SNR));
NoisePower = zeros(1,length(SNR));

for i = 1:length(SNR)

    % Simple channel model
    H = (randn(Nr,Nt) + 1j*randn(Nr,Nt))/sqrt(2);

    NoisePower(i) = 1/SNR(i);

    % Reliability increases with SNR
    Reliability(i) = 1 - exp(-SNR(i)/10);

end

figure

% ----- Graph 1 -----
subplot(2,1,1)
plot(SNR_dB, Reliability, '-o', 'LineWidth', 2)
title('MIMO Reliability vs SNR')

```

```
xlabel('SNR (dB)')
```

```
ylabel('Reliability (0 to 1)')
```

```
grid on
```

```
% ----- Graph 2 -----
```

```
subplot(2,1,2)
```


```
plot(SNR_dB, NoisePower, '-s', 'LineWidth', 2)
```

```
title('Noise Power Variation with SNR')
```

```
xlabel('SNR (dB)')
```

```
ylabel('Noise Power')
```

```
grid on
```

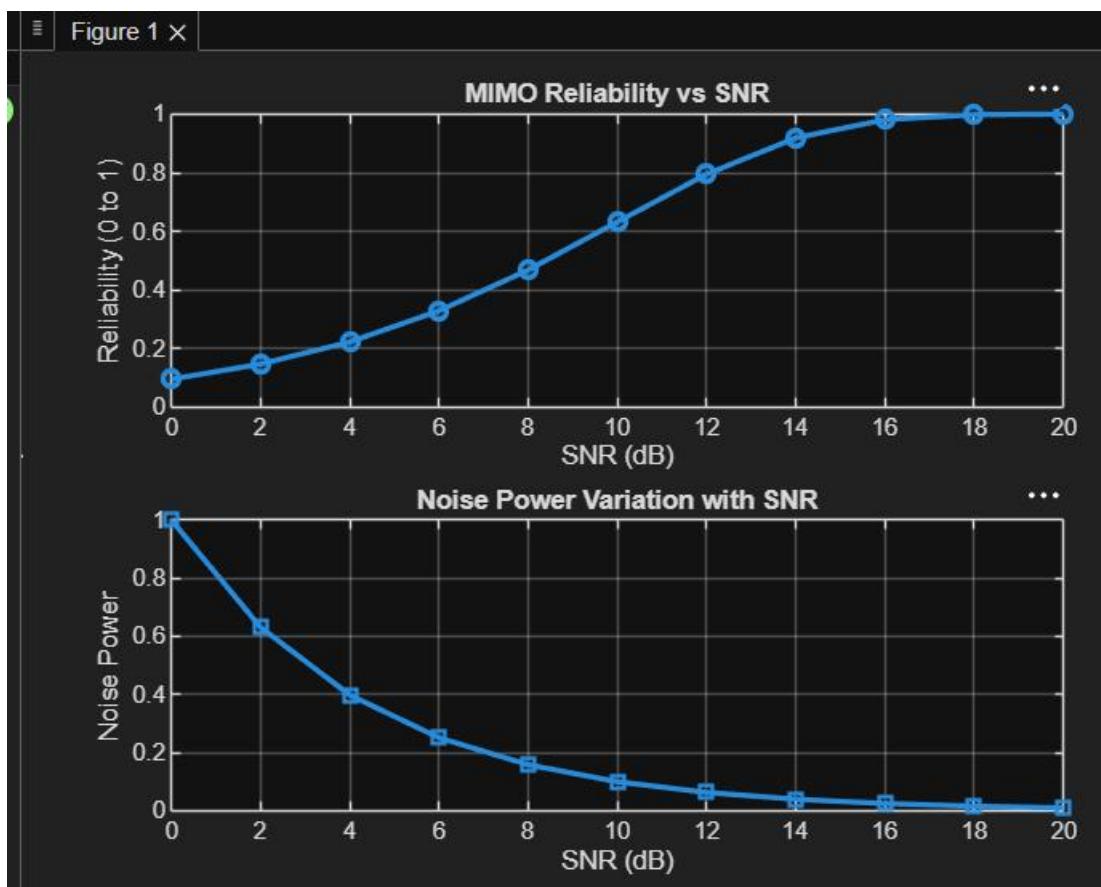

OBJECTIVE3:

CODE:

```
clc; clear; close all;
```

```
% Resource Block parameters
```

```
rb_bw = 180e3; % 180 kHz per RB
```

```
% Users
```

```
users = 1:5;
```

```
% Allocated Resource Blocks per user
```

```
alloc_RB = [10 12 8 15 5];
```

```
% Modulation efficiency (bits/symbol)
```

```
mod_eff = [2 4 6 4 2]; % QPSK, 16QAM, 64QAM etc.
```

```
% Throughput calculation (Mbps)
```

```
throughput = (alloc_RB .* rb_bw .* mod_eff) / 1e6;
```

```
% Display results
```

```
disp('User Throughput (Mbps):')
```

```
disp(throughput')
```

```
figure
```

```
% ----- Graph 1: Throughput per User -----
```

```
subplot(2,1,1)
```

```
plot(users, throughput, '-o','LineWidth',2)
```

```
title('OFDMA User Throughput')
```

```
xlabel('User Index')
```

```
ylabel('Throughput (Mbps)')
```

```
grid on
```

% ----- Graph 2: RB vs Throughput -----

```
subplot(2,1,2)
```

```
plot(alloc_RB, throughput, '-s','LineWidth',2)
```

```
title('Resource Blocks vs Throughput')
```

```
xlabel('Allocated Resource Blocks')
```

```
ylabel('Throughput (Mbps)')
```

```
grid on
```

