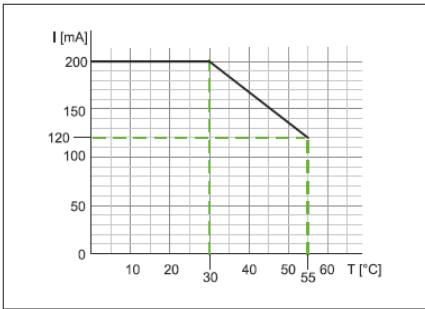


5.23.2 Electrical Data


Device supply

Parameter	Conditions	Value
Operating voltage	EN 61131-2	24 V DC $\pm 25\%$ (SELV)
Current consumption	with / without input and output at operating voltage	≤ 50 mA

Sensor supply

Parameter	Conditions	Value
Sensor power supply operating voltage		24 V DC
Sensor power supply total current		≤ 4 A
Power supply	Per port, see derating 	≤ 0.2 A

Actuator supply

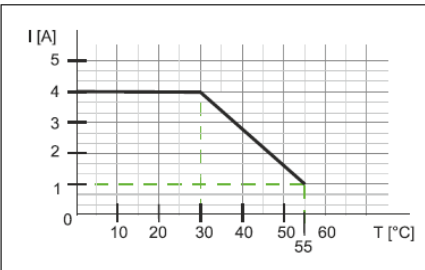Parameter	Conditions	Value
Actuator supply operating voltage		24 V DC $\pm 25\%$ (SELV)
Actuator supply total current	See derating 	≤ 4 A
Actuator supply	Per pin	≤ 0.5 A

Bus data

Parameter	Conditions	Value
Addressing		Automatic
Transfer protocol		Internal ICAN system
Transfer rate		1 MBaud

Input

Parameter	Conditions	Value
Input characteristic	EN 61131-2	Type 3
Rated voltage		24 V DC
Rated current	@24 V DC	3.5 mA
Input delay		2 ... 5 ms

Output

Parameter	Bedingungen	Wert
Output current	Per channel	0.5 A
Switching frequency - resistive load		≤100 Hz

Environmental characteristics

Parameter	Conditions	Value
Storage temperature		-25 °C ... +70 °C
Operating temperature		0 °C ... +55 °C

Electrical safety

Parameter	Conditions	Value
Degree of protection		IP67

EMC-interference

Parameter	Conditions	Value
Radio interference field strength		QP 40 dB μ V/m (30 ... 230 MHz) QP 47 dB μ V/m (230 ... 1000 MHz)

EMC-immunity

Parameter	Conditions	Value
Electrostatic discharge housing	EN 61000-4-2	Contact ± 4 kV; air ± 8 kV
High-frequency electrical RF fields housing	EN 61000-4-3 RF field & GSM	10 V/m
Fast transients / burst DC inputs/outputs	EN 61000-4-4	± 2 kV I/O supply / ± 1 kV data cable / ± 1 kV I/O cable
Magnetic field	EN 61000-4-8 (50 Hz)	30 A/m
Conducted interferences, high-frequency fields	asymmetrical	10 V

Device protection

Parameter	Conditions	Value
Reverse polarity protection		Yes
Sensor supply short-circuit protection	Automatic start with load up to 100 mA, reset is required above 100 mA load	

Montagedaten

Parameter	Conditions	Value
Weight		173 g