4.6.2.40 Connection overview Cube67+ DIO16 IOL8 A/B E 8xM12 Art.-No. 56768

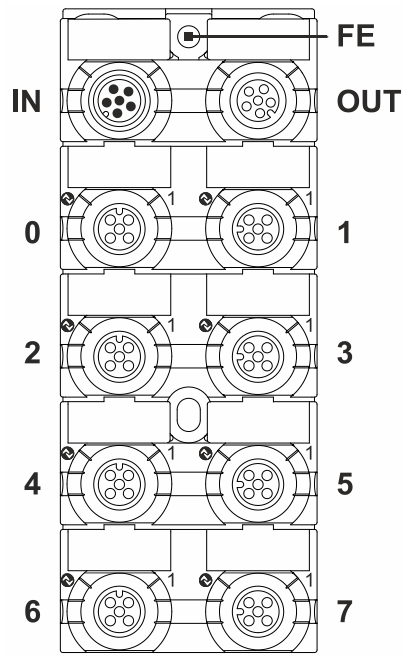

FE	Functional ground connection
IN	System bus input port, M12 male connector A-coded, 6-pin
OUT	System bus output port, M12 female connector A-coded, 6-pin
0 … 7	Mulitifunctional port, M12 female connector A-coded, 5-pin ▪ Sensor supply ▪ Actuator supply (AUX) ▪ Digital inputs (DI) ▪ Digital outputs (DO) ▪ IO-Link class A/B
IO-Link	Channel corresponds to pin 4
1	Channel corresponds to pin 2

Fig. 68: Connection overview Cube67+ DIO16 IOL8 A/B E 8xM12 - Art.-No. 56768

Pin-assignment

System bus input port
M12 male connector A-coded

IN (BUS)		
	Pin 1	24 V ⎓ UA/4 A
	Pin 2	24 V ⎓ US/4 A
	Pin 3	0 V
	Pin 4	BUS
	Pin 5	BUS
	Pin 6	0 V

System bus output port
M12 female connector A-coded

OUT (BUS)		
	Pin 1	24 V ⎓ UA/4 A
	Pin 2	24 V ⎓ US/4 A
	Pin 3	0 V
	Pin 4	BUS
	Pin 5	BUS
	Pin 6	0 V

Mulitifunctional port
M12 female connector A-coded

0 … 7		
	Pin 1	Sensor Supply 24 V ⎓
	Pin 2	DI/DO/AUX
	Pin 3	0 V
	Pin 4	DI/DO/IO-Link
	Pin 5	0 V