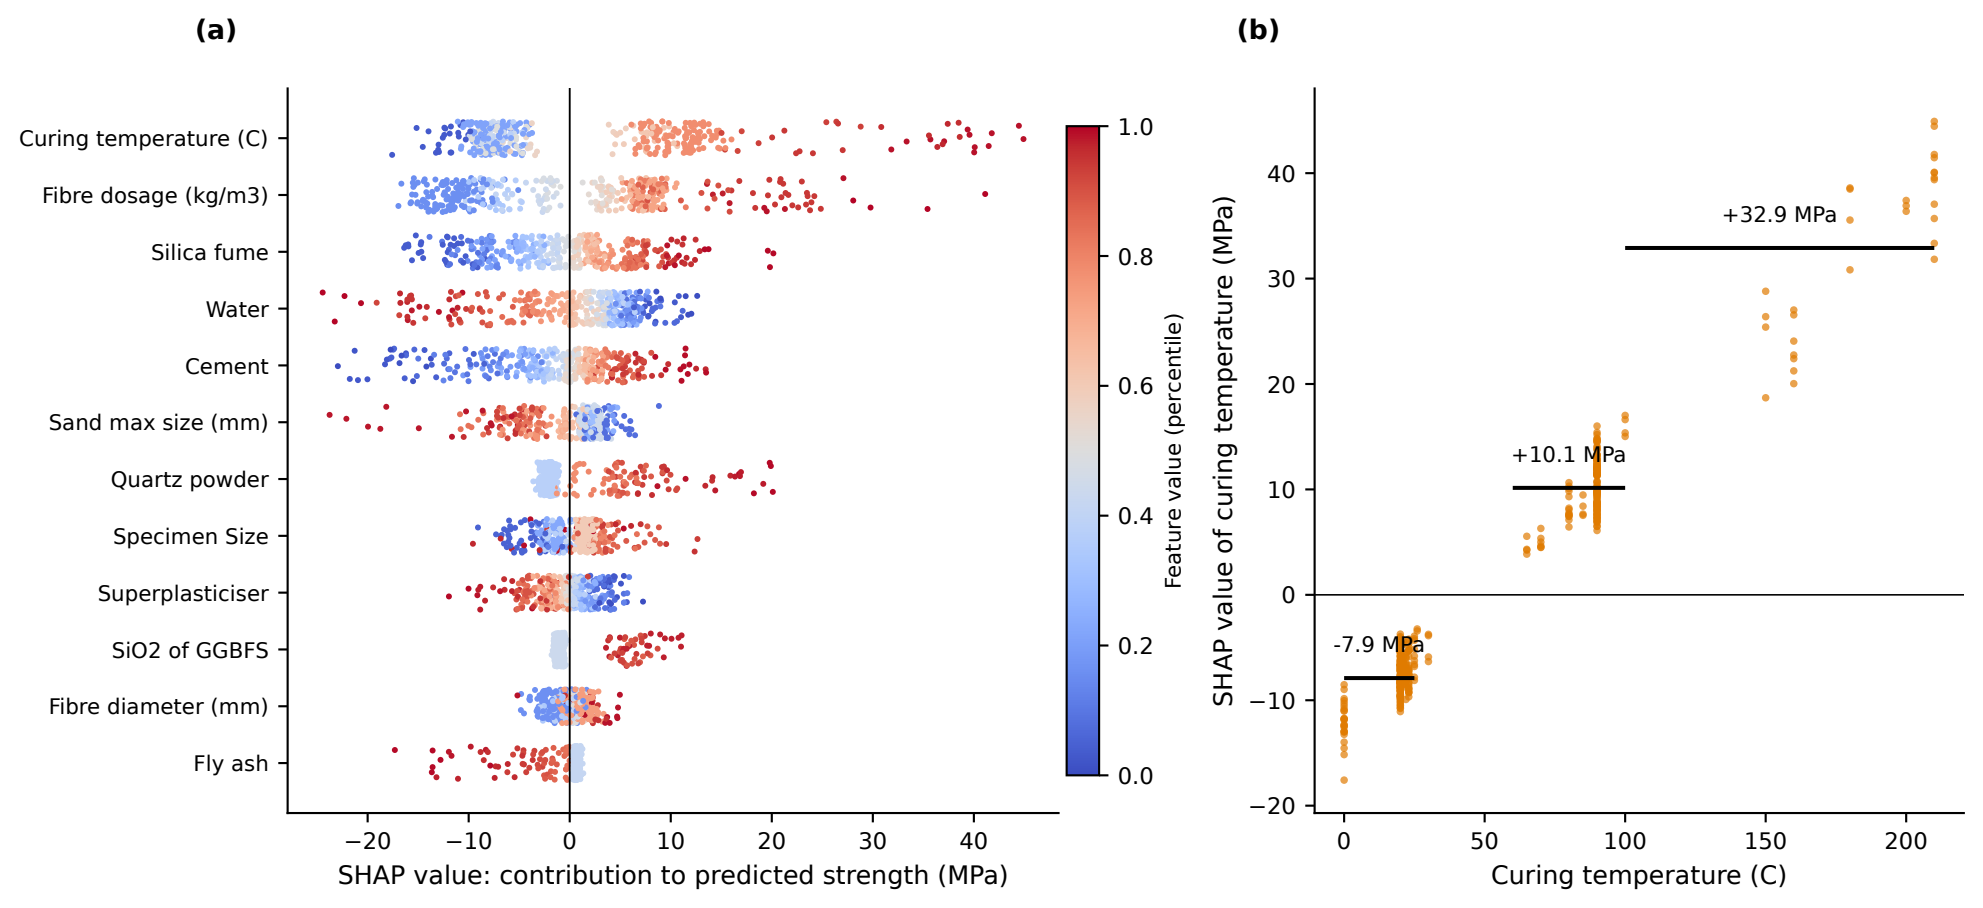

(a)
Curing temperature (C)
Fibre dosage (kg/m3)
Silica fume
Water
Cement
Sand max size (mm)
Quartz powder
Specimen Size
Superplasticiser
SiO2 of GGBFS
Fibre diameter (mm)
Fly ash
−20
−10
0
10
20
30
40
SHAP value: contribution to predicted strength (MPa)
1.0
0.8
0.6
0.4
0.2
0.0
Feature value (percentile)
(b)
SHAP value of curing temperature (MPa)
+32.9 MPa
+10.1 MPa
-7.9 MPa
40
30
20
10
0
−10
−20
0
50
100
150
200
Curing temperature (C)