


Diagram illustrating the connection of the ST75280 module to a 5V USB supply. The module pins are connected as follows:

- Pin 1 (UCC) is connected to 5V_USB.
- Pin 2 (D-) is connected to USB-.
- Pin 3 (D+) is connected to USB+.
- Pin 5 (GND) is connected to GND.
- Pin 6 (SHLD) is connected to GND.
- Pin 7 is connected to USB_EN.

A 100nF capacitor (C1) is connected between pins 1 and 2. A 1k8 resistor is connected between pins 6 and 7. The module pins are labeled: ST_IRQ, DIR, TM, BUTT, ST_CS, ST_SCK, and ST_MISO.

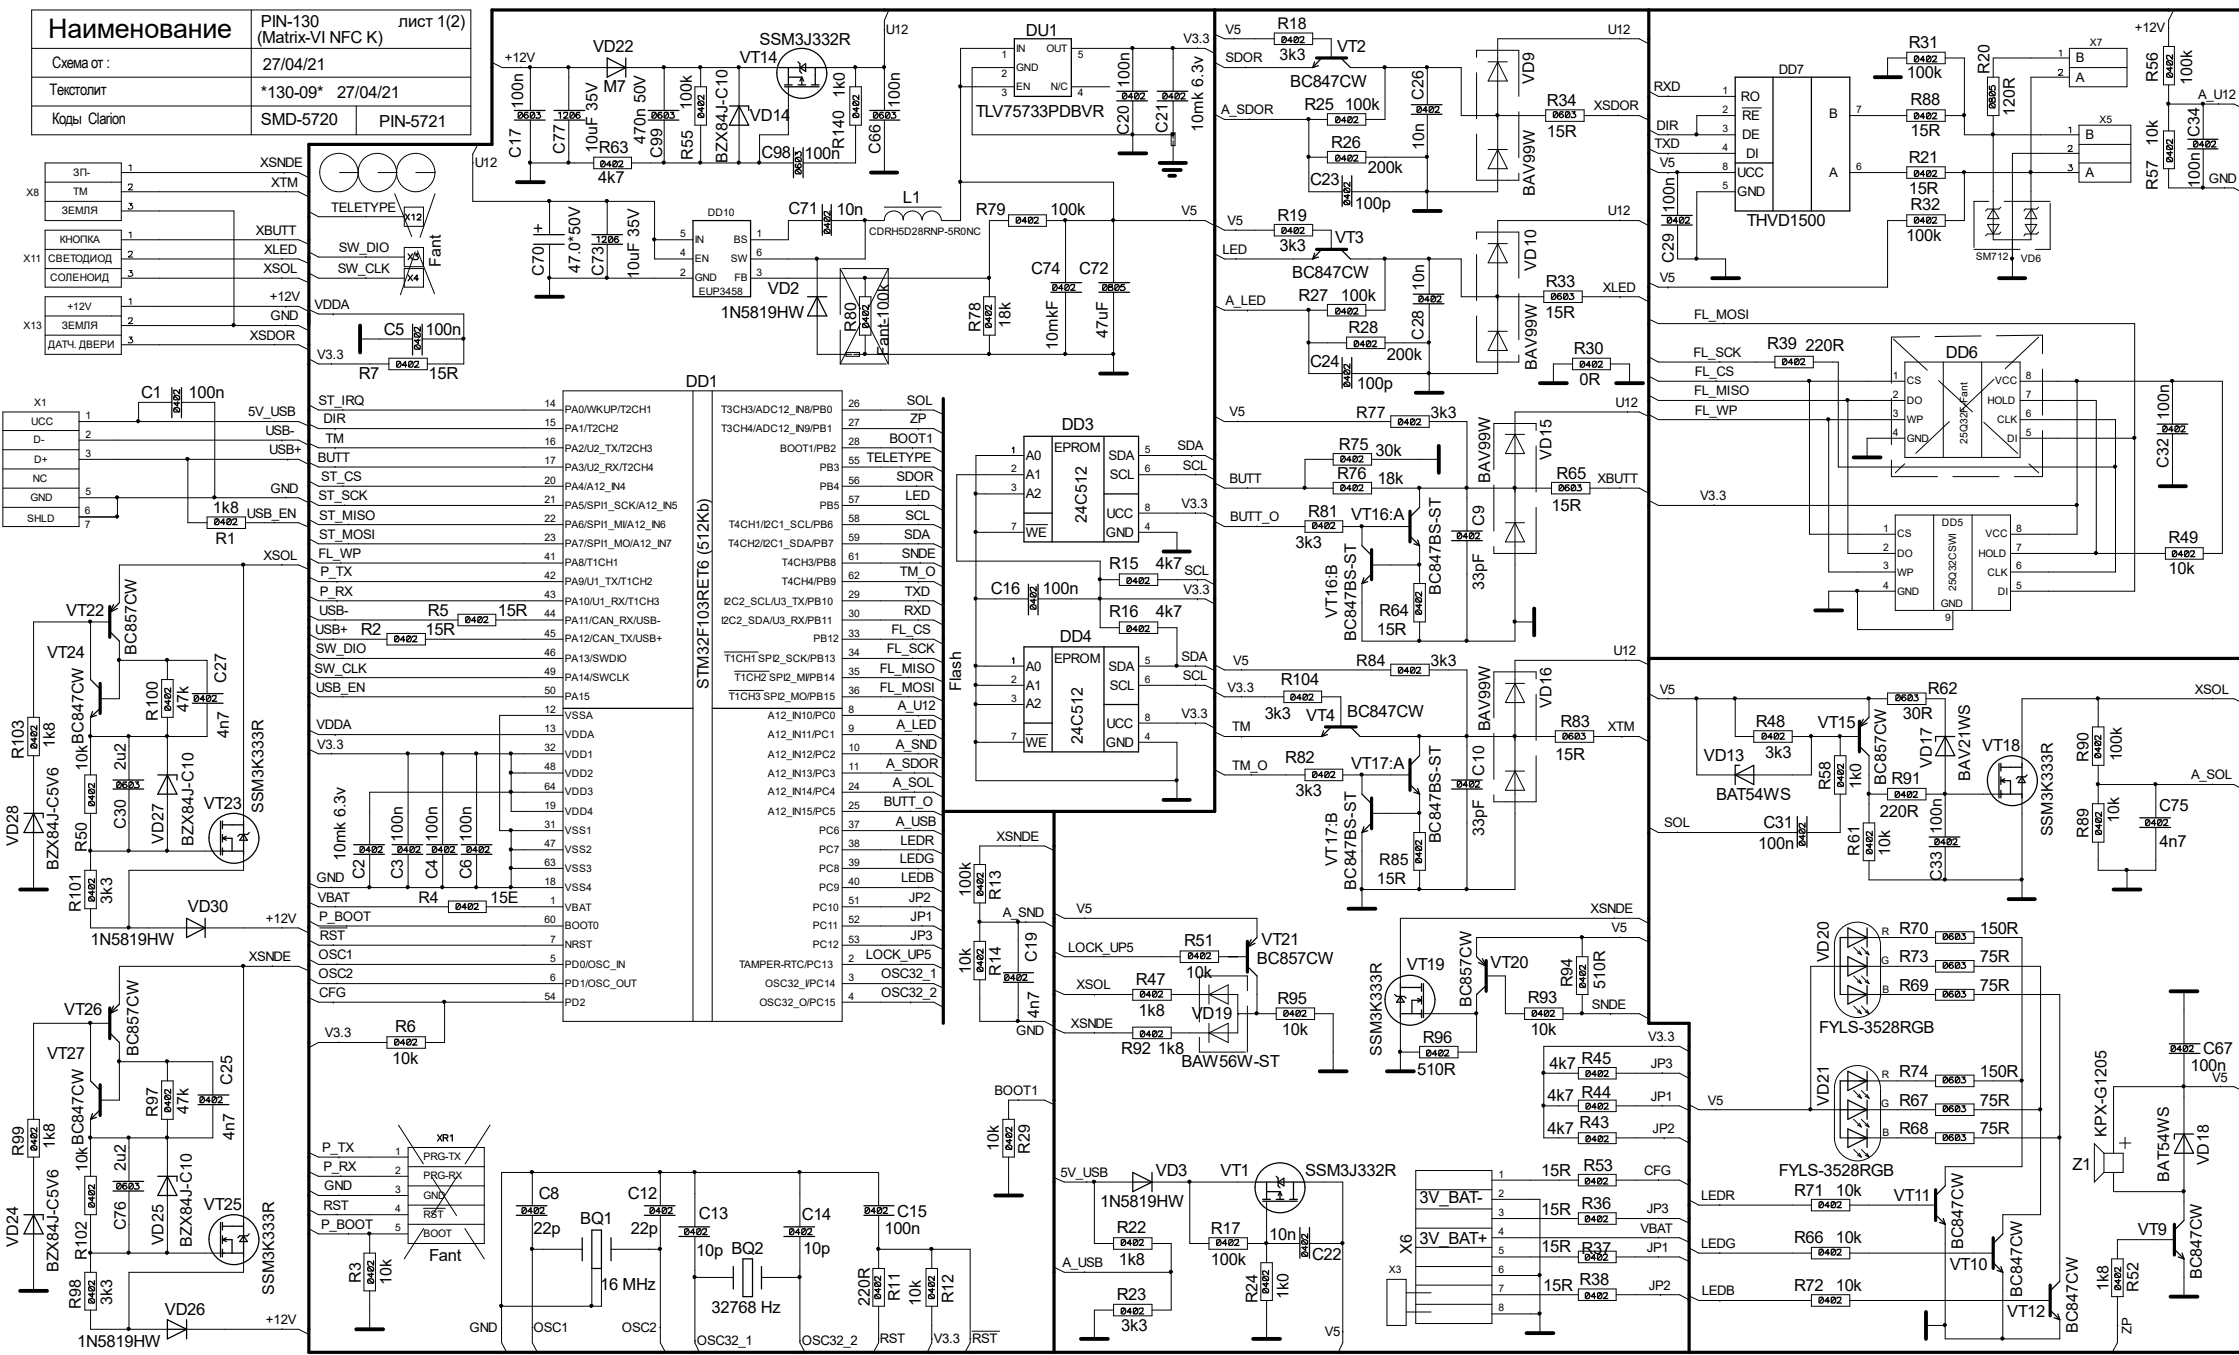

Наименование	PIN-130 (Matrix-VI NFC K) ЛИСТ 2(2)	
Схема от :	27/04/21	
Текстолит	*130-09* 27/04/21	
Коды Clarion	SMD-5720	PIN-5721

