# Finished pack – 3D views

Rendered from the print file itself, so what you see here is what will be printed. 95 W × 95 H × 20 D mm; the hang tab takes the back to 115 mm.



### Front, three-quarter




### Front, other flank




### Front, square on




### Back, three-quarter




### Back with hang tab, square on




### From above: top closure




The tab is a single ply of board, so from the front its unprinted reverse shows above the carton (left and top views). Printing that reverse is optional; see sheet 6.

# Panel views at 1:1 with finished dimensions

Print this sheet at 100% (no 'fit to page') and every panel measures true. All dimensions in mm, outside of carton.







Type is held to a 1.2 mm minimum x-height throughout (EU 1169/2011 for packs over 80 cm²). The smallest copy on the pack is 6.6 pt Plus Jakarta Sans.

# Dieline at 1:1 – straight tuck end with euro hang tab

Viewed from the printed side. Magenta = cut, cyan dashed = crease. Print at 100% to check against the die.



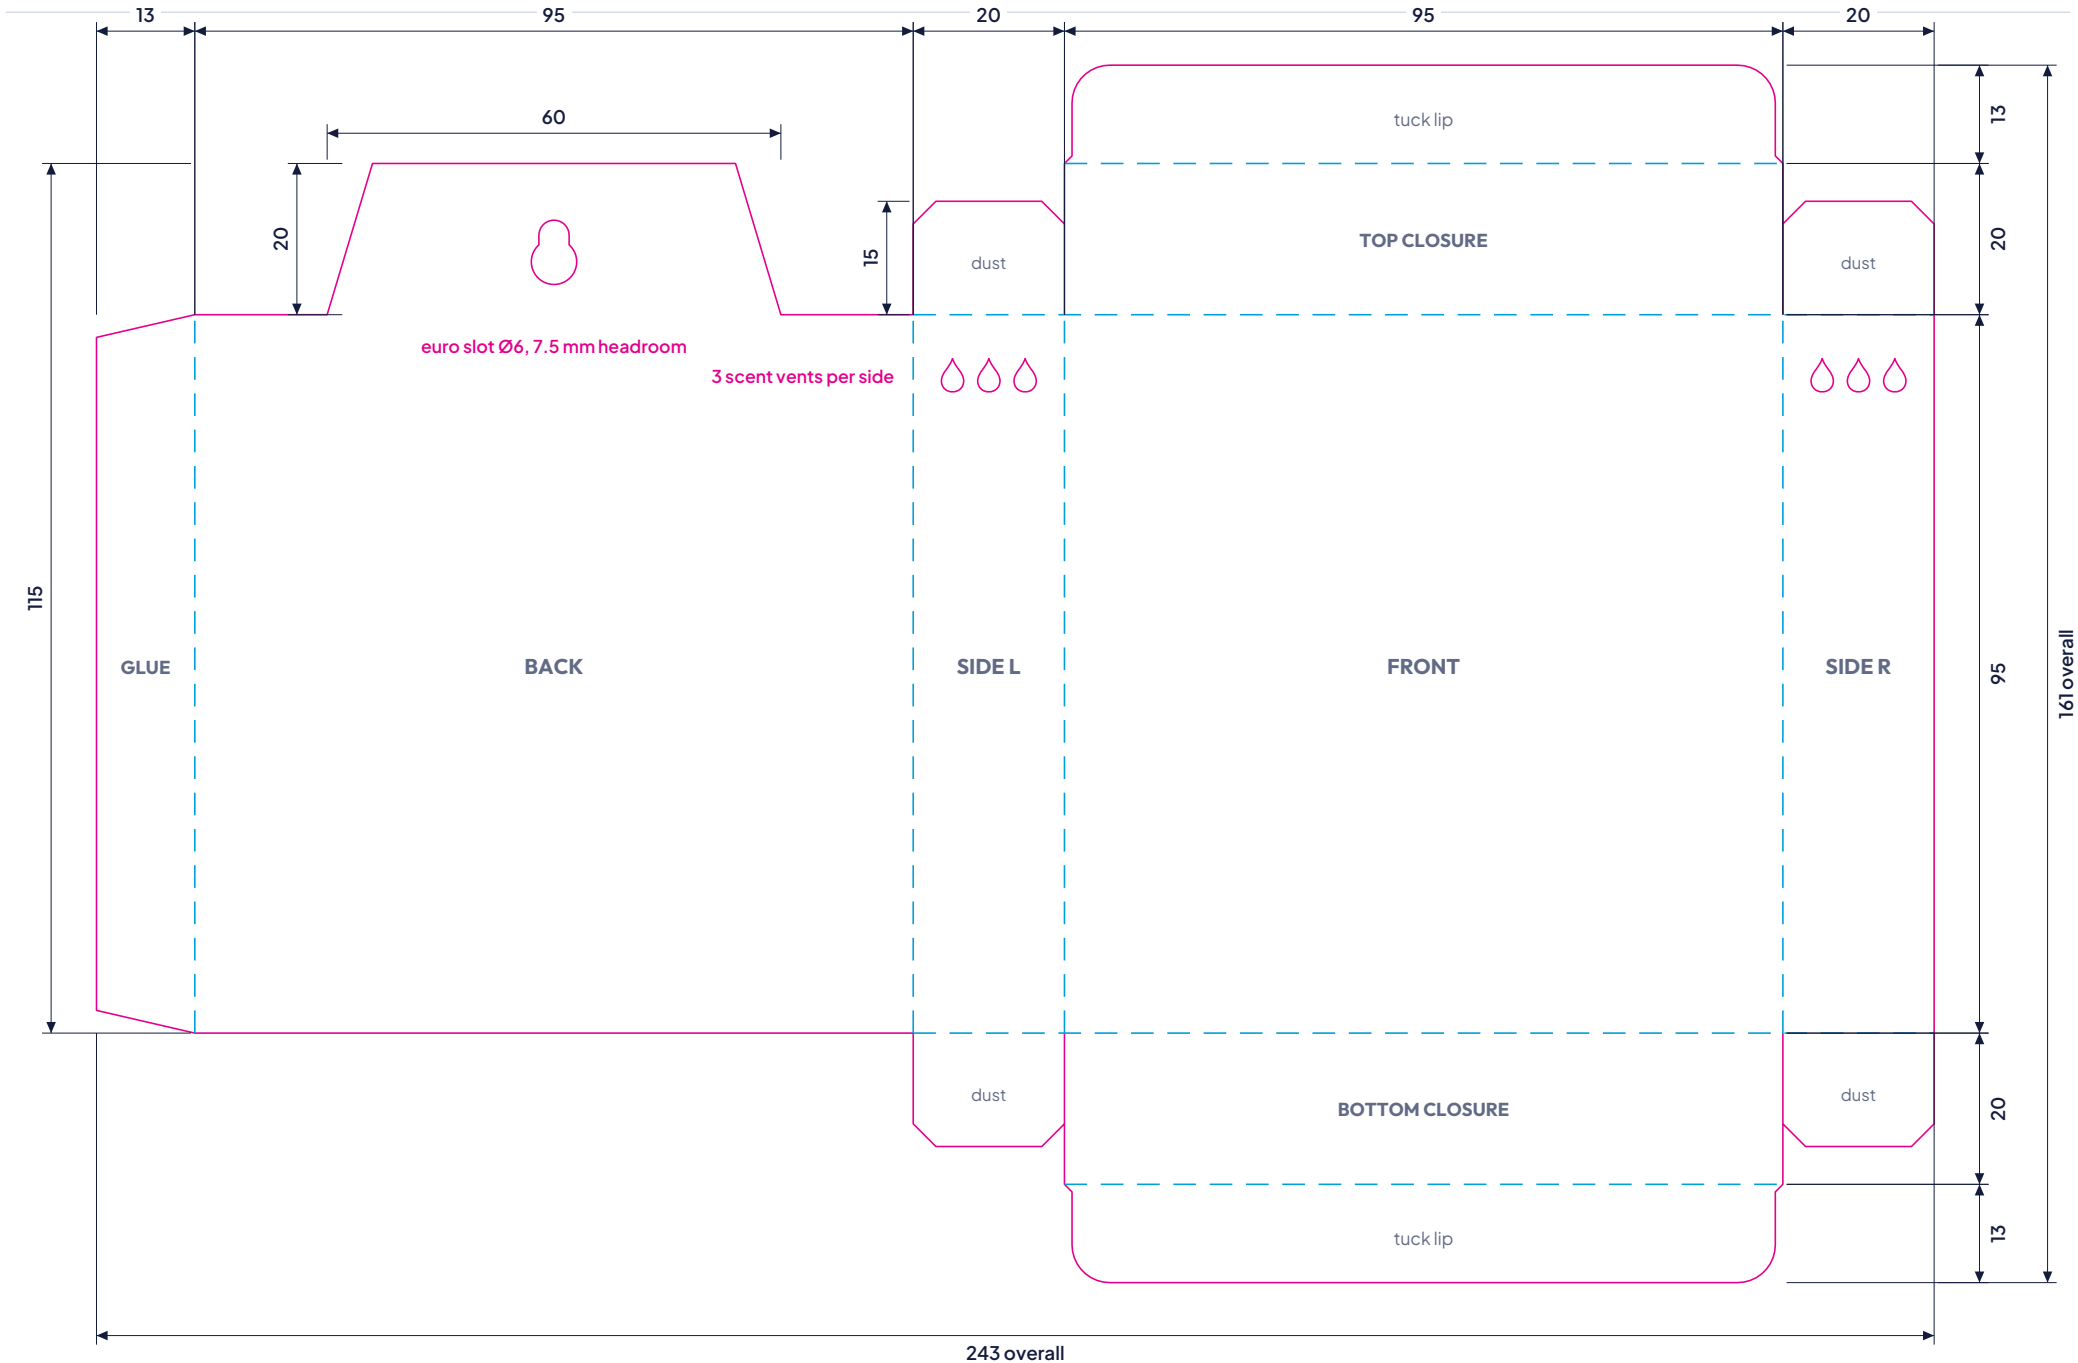


CUT — — · CREASE

Lip corners R5, 1 mm shoulders. Glue flap tapers 3 mm. No crease at the tab base, so the peg hole cannot tear the tab off.

# Artwork on the die – panel map

Page 1 of the print file with the die laid over it, 1:1. The artwork carries 3 mm bleed past every cut.



GLUE | BACK | SIDE L | FRONT | SIDE R





Glue flap is left unprinted and unvarnished. Tuck lips and dust flaps are flat ink; they are hidden once closed.

# Folding and filling instructions

Eight steps from flat blank to hanging pack. Blank shown printed side DOWN in steps 1-3.




## 1 Pre-break the creases

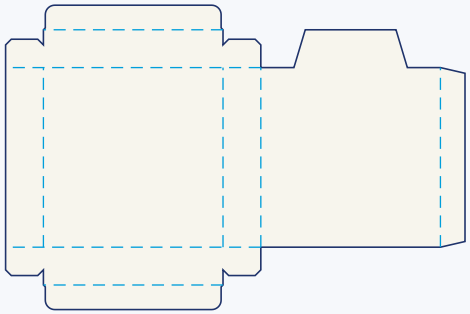


Lay the blank printed side down. Fold every crease 180° and back so the board folds cleanly.

## 2 Glue the side seam

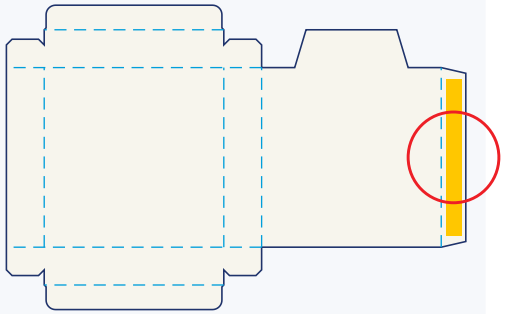


Apply glue to the narrow glue flap (yellow), on its unprinted face, 2-3 mm in from each edge.

## 3 Fold and press

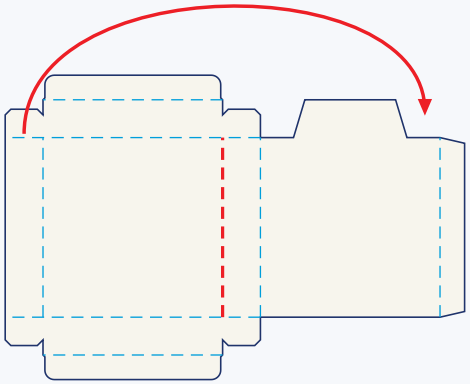


Fold on the red crease so the right side panel lands on the glue flap. Press flat and let it set.

## 4 Open the sleeve

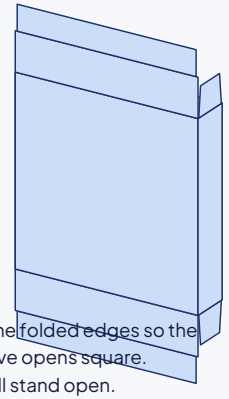


Squeeze the folded edges so the glued sleeve opens square. All flaps still stand open.

## 5 Close the bottom




Fold both bottom dust flaps in, then the bottom closure. Tuck the lip in behind the back panel.

## 6 Load four blocks

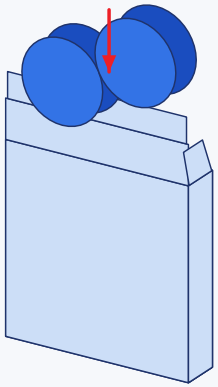


Stand the four 50 g blocks on edge, two by two, wrappers on. Pack holds 4 × 50 g = 200 g.

## 7 Close the top



Fold the top dust flaps in, then the top closure. Tuck the lip in behind the back panel and tab.

## 8 Hang or stand



Finished: 95 × 95 × 20 mm. Hang from the euro slot on a peg, or stand it on a shelf.

Diagram colours: blue = printed outside, cream = unprinted inside of the board, yellow = glue, red = the fold or move in that step.

# Specification and pre-press checks



For the printer / converter. Everything below was measured from the build, not estimated.



| | |
|---|---|
| **Product** | Swift Blue-Drop flush-activated WC cleaner, 4 × 50 g blocks, net 200 g |
| **Carton style** | Straight tuck end (STE); both tucks hinge from the front; euro hang tab on the back |
| **Finished size** | 95 W × 95 H × 20 D mm (outside). Back panel with tab 95 × 115 mm |
| **Flat blank** | 243 × 161 mm; artwork page 249 × 167 mm including 3 mm bleed |
| **Flaps** | Closures 20 mm + 13 mm tuck lip (R5 corners), dust flaps 15 mm, glue flap 13 mm |
| **Hang tab** | 60 × 20 mm, 6 mm shoulder chamfers, euro slot Ø6 mm eye + 4 mm riser, 7.5 mm board above the slot |
| **Scent vents** | 3 droplet cut-outs per side panel, 4.4 mm tall, 8 mm below the top crease |
| **Board** | Recommended 300-350 g/m² folding boxboard (GC1/GC2), white reverse |
| **Colour** | CMYK process. Vector type and graphics in CMYK; the water photograph is an RGB image at 305 dpi - convert with the printer's own CMYK profile |
| **Fonts** | Outfit and Plus Jakarta Sans (SIL Open Font Licence), embedded |
| **Print file** | Swift_Blue-Drop_95x95x20_FINAL_PRINT.pdf - p1 artwork, p2 die (spot colours CutContour / Crease), in register |

## Pre-press checks (from the build)

| | |
|---|---|
| ● **Overlapping elements** | 0 found across 78 registered elements (text, logos, seal, icons, QR, product, vents) |
| ● **Safe area** | 0 breaches (4 mm front/back, 3 mm sides/closures) |
| ● **Type size** | smallest x-height 1.25 mm, minimum 1.20 mm; 0 strings under |
| ● **Badge containment** | 0 strings outside their seal/flag/pill |
| ● **Page size** | 249.0 × 167.0 mm = blank + 2 × 3 mm bleed |
| ● **Fonts** | 7 embedded subsets: Outfit-Black, Outfit-Bold, Outfit-ExtraBold, Outfit-SemiBold, PlusJakartaSans-Bo |
| ● **Hang tab** | 7.5 mm board above slot (min 6) |
| ● **Tuck closure** | closure 20 mm = carton depth 20 mm, lip 13 mm |

## Notes

Dimensions are the finished outside sizes supplied. The converter should apply its usual board-caliper allowance when cutting the die.

The hang tab is single ply. Its reverse is bare board and shows from the front above the carton; it can be printed navy as a second-side job if wanted.

Claim wording: front seal reads ONE BLOCK · 300 FLUSHES; back copy reads 'Each block lasts up to 300 flushes'. Confirm against product testing before plates.

Contact details are unchanged: 0739 446 655 · info@vistexchemicals.co.ke · P.O. Box 218 – 00606, Industrial Area, Nairobi.