

Your quotation

Date: 10.07.23
Quote ref: 239268GH

Profile specification

Profile	Entre
Profile Thickness	65mm
U-Value	0,90 W/m²K
Glazing	59mm triple glazed
Panel Thickness	65mm
Water tightness	Class 5A
Wind load resistance	Class C2
Air permeability	Class 4
Sound insulation	42dB



Features & benefits


- ✓ German 65mm deep insulated frame with mechanical & glued corners for high performance construction and life expectancy
- ✓ Marine grade powder coat finish as standard suitable for all locations
- ✓ Laminated triple glazing as standard for maximum security
- ✓ Extensive choice of external and internal colours giving maximum design choice
- ✓ Low level threshold as standard for disability access compliance
- ✓ Triple gasket sealing system for high weather performance
- ✓ Hidden fixing system with cover trims to frame & door sash for minimal maintenance and clean look appearance
- ✓ 316 Grade Stainless steel handles & fittings suitable for all locations
- ✓ Sidelights and fanlights in single frame construction offering minimal frame design
- ✓ Optional custom design or glass etching for individual design
- ✓ Available with motorised locking for use with finger scan locking systems and home smart properties
- ✓ Secure By Design and PAS 24 Certified for full new build compliance
- ✓ Optional 25mm high projecting cills for ease of installation

Your quotation

Date: 10.07.23
Quote ref: 239268GH

Profile specification

Profile	Pivot
Profile Thickness	75mm
U-Value	0,72 W/m²K
Glazing	69mm triple glazed
Panel Thickness	75mm
Water tightness	Class 5A
Wind load resistance	Class C2
Air permeability	Class 3
Sound insulation	42dB

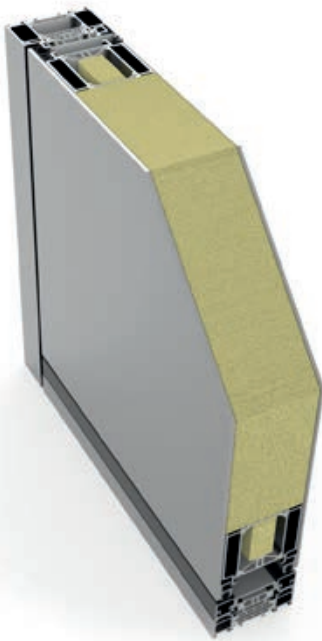

Features & benefits


- ✓ German 75mm deep insulated frame with mechanical & glued corners for high performance construction and life expectancy
- ✓ Marine grade powder coat finish as standard suitable for all locations
- ✓ Laminated triple glazing as standard for maximum security
- ✓ Extensive choice of external and internal colours giving maximum design choice
- ✓ Low level threshold as standard for disability access compliance
- ✓ Double gasket sealing system for high weather performance
- ✓ Moveable pivot point to allow maximum clear door opening
- ✓ 316 Grade Stainless steel handles & fittings suitable for all locations
- ✓ Sidelights and fanlights in single frame construction offering minimal frame design
- ✓ Optional custom design or glass etching for individual design
- ✓ Available with motorised locking for use with finger scan locking systems and home smart properties
- ✓ Secure By Design and PAS 24 Certified for full new build compliance
- ✓ Optional 25mm high projecting cills for ease of installation

Your quotation

Date: 10.07.23
Quote ref: 239268GH

Profile specification

Profile	Exclusive
Profile Thickness	75mm
U-Value	0,72 W/m²K
Glazing	69mm triple glazed
Panel Thickness	75mm
Water tightness	Class 5A
Wind load resistance	Class C2
Air permeability	Class 4
Sound insulation	42dB

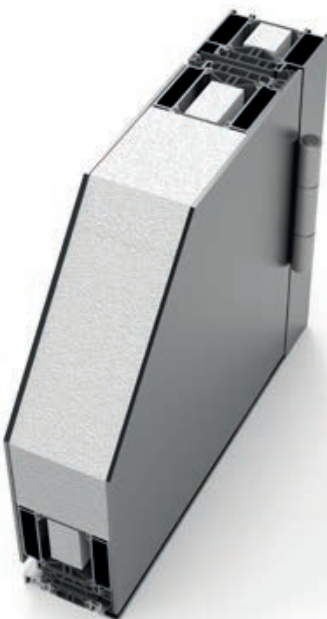

Features & benefits

- ✓ German 75mm deep insulated frame with mechanical & glued corners for high performance construction and life expectancy
- ✓ Marine grade powder coat finish as standard suitable for all locations
- ✓ Laminated triple glazing as standard for maximum security
- ✓ Extensive choice of external and internal colours giving maximum design choice
- ✓ Low level threshold as standard for disability access compliance
- ✓ Triple gasket sealing system for high weather performance
- ✓ Hidden fixing system with cover trims to frame & door sash for minimal maintenance and clean look appearance
- ✓ 316 Grade Stainless steel handles & fittings suitable for all locations
- ✓ Sidelights and fanlights in single frame construction offering minimal frame design
- ✓ Optional custom design or glass etching for individual design
- ✓ Available with motorised locking for use with finger scan locking systems and home smart properties
- ✓ Secure By Design and PAS 24 Certified for full new build compliance
- ✓ Optional 25mm high projecting cills for ease of installation

Your quotation

Date: 10.07.23
Quote ref: 239268GH

Profile specification



Profile	Eco
Profile Thickness	65mm
U-Value	1.40W/m ² K
Glazing	24mm double glazed
Panel Thickness	28mm
Water tightness	Class 6A
Wind load resistance	Class C2
Air permeability	Class 4
Sound insulation	38dB

Features & benefits

- ✓ German 65mm deep insulated frame with mechanical & glued corners for high performance construction and life expectancy
- ✓ Marine grade powder coat finish as standard suitable for all locations
- ✓ Laminated double glazing as standard for maximum security
- ✓ Triple gasket sealing system for high weather performance
- ✓ 316 Grade Stainless steel handles & fittings suitable for all locations
- ✓ Sidelights and fanlights in single frame construction offering minimal frame design
- ✓ Optional custom design or glass etching for individual design
- ✓ Available with motorised locking for use with finger scan locking systems and home smart properties
- ✓ Secure By Design and PAS 24 Certified for full new build compliance

Your quotation

Date: 10.07.23
Quote ref: 239268GH

Profile specification



Profile	NET
Profile Thickness	65mm
U-Value	1.40W/m ² K
Glazing	24mm double glazed
Panel Thickness	28mm
Water tightness	Class 6A
Wind load resistance	Class C2
Air permeability	Class 4
Sound insulation	38dB

Features & benefits


- ✓ German 65mm deep insulated frame with mechanical & glued corners for high performance construction and life expectancy
- ✓ Marine grade powder coat finish as standard suitable for all locations
- ✓ Laminated double glazing as standard for maximum security
- ✓ Triple gasket sealing system for high weather performance
- ✓ 316 Grade Stainless steel handles & fittings suitable for all locations
- ✓ Sidelights and fanlights in single frame construction offering minimal frame design
- ✓ Optional custom design or glass etching for individual design
- ✓ Available with motorised locking for use with finger scan locking systems and home smart properties
- ✓ Secure By Design and PAS 24 Certified for full new build compliance

Your quotation

Date: 10.07.23
Quote ref: 239268GH

Profile specification

Profile	Standard
Profile Thickness	75mm
U-Value	0,95W/m²K
Glazing	39mm triple glazed
Panel Thickness	44mm
Water tightness	Class 6A
Wind load resistance	Class C2
Air permeability	Class 4
Sound insulation	42dB

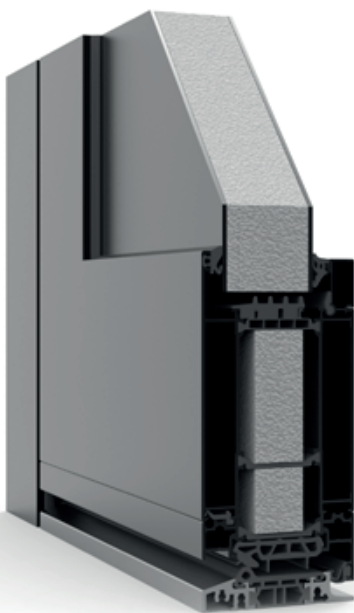

Features & benefits

- ✓ German 75mm deep insulated frame with mechanical & glued corners for high performance construction and life expectancy
- ✓ Marine grade powder coat finish as standard suitable for all locations
- ✓ Laminated triple glazing as standard for maximum security
- ✓ Extensive choice of external and internal colours giving maximum design choice
- ✓ Low level threshold as standard for disability access compliance
- ✓ Triple gasket sealing system for high weather performance
- ✓ Hidden fixing system with cover trims to frame & door sash for minimal maintenance and clean look appearance
- ✓ 316 Grade Stainless steel handles & fittings suitable for all locations
- ✓ Sidelights and fanlights in single frame construction offering minimal frame design
- ✓ Optional custom design or glass etching for individual design
- ✓ Available with motorised locking for use with finger scan locking systems and home smart properties
- ✓ Secure By Design and PAS 24 Certified for full new build compliance
- ✓ Optional 25mm high projecting cills for ease of installation

Your quotation

Date: 10.07.23
Quote ref: 239268GH

Profile specification

Profile	Modern
Profile Thickness	75mm
U-Value	0,92W/m²K
Glazing	39mm triple glazed
Panel Thickness	44mm
Water tightness	Class 5A
Wind load resistance	Class C2
Air permeability	Class 4
Sound insulation	42dB



Features & benefits


- ✓ German 75mm deep insulated frame with mechanical & glued corners for high performance construction and life expectancy
- ✓ Marine grade powder coat finish as standard suitable for all locations
- ✓ Laminated triple glazing as standard for maximum security
- ✓ Extensive choice of external and internal colours giving maximum design choice
- ✓ Low level threshold as standard for disability access compliance
- ✓ Triple gasket sealing system for high weather performance
- ✓ Hidden fixing system with cover trims to frame & door sash for minimal maintenance and clean look appearance
- ✓ 316 Grade Stainless steel handles & fittings suitable for all locations
- ✓ Sidelights and fanlights in single frame construction offering minimal frame design
- ✓ Optional custom design or glass etching for individual design
- ✓ Available with motorised locking for use with finger scan locking systems and home smart properties
- ✓ Secure By Design and PAS 24 Certified for full new build compliance
- ✓ Optional 25mm high projecting cills for ease of installation

Your quotation

Date: 10.07.23
Quote ref: 239268GH

Profile specification

Profile	Premium
Profile Thickness	75mm
U-Value	0,67W/m²K
Glazing	88mm quadruple glazed
Panel Thickness	94mm
Water tightness	Class 5A
Wind load resistance	Class C2
Air permeability	Class 4
Sound insulation	44dB

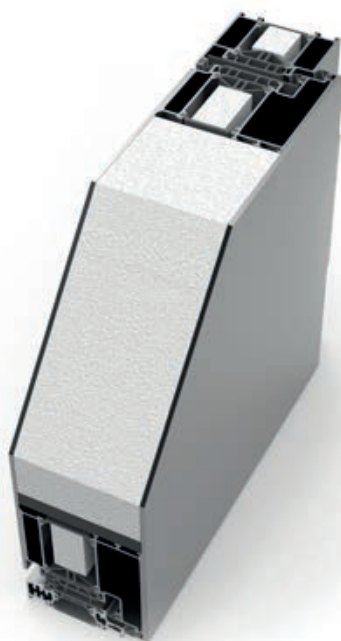

Features & benefits

- ✓ German 75mm deep insulated frame with mechanical & glued corners for high performance construction and life expectancy
- ✓ Marine grade powder coat finish as standard suitable for all locations
- ✓ Laminated quadruple glazing as standard for maximum security
- ✓ Extensive choice of external and internal colours giving maximum design choice
- ✓ Low level threshold as standard for disability access compliance
- ✓ Triple gasket sealing system for high weather performance
- ✓ Hidden fixing system with cover trims to frame & door sash for minimal maintenance and clean look appearance
- ✓ 316 Grade Stainless steel handles & fittings suitable for all locations
- ✓ Sidelights and fanlights in single frame construction offering minimal frame design
- ✓ Optional custom design or glass etching for individual design
- ✓ Available with motorised locking for use with finger scan locking systems and home smart properties
- ✓ Secure By Design and PAS 24 Certified for full new build compliance
- ✓ Optional 25mm high projecting cills for ease of installation