


EXAM

Complete the following topology using the steps outlined below within **35 minutes**.

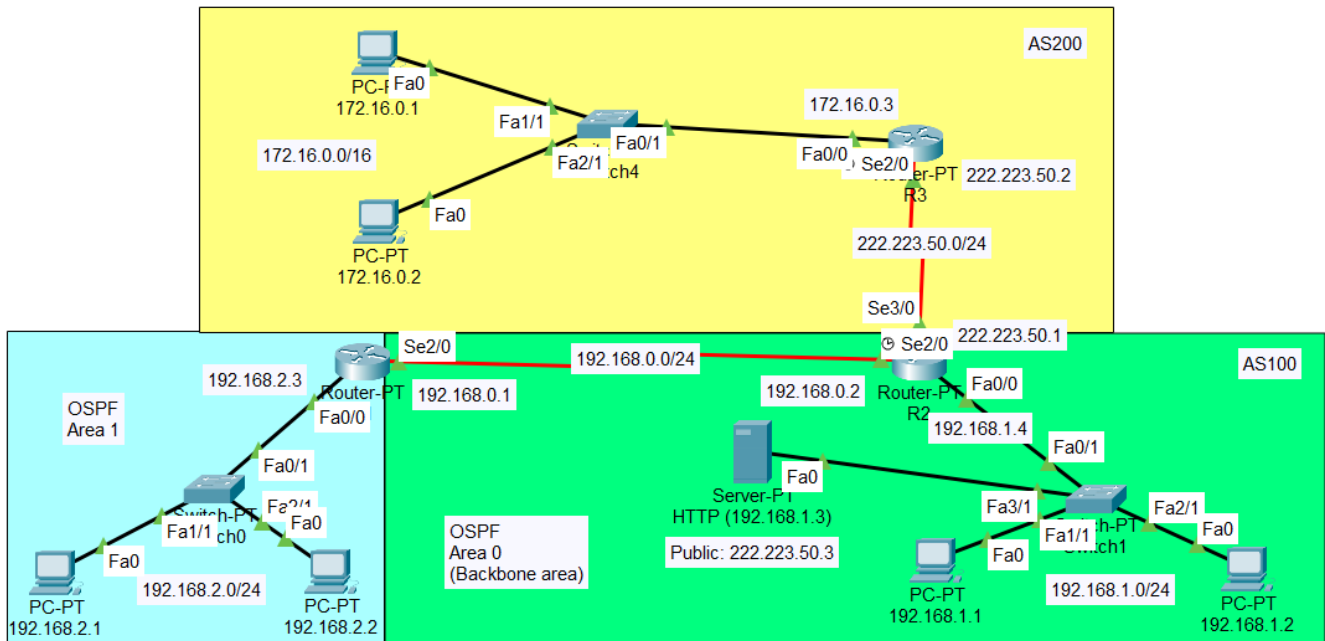

1. Assign the designated IP addresses and hostnames to all network devices according to the provided topology.
2. Configure OSPF on R1 and R2, dividing the network into OSPF areas as per the scheme diagram.
3. Enable BGP on R2 and R3 to advertise the 222.223.50.0/24 network.
4. Deny all inbound traffic to PC-PT 192.168.2.1.
5. Add (and activate) a HTTP/DNS server 192.168.1.3 in 192.168.1.0/24 (AS 100). The domain name for the server should be your *first_lastname.com*. Configure DNS settings on devices connected to the 192.168.1.0/24 and 192.168.2.0/24 networks, in AS 100.
6. Configure static NAT mapping for 192.168.1.3 to the public IP 222.223.50.3 (public IP) in AS 100.
7. Set DNS (222.223.50.3) on PCs connected to the 172.16.0.0/16 network after setting NAT overload for 172.16.0.0/16 at Se2/0 of R3 (in AS 200).

RULES

1. This is a closed-book exam. Any use of the internet or external resources outside the “Cisco Packet Tracer” program will be deemed as cheating.
2. Synchronize your device's clock to the CET or CEST time zone before beginning the exam.
3. Begin with a fresh exercise file. Prior to starting your tasks:
 - a. Ensure the Cisco Packet Tracer Activity file Logical Workspace is empty of components.
 - b. Verify that the Command Log is completely blank.
4. Configuration of routers must be done exclusively via the "CLI" (Command Line Interface). The GUI is permitted only for configuring end devices (hosts/servers).
5. Upon completing the exam:
 - a. Save your file in the format “First-name_Last-name.pkt”.
 - b. Submit your Cisco Packet Tracer Activity file (.pkt) to your teacher by email.
 - c. Submit your file within 5 minutes of the exam’s conclusion. Files received after this grace period will incur penalties.
6. Any submitted exam file (.pkt) with modifications to the Command Log (e.g., deletion of rows or columns) will be treated as a violation and considered cheating.