

Q1: Select the most correct answer: (15 points)

1. What's the equivalent of $t2 = A[A[0]]$ in assembly where the base address of A is in $s0$:
- a. lw $t0, 0(s0)$
lw $t2, 0(t0)$
 - b. lw $t0, 0(s0)$
sll $t1, t0, 2$
add $t1, s0, t1$
lw $t2, 0(t1)$
 - c. lw $t0, 0(s0)$ ~~$A[0]$~~
add $t1, s0, t0$
lw $t2, 0(t1)$
 - d. lw $t2, 0(s0)$
2. Which of the following instructions uses PC-relative addressing?
- a. addi $t1, t2, 10$
 - b. lw $t0, 4(s0)$
 - c. jr ra
 - d. beq $t0, t1, LABEL$
3. Assume a new instruction **move $t0, t1$** that copies the contents of $t1$ to $t0$. Which of the following standard MIPS instructions is **NOT** equivalent to this operation?
- a. add $t0, t1, zero$
 - b. addi $t0, t1, 0$
 - c. sub $t0, t1, zero$
 - d. sub $t0, zero, t1$
4. Decode the machine instruction **0x014B4820**:
- a. add $t1, t2, t3$
 - b. addi $t1, t2, 20$
 - c. and $t1, t2, t2$
 - d. sub $t1, t2, t3$
5. Which of the following registers is used with one of J-type instructions?
- a. $t0$
 - b. ra
 - c. $s0$
 - d. $s3$
6. What's the final value stored in $t0$ after executing **lui $t0, 0x1234$** , assuming $t0$ originally contains 0?
- a. 0x12340000
 - b. 0x00001234
 - c. 0xFFFF1234
 - d. 0x1234FFFF
7. If a **beq $t0, t1, Label$** at address 0x00400020 branches to 0x00400028, what is the value of **Label**?
- a. 1
 - b. 6
 - c. 4
 - d. 8

Student name: _____

Student ID: _____

8. In which case can signed overflow occur in the operation $A - B$:

- a. A is positive and B is positive
- b. $A = 0$ and $B = 0$
- ☒ c. A is positive and B is negative
- d. A is negative and B is negative

9. Assume a 4-bits multiplicand and a 4-bits multiplier, what's the size of the ALU that could perform the first-version multiplication :

- ☒ a. 8-bits ALU
- b. 16-bits ALU
- c. 4-bits ALU
- d. 32-bits ALU

10. What is the IEEE 754 single-precision representation of the decimal value -1.5 ?

- a. 1011 1111 0110 0000 0000 0000 0000
- ☒ b. 0100 0000 0100 0000 0000 0000 0000
- ☒ c. 1000 0000 0110 0000 0000 0000 0000
- ☒ d. 1011 1111 1100 0000 0000 0000 0000

Write your choice in the following Answers table. Other answers located outside the table will not be considered.


1.	2.	3.	4.	5.	6.	7.	8.	9.	10.
c	c	d	b	b	a	a	c	a	d

10.5

Student name: _____

Student ID: _____

Q2: Based on Chapter 3 (ALU Design). Your goal is to understand the following design and answer the questions associated to it. Consider the distribution of the selectors (15 points)

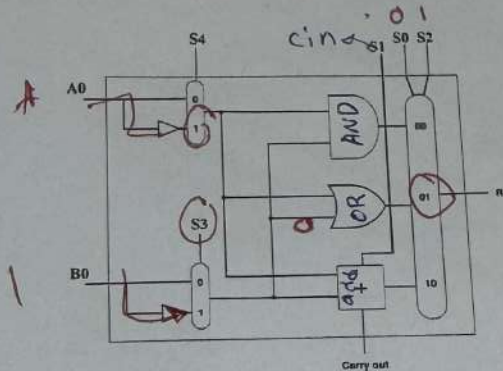

1. [2.5 points] Write down input signals to perform subtraction ($A - B$):

S4	S3	S2	S1	S0
0	1	0	1	1

2. [3.5 points] Write down input signals to support a new instruction called "INC A" which increments A by 1 ($A = A + 1$):

A0	B0	S4	S3	S2	S1	S0
0	0	0	0	0	1	1

3. [3.5 points] Write down input signals to support a new instruction called "DEC A" which decrements A by 1 ($A = A - 1$):

A0	B0	S4	S3	S2	S1	S0
0	0	0	0	0	0	1

4. [3.5 points] Write down input signals to support a new instruction called "INV A" which inverts A. For example, if $A = 0001$, then INV A returns 1000: 1110

A0	B0	S4	S3	S2	S1	S0
0	0	0	1	1	1	0

5. [2 points] Draw the logic circuit diagram for the carryout in the full adder:

