



**CULTUURCENTRUM
DE FACTORIJ**

ZAVENTEM

Technical Rider

Ivo Maupertuis Theater Hall

[DOWNLOAD THE MOST RECENT FILE HERE](#)

Table of contents

Table of contents	2
Loading and unloading	3
Parking	3
Dimensions	4
Floor and curtains	5
Curtains	5
Rigging	6
Power	7
Audio	7
Light and video	7
Light	8
Consoles	8
Conventional light	8
Intelligent light	8
Various materials	8
FX	8
Colour gels	9
Sound	10
D&B Yi line array	10
Consoles	10
Microphones	11
Video	12
Various materials	12
Communication	12
Addenda	13
Plans	13
Photos	13
Contact info	14
Technical team	14

Loading and unloading

The loading dock is located at Keibergstraat 1 where a long ramp leads from street level to a partially covered loading area below street level. The angle of this ramp is 4° and there is 24 meters of flat surface in front of the dock.

There is a dock leveler for the Maupertuis Theater Hall. The distance from the loading dock to the stage is 11 meters. There is also access from ground level by way of a lift, this path is approximately 17 meters from the stage. This lift measures 2 by 1.9 meters with doors measuring 0.9 by 2.1 meters.



Parking

In the loading area there is parking foreseen for a maximum of 3 automobiles and one truck / LKW. This area is closed from the public by means of an automatic gate. A four digit code will be provided which allows access to the gate and artist entry. This code will only be valid on build and performance days.

In the Keibergstraat and the Willem Lambertstraat parking lots there is free parking with the use of a European blue parking disc. These are valid for up to four hours between 8:00h and 20:00h, with the exceptions of Saturdays, Sundays and bank holidays. If the blue parking discs are unfamiliar to the production they can be provided.

If requested beforehand, longer term parking passes on the Keibergstraat parking lot can be provided.

Dimensions


The proscenium arch measures 18 meters wide and can vary in height between 6 and 9 meters. The total height of the stage is 14.5 meters downstage and 13.5 meters upstage.

The depth of the stage from stage opening to backdrop is 13 meters without the apron; with the apron an additional 2.6 meters. The apron is curved, measuring 2.6 meters in the center and 1.35 meters at both sides. The apron is supported by hydraulic lift and can be lowered to be used as an orchestra pit.

There are 652 seats in full occupation. The hall is divided into three zones: balcony, upper ground floor and lower ground floor. If renting, each organization is requested to provide a number of volunteers, suited to audience size, to act as ushers. If these cannot be provided, contact info@ccdefactorij.be or the booking contact.

- full occupation: 652
- without balcony: 438
- lower ground floor only: 303

There are always 22 removable seats to provide space for wheelchair users. There are 3 wheelchair accessible spaces as standard available.

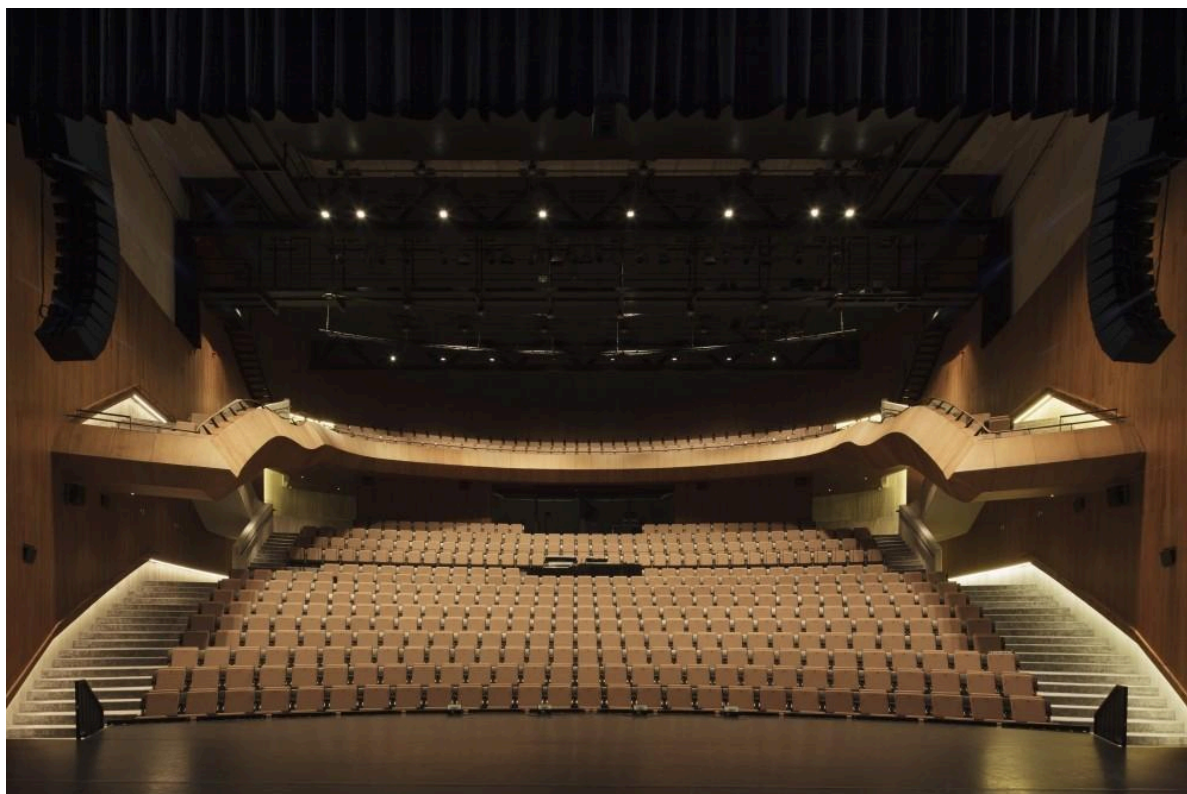

Floor and curtains

The whole stage floor is covered with a fixed dance carpet (Harlequin Standfast). This is a sprung floor to accommodate dance performances and reduce vibrations.

Curtains

- Black velvet (Velours Verdi) legs and borders
- Black velvet (Velours Bellini) Backdrop on rail with manual control stage left
- Black Velvet (Velours Bellini) Front curtain on rail with manual control stage right
- White Cyclorama (Cyclo 270)
- Black curtains (Molton) on left and right wings
- Prolyte Stage skirts 1m x 6m
- Prolyte Stage skirts 0.6m x 6m
- Prolyte Stage skirts 0.4m x 6m
- Prolyte Stage skirts 0.2m x 6m
- Prolyte aluminum profiles to hide stage skirts
- Gauze curtain (Gobelin Tulle) 9m x 20m
- 20 meters EasyDrape Set
- 20 Stage weights 10kg

Rigging

40 battens above stage, 2 on the sides, all digitally motor-controlled through a Moveo/OpenCue system. See enclosed rigging plan for more details.

- T1, T2, T3, T37, T39 and T40 are in use for curtains, borders and backdrops. If these battens are absolutely needed, please contact the chief technician within a reasonable time prior to the event.
- T20 cannot be used in any way. It is permanently in use for the cinematic projection screen. Due to its weight, nothing else can be rigged on this batten. This batten cannot be cleared under any circumstances.
- The proscenium/apron can be lowered and used as an orchestra pit. If it is desired to use it as an orchestra pit, please contact the chief technician of the theater.
- The SWL limitations for each batten are as follows : total load 300kg. 100kg point load. 200kgs/meter load, distributed evenly. Every batten has an extension of max 0.5m at the ends, the maximum load on these extensions is 25kg
- The battens labeled “1 tonnes” have an acoustic panel weighing 700 kg permanently rigged. The same load limits apply.
- Only one batten above the audience can be used for conventional lighting. All others above the audience are in permanent use for the house audience lights. If extra lighting is required from the front of house, please contact the chief technician of the theater.
- If the acoustic panels are in use, a very limited number of battens are left to be used for lighting. Please contact the chief technician of the theater.
- In accordance with legal restrictions, hoisting of persons and changeovers during shows are strictly prohibited. There can be no exceptions.
- The stage lift and orchestra pit lift cannot be used to transport persons. Both are placed in position before the start of the show.
- There is no option to secure motors directly to the roof
- A venue technician is always present and will control the motor system.

A basic list of provided rigging materials:

- Polyester sling (soft sling) SWL 2000 kg in 1,2 en 3m
- Steel Cable sling (softsteel) SWL 2000 kg in 0.5, 1 en 3m
- D-harp/shackles of 500, 1000 en 2000 kg SWL
- Quick Trigger Clamps (C-clamp with eyebolt) 500 kg SWL
- Global Truss Swivel Couplers (double C-clamps) 500 kg SWL

Please find a detailed rigging plot in the addenda. For special situations or specific questions regarding rigging, please contact the chief technician of the theater.

Power

There are separated power sources for audio and for light/video, decoupled by an isolation transformer.

Audio

Stage right - coté jardin	Stage left - coté cour
1 x 63A CEE (red/3-phase) 1 x 32A CEE (red/3-phase)	1 x 32A CEE (red/3-phase)

Light and video

Stage right - coté jardin	Stage left - coté cour
1 x 63A CEE (red/3-phase)	1 x 125A CEE (red/3-phase) 1 x 63A CEE (red/3-phase)

Cables can be provided for all of these up to 25 meters.

The following portable distribution boxes can be provided:

- 1x 125A (red) to 1x 63A (red), 2x 32A (red), 6x 16A schuko (blue)
- 1x 63A (red) to 4x32A (red) and 2x16A schuko (blue)
- 2x 32A (red) with throughput connector for 32A (red) to 1x16A (red) and 3x16A schuko (blue)
- 2x 16A to 3x 16A schuko (blue)

Type F CEE 7/4 Schuko connectors are used at 230V.

Theatrical lighting in the Maupertuis hall is connected with CEE 16 amp (blue/single phase) connectors.

Any necessary converters are expected to be provided by the production. Give at least 4 weeks notice if this is not possible.

All electrical equipment is compliant with local code.

Light

ADB Memoracks, 216 dimmable channels 4Kw. There is no option to hard patch.

DMX over sACN: 8 looms DMX/power in the ceiling, on the floor 10 DMX ports. Each DMX connection can be assigned to whatever universe.

Consoles

- Chamsys MQ80 with 2 fader wings
- MA Dot2 XL-R with fader wing

Conventional light

- 14 x ADB C203 2kW,
- 15 x ADB DN 205 13-36° 2kW
- 15 x ADB Warp 12-30° 800W
- 48 x Par, CP60 , 61 , 62 and 91 available, 1kW
- 36 x ADB C103 1.2kW
- 12 x ADB Fresnel 1kW
- 8 x ADB Fresnel 2kW

8x ADB C203 2kW and 15x ADB DN 205 13-36° 2kW are hanging as standard in the frontbridge.

Intelligent light

- 12 x Robe Spider
- 8 x Robe Robin Viva CMY
- 28 x Fargo Stagepar 19 Pro Zoom MKII
- 9 x Showtec LED Light Bar 12 Pixel 12x4W RGBW
- 14 x Robert Juliat 860 Dalis MKII

Various materials

- 10 x floorstand
- 6 x Manfrotto light stand, height 3,8 meters
- 8 x ballet tower
- ELC Focus Hand 3

FX

- 1 x MDG ATMe Hazer
- 2 x Swefog Duramax Intellahazer

All equipment is shared between 2 halls. Please check availability with technicians before your arrival in the venue.

Sound

Maupertuis theater consists of a class A PA system with optimal spread across the entire audience. The inbuilt theater surround system is only effective in the lower seating area.

The front of house position is set up in the middle of the audience, not in a separate booth, behind windows or under a balcony.

D&B Yi line array

- Yi line arrays with flown subs left and right
- Sub stacks left and right
- infills, nearfills and outfills
- 12 x M4 monitors

Consoles

- Allen & Heath D-Live S7000
- Allen & Heath D-Live S5000
- Allen & Heath DM48
- Allen & Heath DM32
- Yamaha TF3 with Yamaha Tio 1608-D

All consoles are fitted with Dante network cards.

A 10EaZy sound registration system is used for monitoring the sound levels during the shows. The limit for Maupertuis Theater is 95dB Leq 15mins. In case of violation the sound engineer will be held responsible.

For acoustic performances, three acoustic reflection panels can be hung above stage for a better reflection towards the audience. If these are necessary, please contact the chief technician well before the build date.

Microphones

8	AKG - C214
1	AKG - D112
10	Audio-Technica - ATM350
4	Audio-Technica - ATM450
2	Beyerdynamic - M88T
10	BSS AR133 DI
1	DPA - 4011 Stereo paar
1	DPA - 4098 Gooseneck
6	DPA - 4466
2	DPA - Dfine 66
2	Electro-Voice - RE 20
4	Neumann - KM184
2	Neumann - KMS105
1	Neumann - U87
1	Radial PRO D2 Stereo DI
7	Rode - NTG2
6	Sennheiser - E904
2	Sennheiser - E906
4	Sennheiser - MD421
1	Shure - Beta 52
6	Shure - Beta 58
4	Shure - Beta 87
2	Shure - KSM 8
2	Shure - KSM 9
2	Shure - QLXD1
2	Shure - QLXD24/SM58
10	Shure - SM57
9	Shure - SM58
1	Shure - SM58 met switch
2	Shure - SM81
6	Shure - ULXD1
6	Shure - ULXD24/SM58

Stands

- 2 K&M - bass drum microphone stand
- 18 K&M - large microphone stand
- 8 K&M - small microphone stand
- 4 K&M - table microphone stand

All consoles, microphones and stands are shared between 2 halls. Please check availability with technicians before your arrival in the venue.

Video

- Barco DP4K-23B - 4K projector 24.500 lm (permanently set up in the projection booth)
- Panasonic Projector 8000 lm (mobile) PT-EZ770ZL (lens: ET-ELS20)
- Cinematic projection screen (T20) 16,5m by 7,5m
- Mobile projection screen
- a assortment of converters SDI - HDMI
- Bose Cinema processor with 5.1 surround system
- Bluray/DVD player
- 10 HDMI input switcher
- Gofilex movie vault

For the movie programme, file format and file size to use our 4k and surround capabilities, please contact the chief technician of the theater.

Various materials

- 32 Prolyte stage risers 2 x 1 meters
- 5 Prolyte stage risers 1 x 1 meters
- 2 Prolyte stage risers 1 x 0.5 meters
- Legs available in 20cm, 40cm, 60cm, 80cm and 1m
- 2 modular stairs for stage risers, up to 1m.
- Banisters for our stage risers
- Clamps for connecting risers
- 70 orchestra seats black (Manutan Fancy)
- 35 Wenger Classic music stands
- 40 Mighty Bright music stand lights LED (battery)
- Conductors stage
- Conductors music stand
- Stagg piano seat
- Lectern

Communication

- 6 x GreenGo Beltpack X
- Connections for intercom system stage left, right, booth, projection booth and loading dock

Addenda

Plans

All plans can be found here:  Theaterzaal Maupertuis .

Photos

More info and photos can be found on our website: www.ccdefactorij.be.

Contact info

For any questions regarding rental, please send your inquiry to zaalverhuur@ccdefactorij.be.

For any general questions, please contact our front desk.

Front desk

info@ccdefactorij.be

02 307 72 72

Technical team

General

techniek@ccdefactorij.be

02 307 72 70

Bruno Peysmans

bruno.peysmans@ccdefactorij.be

Evelyne Renaux

evelyne.renaux@ccdefactorij.be

Sebastiaan Kruk

sebastiaan.kruk@ccdefactorij.be