




ATTENUVERTERS

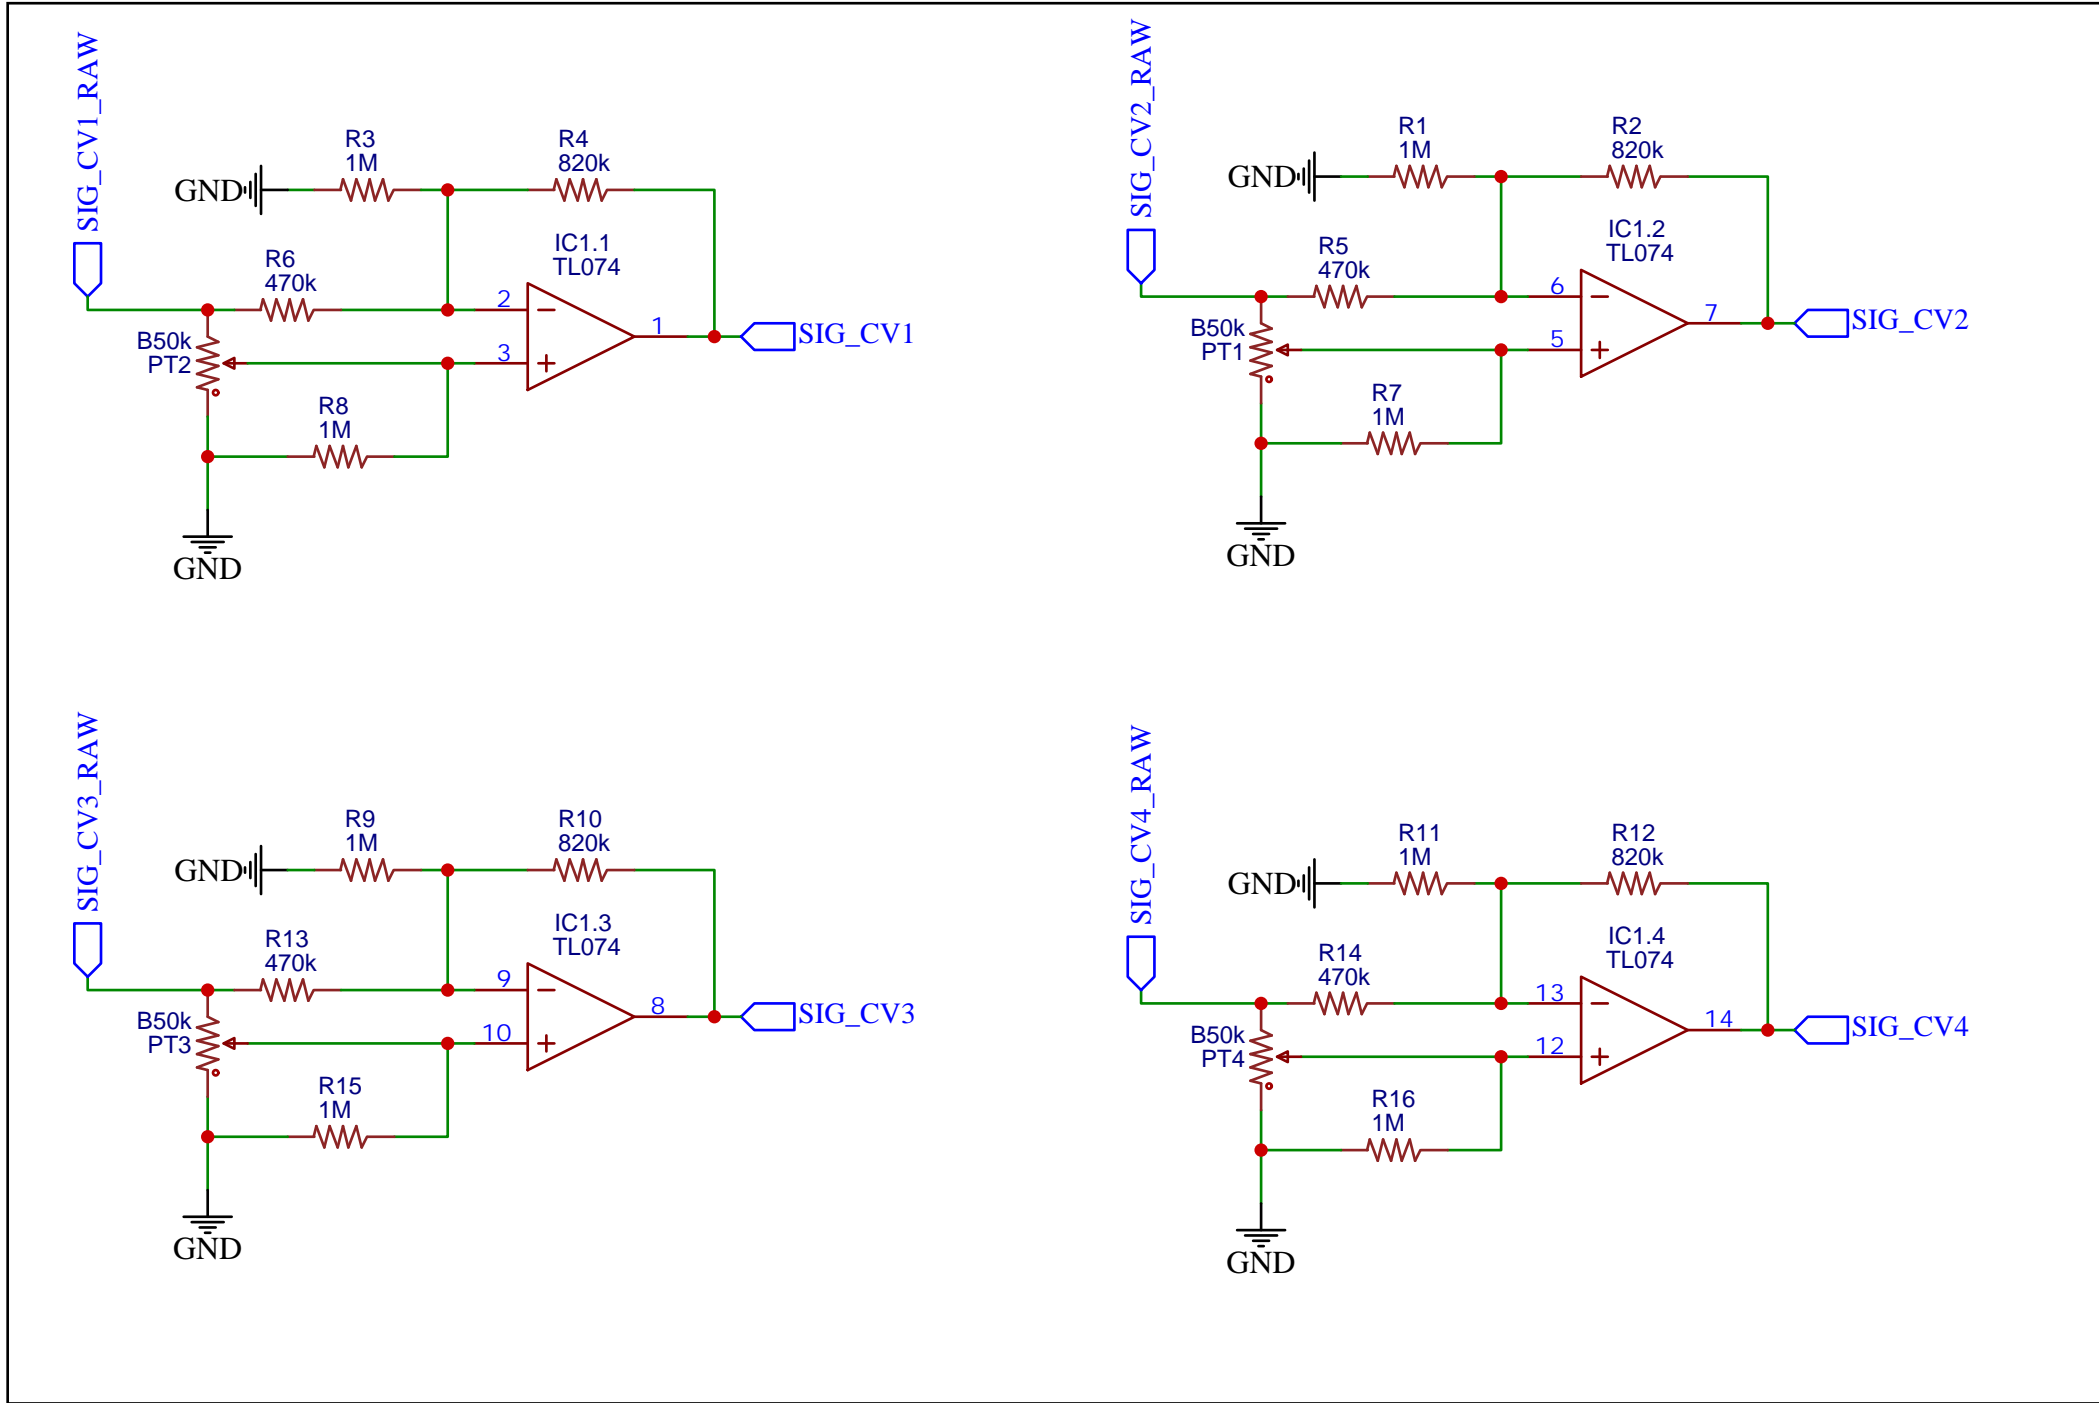

CV INPUTS

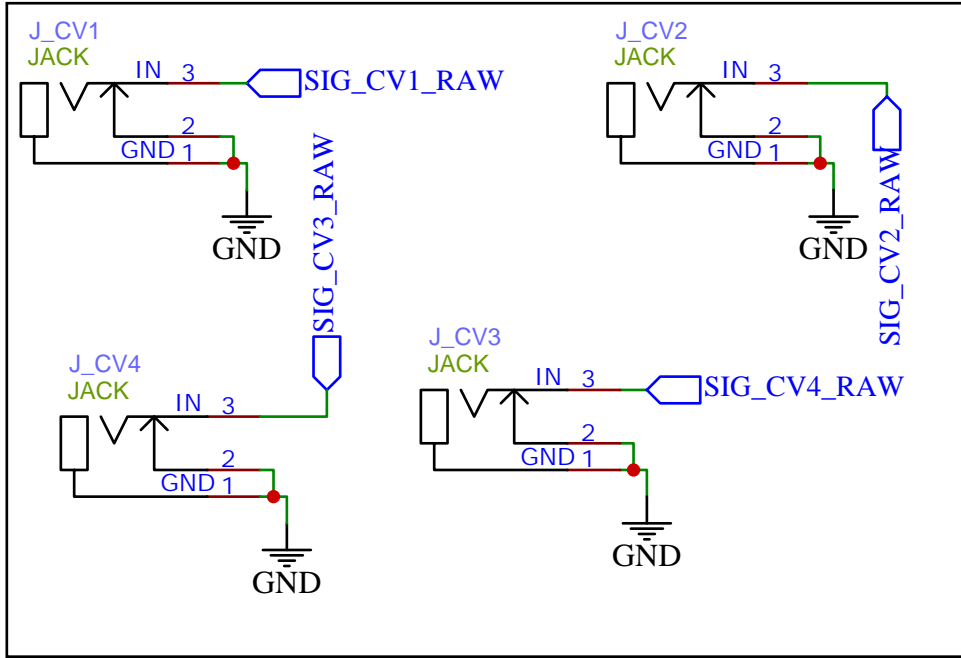


AUDIO IN/OUT

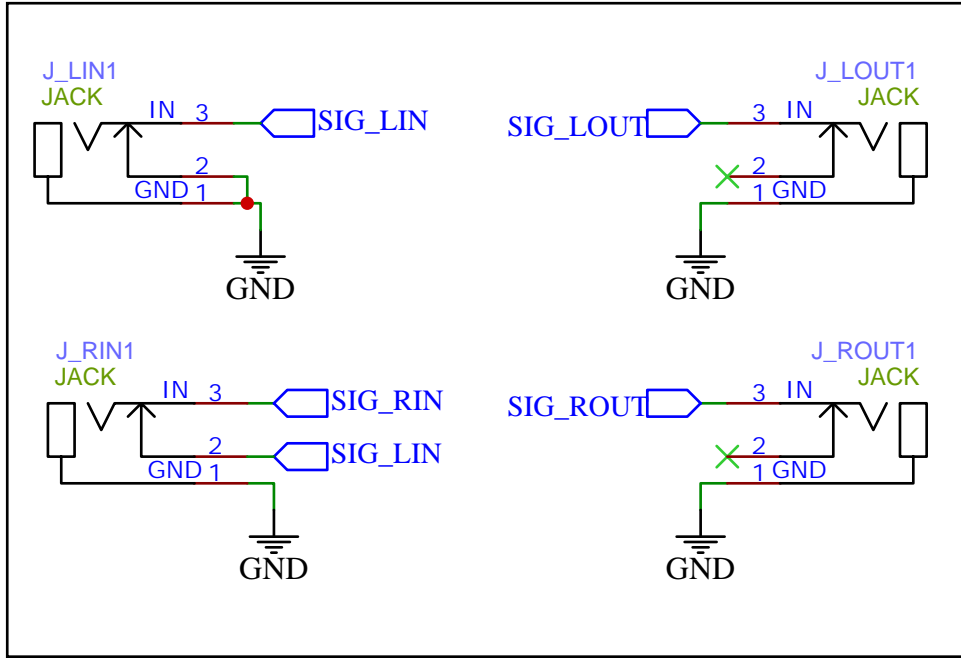


DAISY SUBMODULE

The generic comm. protocols are connected directly to the processor.
This means they can be used for standard functions including switches, LEDs, etc.


The CV in pins are -5V to 5V inputs
The CV out pins are 0-5V output
The Gate in pins are connected to BJT circuits
The Gate out pins are identical to the CV output circuit

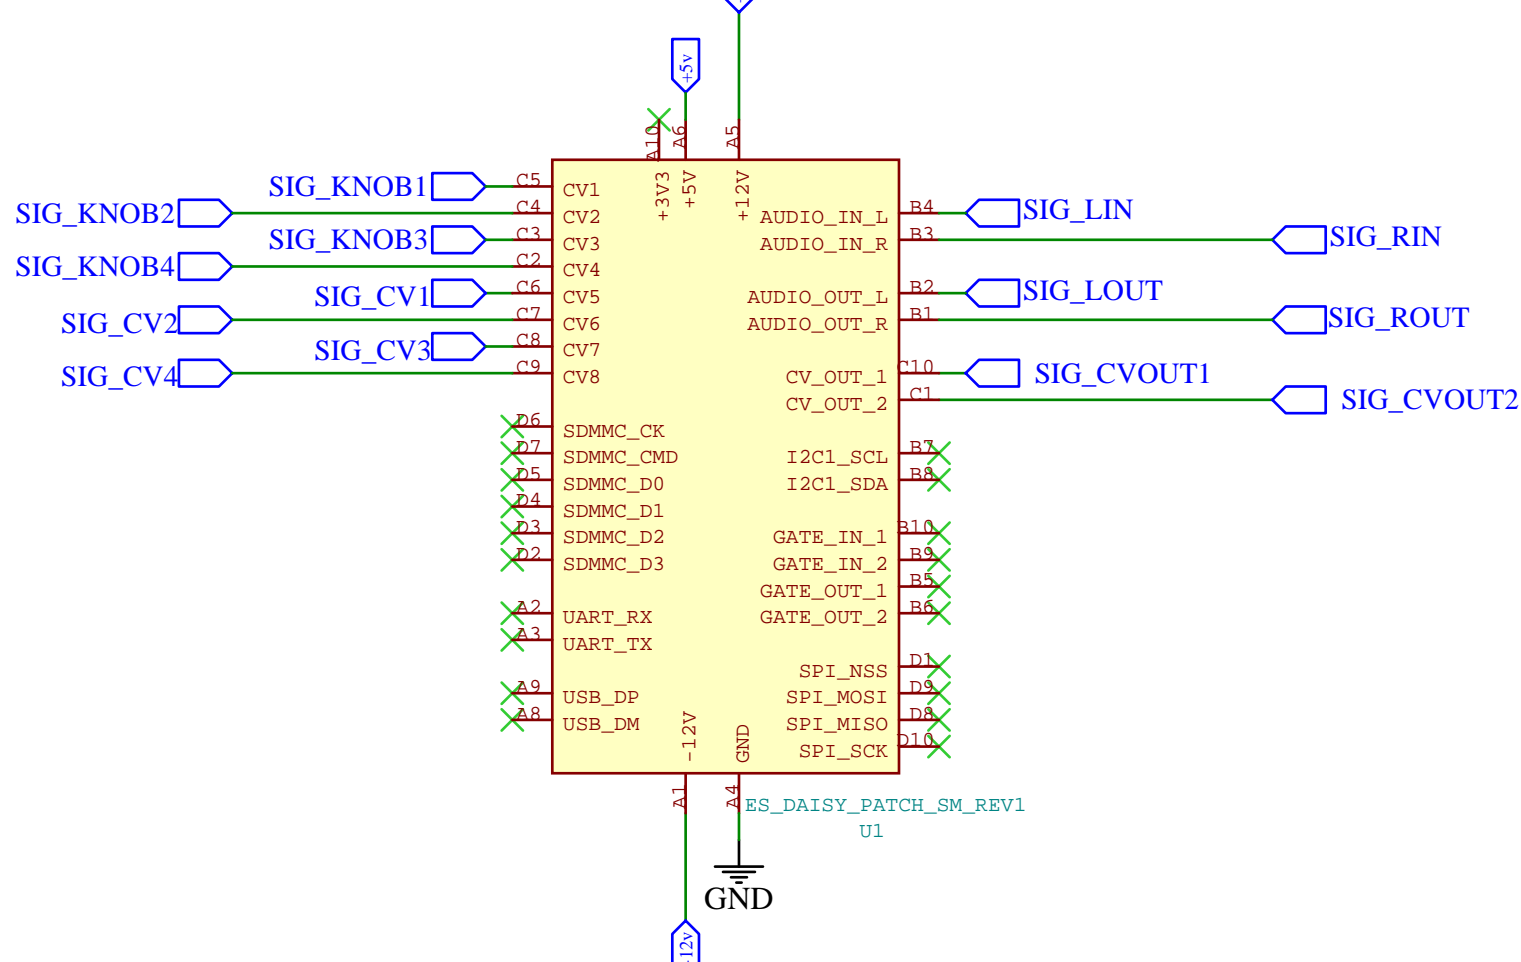

CV OUT

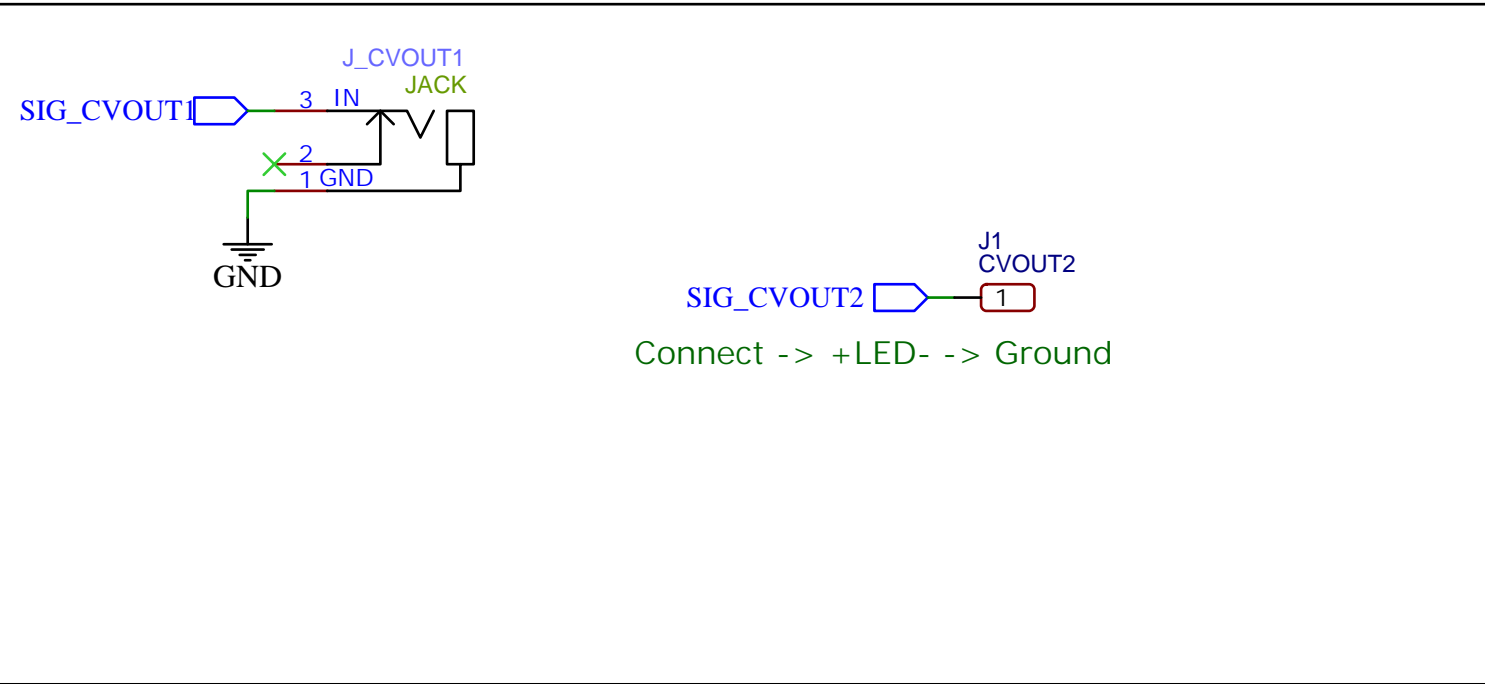

KNOBS

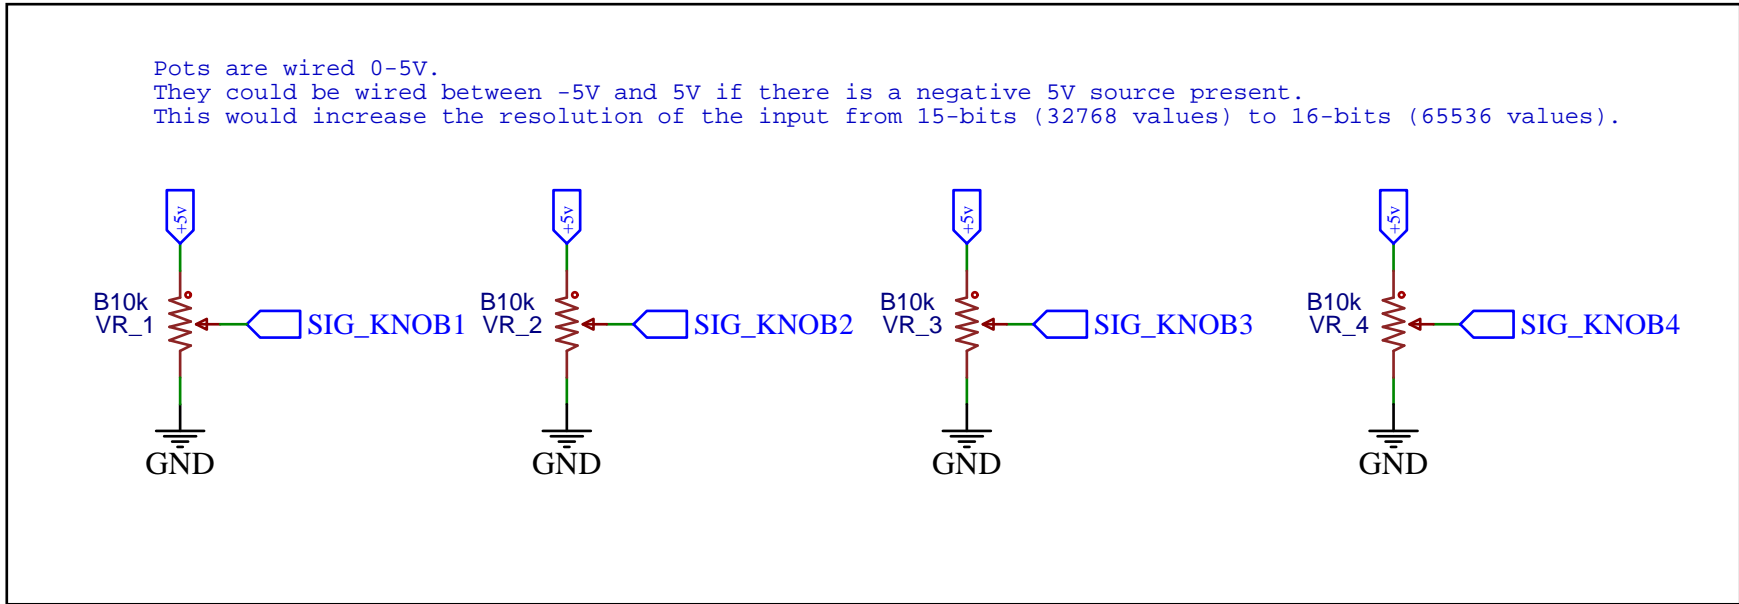

POWER

