KC Fixit
FIX IT RIGHT, FIX IT ONCE

KC FIXIT
ADVANCED CONSTRUCTION CHEMICALS SOLUTIONS

Transforming the way Modern Projects are built, This Is the Era of KC FIXIT Construction Chemicals

The KC FIXIT *Promise*

Strong Builds. Stronger Bonds. One Solution.

Our Commitment To **Quality**

1

Innovative bonding solutions that deliver strong, reliable, high-quality performance for every build.

2

Our products are developed with a focus on strength, consistency, and ease of application.

Engineered for Indian Substrate.

3

Every formulation reflects our commitment to adhesion and long-term performance.

> "Every KC FIXIT product is formulated to deliver stability, adhesion & long-term reliability on real construction sites."

FOUNDER'S *Statement*

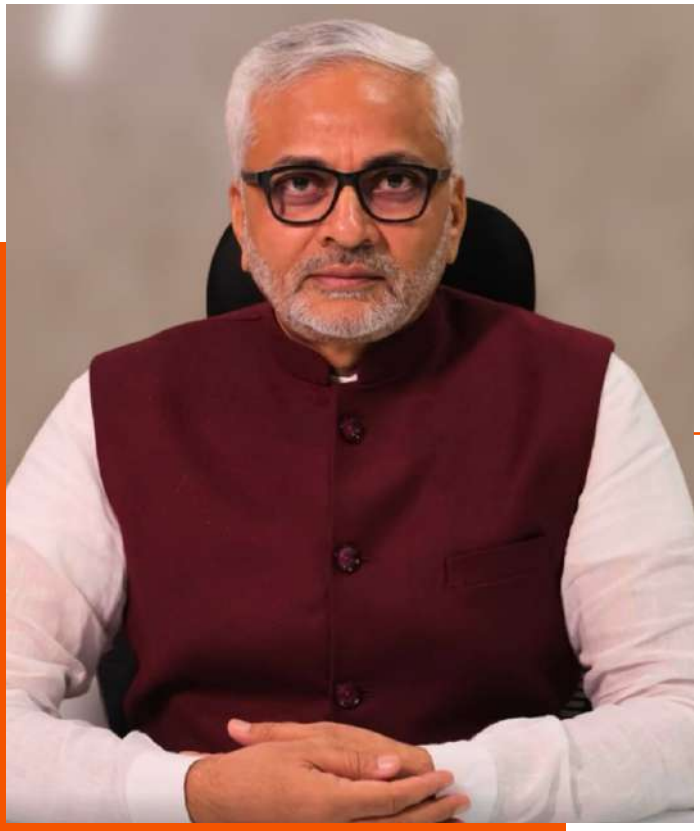

Hello, I'm

Mathur Bhai Savani

Founder of KC Fixit

"With nearly three decades of involvement in the construction and building materials industry"

The foundation of KC FIXIT is built on deep, hands-on industry experience. With long standing involvement in building materials and sand manufacturing, the team behind KC FIXIT developed a strong understanding of raw materials, site conditions, & practical construction challenges. This experience led to the decision to enter the construction chemicals industry with a clear goal to create products that work reliably on actual construction sites, under Indian climate and surface conditions.

KC FIXIT was started with a focus on quality manufacturing, consistent formulations, and long-lasting performance. Every product is developed to provide strong bonding, effective protection, and dependable results, helping builders and contractors achieve better and more durable construction outcomes.

KC FIXIT AT A *Glance*

A Trusted Manufacturer of High-Performance Construction Chemicals

WHO WE ARE

KC Fixit is a next-generation construction chemicals manufacturer delivering high performance tile adhesives, grouts, plasters, and waterproofing systems engineered for modern infrastructure.

With a focus on German-grade formulations, precision manufacturing, and strict quality governance, KC Fixit delivers products trusted by contractors, developers, and architects for long-term structural performance.

BUILT ON 25 YEARS OF EXPERTISE

KC FIXIT *Designed*

for Today's Modern Construction Needs

Our **Vision**

To deliver reliable, performance oriented construction solutions **trusted by professionals** for consistency and quality.

Our **Mission**

To manufacture **accurate, quality tested** construction chemicals

To ensure **batch-to batch consistency** using controlled manufacturing processes

To support **on-site application** with technical guidance

> To continuously develop durable, high-bonding formulations by investing in advanced material science & polymer technology

PRODUCT RANGE *Summary*

KC Fixit- **India's No.1** Construction Chemicals Manufacturer

Designed for Modern Projects & Everyday Construction

Our Complete Construction Chemicals Range

• Categories •

- Tile Fixing Solutions
- Tile Joint Fillers & Grouts
- Epoxy Grouting Systems
- Ready-Mix Plasters
- Block Adhesives
- Waterproofing Solutions
- SBR Latex / Polymer Additives

PRODUCT *Portfolio*

Overview of our Product Range:

KC FIXIT STANDARD
(Tile Adhesives Type 1)

KC FIXIT ADVANCE
(Tile Adhesives Type 2)

KC FIXIT EXTREME
(Tile Adhesives Type 3)

KC FIXIT FLEX
(Tile Adhesives Type 4)

KC FIXIT SUPERFLEX
(Tile Adhesives Type 5)

KC FIXIT TILE GROUT
(Tile Adhesives Type 2)

KC FIXIT EPOXYSHIELD 2K
(2 Component Epoxy Resin Based Grout)

KC FIXIT EPOXYSHIELD 3K
(3 Component High Performance Epoxy Grout)

KC FIXIT BLOCK FIX
(Thin Joint Block Adhesive)

KC FIXIT PLASTO FIX
(Polymer Modified Ready mix Cement Plaster)

KC FIXIT AQUACOAT 2K
(2 Component Waterproofing System)

KC FIXIT CONCRETESEAL
(Integral LW+ Compound)

KC FIXIT SBR LATEX PRO
(SBR Based Polymer Additives)

TYPE 1 | KC FIXIT STANDARD
Tile Adhesive

C1TE
SLIP RESISTANT

Net Weight: **20 & 40 kg** Color: **Grey/White**

STRONG ADHESIVE | SLIP RESISTANT | WEATHER RESISTANT | EASY APPLICATION | NO SHRINKAGE

- For installation of Ceramic & Vitrified tiles on floor & wall in indoor areas. On Cement Based substrates like cement plaster, cement concrete, cement screed etc.
- Preferably for dry area application.Working Properties at 270 C. KC Fixit Standerd adhesive mixed with water has pot life of 2 hours and time to heavy traffic is 16-24 hours. Coverage-Approx 45 to 55 Sq.ft. per 20 kg Pack, Using 6mm x 6mm square notched trowel for a bed of 3mm.

(Actual coverage depends on substrate condition and method of application)

	Test Method	Requirement	Typical Values
Tensile Adhesion	**Dry Condition – Annex A** (Clause 5.1)	Minimum **0.50 N/mm²**	**0.75 – 0.80 N/mm²**
Shear Adhesion	**Dry Condition – Annex B** (Clause 5.2)	Minimum **1.00 N/mm²**	**1.15 – 1.20 N/mm²**
Slip Resistance	**Annex A** (Clause 5.5)	**≤ 0.5 mm**	**0.40 – 0.45 mm**

Compliance :

Complies to IS 15477:2019 – "Type 1T"
Also complies with **EN C1TE Classification**

TYPE 2 | KC FIXIT ADVANCE
Tile Adhesive

C2TE
SLIP RESISTANT

Net Weight: **20 & 40 kg** Color: **Grey/White**

STRONG ADHESIVE | SLIP RESISTANT | WEATHER RESISTANT | EASY APPLICATION | NO SHRINKAGE

- For both interior floor & wall applications and for exterior floor applications. For installation of vitrified/ fully vitrified tiles & glass mosaic tiles on cement based substrates. Can be used for wet areas, submerged areas etc. Working properties at 27c. KC Fixit Advance adhesive mixed with water has pot life of 2 hours & time to heavy traffic is 16-24 hours.
- Coverage-Approx 45 to 55 Sq.ft. per 20 kg Pack, Using 6mm x 6mm square notched trowel for a bed of 3mm

  (Actual coverage depends on substrate condition and method of application)

	Test Method	Requirement	Typical Values
Tensile Adhesion	**Dry Condition – Annex A** (Clause 5.1)	Minimum **1.00 N/mm²**	**1.25 – 1.35 N/mm²**
	Wet Condition – Annex A (Clause 5.1)	Minimum **1.00 N/mm²**	**1.15 – 1.25 N/mm²**
Shear Adhesion	**Dry Condition – Annex B** (Clause 5.2)	Minimum **1.25 N/mm²**	**2.0 – 2.10 N/mm²**
	Heat Ageing – Annex B (Clause 5.2)	Minimum **1.00 N/mm²**	**1.34 – 1.44 N/mm²**
Slip Resistance	**Annex A** (Clause 5.5)	**≤ 0.5 mm**	**0.30 – 0.45 mm**
	Wet Condition – Annex B (Clause 5.2)	Minimum **1.00 N/mm²**	**1.45 – 1.55 N/mm²**

Compliance : **Complies to IS 15477:2019 –"Type 2T"**
Also complies with **EN C2TE Classification**

TYPE 3 | KC FIXIT XTREME
Tile Adhesive

C2TE S1
SLIP RESISTANT

Net Weight: **20 & 40 kg** Color: **Grey/White**

STRONG ADHESIVE | SLIP RESISTANT | WEATHER RESISTANT | EASY APPLICATION | NO SHRINKAGE

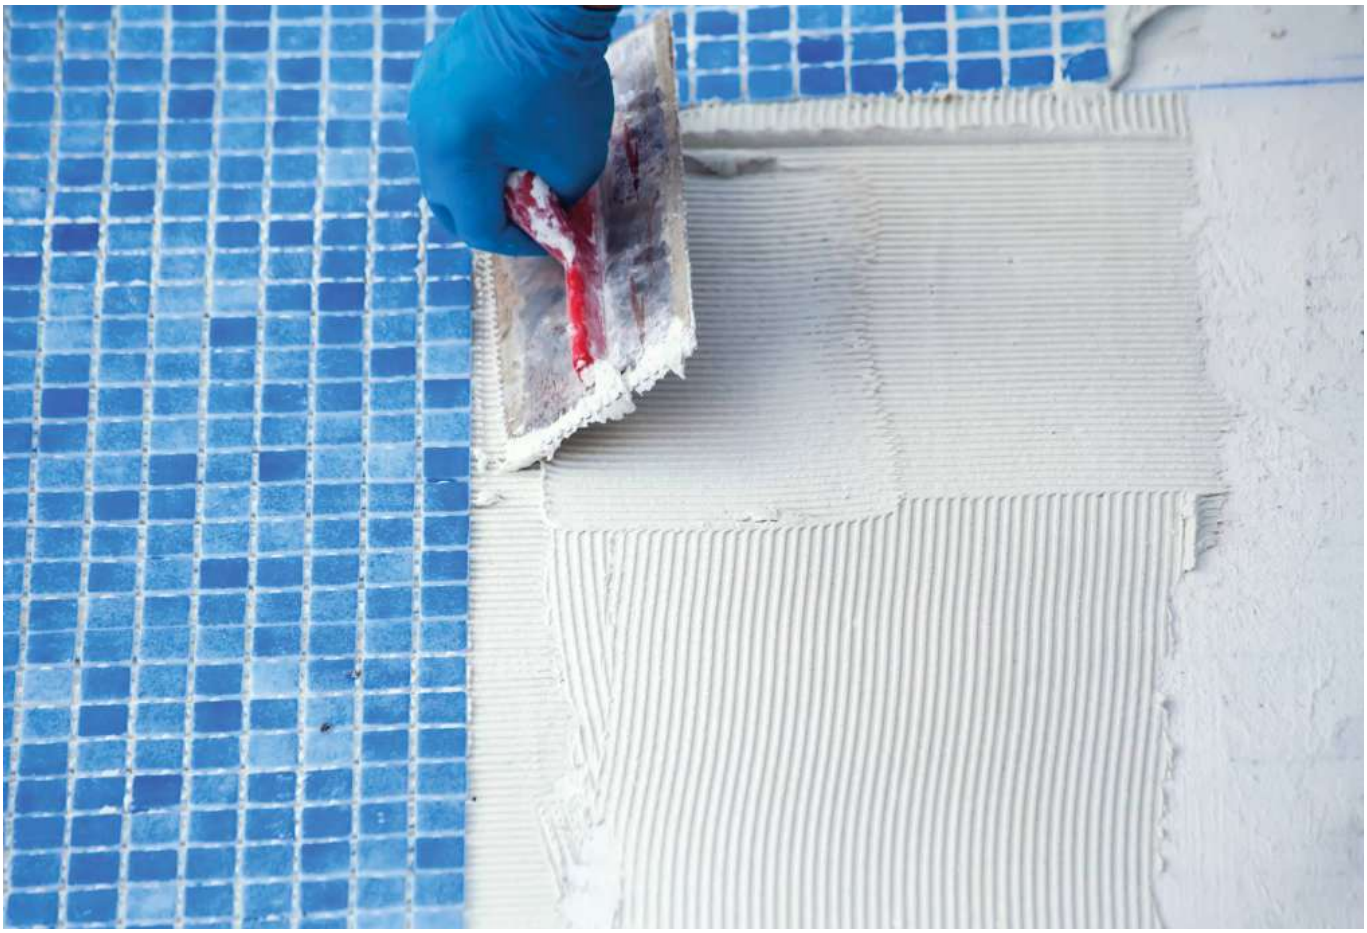

- For both internal & external floor and wall. For installation of ceramic/clay/vitrified / basalt /porecelain tile & all natural stone. Excellent for wet areas like swimming pools, sauna, water bodies and washrooms. KC Fixit XTREME adhesive mixed with water has pot life of 2 hours time to heavy traffic is 16-24 hours.
- Coverage-Approx 45 to 55 Sq.ft. per 20 kg Pack, Using 6mm x 6mm square notched trowel for a bed of 3mm.

(Actual coverage depends on substrate condition and method of application)

Property	Test Method	Requirement	Typical Values
Tensile Adhesion	**Dry Condition – Annex A** (Clause 5.1)	Minimum **1.5 N/mm²**	**1.5 – 1.65 N/mm²**
	Wet Condition – Annex A (Clause 5.1)	Minimum **1.00 N/mm²**	**1.10 – 1.20 N/mm²**
Shear Adhesion	**Dry Condition – Annex B** (Clause 5.2)	Minimum **1.5 N/mm²**	**1.45 – 1.55 N/mm²**
	Heat Ageing – Annex B (Clause 5.2)	Minimum **1.00 N/mm²**	**1.15 – 1.25 N/mm²**
	Wet Condition – Annex B (Clause 5.2)	Minimum **1.00 N/mm²**	**1.15 – 1.25 N/mm²**
Slip Resistance	**Slip Resistance – Annex E** (Clause 5.5)	**≤ 0.50 mm**	**0.25 – 0.35 mm**
	Wet Condition – Annex B (Clause 5.2)	Minimum **1.00 N/mm²**	**1.15 – 1.25 N/mm²**
	Transverse Deformation (Clause 5.6)	**≤ 2.5 mm / ≤ 5.0 mm**	**2.70 – 2.80 mm**

Compliance : **Complies to IS 15477:2019 – "Type 3T"/"Type 3T S1"**
Also complies with **EN C2TE / C2TE S1 Classification**

TYPE 4 | KC FIXIT FLEX
Tile Adhesive

C2TE S1
SLIP RESISTANT

Net Weight: **20 & 40 kg** Color: **Grey/White**

STRONG ADHESIVE | SLIP RESISTANT | WEATHER RESISTANT | EASY APPLICATION | NO SHRINKAGE

- For both internal & external floor and wall. For large format thin tiles on walls and floors. Can be used for highly diversified uses, material and surfaces. Best suited for elevation application Working properties at 27 C. KC Fixit FLEX adhesive mixed with water has pot life of 2 hours and time to heavy traffic is 16/24 hours.
- Coverage-Approx 45 to 55 Sq.ft. per 20 kg Pack, Using 6mm x 6mm square notched trowel for a bed of 3mm.

(Actual coverage depends on substrate condition and method of application)

Property	Test Method	Requirement	Typical Values
Tensile Adhesion	**Dry Condition – Annex A** (Clause 5.1)	Minimum **1.5 N/mm²**	**2.5 – 2.8 N/mm²**
	Wet Condition – Annex A (Clause 5.1)	Minimum **1.00 N/mm²**	**2.6 – 2.7 N/mm²**
Shear Adhesion	**Dry Condition – Annex B** (Clause 5.2)	Minimum **1.5 N/mm²**	**2.5 – 2.7 N/mm²**
	Heat Ageing – Annex B (Clause 5.2)	Minimum **1.00 N/mm²**	**1.9 – 2.1 N/mm²**
	Wet Condition – Annex B (Clause 5.2)	Minimum **1.00 N/mm²**	**1.9 – 2.1 N/mm²**
Slip Resistance	**Slip Resistance – Annex E** (Clause 5.5)	**≤ 0.50 mm**	**0.25 – 0.30 mm**
	Transverse Deformation	**≤ 2.5 mm / ≤ 5.0 mm**	**3.0 – 4.0 mm**

Compliance : **Complies to IS 15477:2019 – "Type 4TS1"**
Also complies with **EN C2TE S1 Classification**

TYPE 5 | KC FIXIT SUPERFLEX
Tile Adhesive

PU BASED

Net Weight: **4 kg** Color: **White**

STRONG ADHESIVE

SLIP RESISTANT

WEATHER RESISTANT

EASY APPLICATION

NO SHRINKAGE

- KC Fixit SuperFlex is a two component Epoxy PU based Tile Adhesive designed for installation of all types of tiles including engineered stones, glass tiles & metal tiles on all types of substrates which are highly deformable and expandable, absorbent and non-absorbent.
- Suitable For Interior/exterior Floors And Walls, All Types of Ceramic, Vitrified & Semi Vitrified tile Precast Terrazzo & Engineered stone, Glass & Metal Tiles, Quartz, Natural Stones & Marbles Slim Tiles, Composite/Neno/Artificial.
- Substrate like Metal Surfaces Wood & Plywood Rubber, pvc, wpc, Epoxy or PU resin based surface, Cement based Plaster/Concrete/ Screed.

(Actual coverage depends on substrate condition and method of application)

Property	Test Method	Requirement	Typical Values
Tensile Adhesion	**Dry Condition – Annex A** (Clause 5.1)	Minimum **2.00 N/mm²**	**3.40 – 3.90 N/mm²**
Shear Adhesion	**Dry Condition – Annex B** (Clause 5.2)	Minimum **6.00 N/mm²**	**6.40 – 7.50 N/mm²**
	Heat Ageing – Annex B (Clause 5.2)	Minimum **3.00 N/mm²**	**3.40 – 4.50 N/mm²**
Transverse Deformation	**Transverse Deformation** (Clause 5.6)	**≤ 0.5 mm**	**8.0 – 10.0 mm**

Compliance : **Complies to IS 15477:2019 –"Type 5TS2"**
Also complies with **EN R2T Classification**

GROUT | KC FIXIT TILE GROUT
CG1

CEMENTITIOUS POLYMER

Net Weight: **1 kg** Color: **Multi Color**

STRONG JOINT FILLING | STAIN RESISTANT | WATER RESISTANT | EASY APPLICATION | COLOR CONSISTENCY

- Water-resistant, non-cracking & non-shrink polymer-modified cementitious tile joint filler/grout designed for grouting glazed wall tiles, mosaics, vitrified & fully vitrified tiles, floor tiles, industrial floor tiles etc. Tile grout effectively fills the gaps and levels it self to give hard wearing and non dusting tile joints. Tile grout firmly holds the tiles together to give a long life to the tiles and can be used for 1mm to 3mm ioint width max.
- For improved performance, mix the tile admix to tile grout. Cementitious polymer tile grout is available in both sanded & unsanded form.

  (Actual coverage depends on substrate condition and method of application)

Property	Test Method	Requirement	Typical Values
Abrasion Resistance	ISO 13007-4: Clause 4.4; EN 12808-2	**≤ 2000 mm³**	**1300 – 1600 mm³**
Flexural Strength (Standard Condition)	ISO 13007-4: Clause 4.1.3; EN 12808-3	**≥ 2.5 N/mm²**	**3.0 – 3.5 N/mm²**
Compressive Strength (Standard Condition)	ISO 13007-4: Clause 4.1; EN 12808-4	**≥ 15 N/mm²**	**20 – 22 N/mm²**
Shrinkage	ISO 13007-4: Clause 4.3; EN 12808-4	**< 3 mm/m**	**2.00 – 2.22 mm/m**
Water Absorption (30 min.)	ISO 13007-4: Clause 4.2; EN 12808-5	**≤ 5.0 g**	**2.5 – 3.0 g**

Compliance : **Conforms to EN 13888**
IS 17190:2020 CG1

EPOXY | KC FIXIT EPOXYSHIELD 3K

EG-100 / EG-200

THREE COMPONENT HIGH PERFORMANCE

Net Weight: **1 & 5 kg** Color: **Multi Color**

STRONG JOINT FILLING | STAIN RESISTANT | WATER RESISTANT | EASY APPLICATION | COLOR CONSISTENCY

- Hygienic, easy to clean, water & shock resistant 3 component epoxy resin based colour fast stain free grout with good bond strength for interior as well as covered exterior floor and wall joints. For all types of ceramic tile, vitreous, semi- vitreous tile, glass mosaic tiles, precast terrazzo, engineered stone floors & natural stones.
- Recommended for institutional and commercial kitchens, cafeterias, residential facilities, rest rooms, schools and wet areas like swimming pools, sauna, water bodies and wash rooms.

(Actual coverage depends on substrate condition and method of application)

Property	Test Method	Requirement	Typical Values
Abrasion Resistance	ISO 13007-4: Clause 4.4; EN 12808-2	**≤ 250 mm²**	**Pass**
Flexural Strength (Under Standard Condition)	ISO 13007-4: Clause 4.1.3; EN 12808-3	**≥ 30 N/mm²**	**38–40 N/mm²**
Compressive Strength (Under Standard Condition)	ISO 13007-4: EN 12808-3	**≥ 45 N/mm²**	**55–57 N/mm²**
Shrinkage	ISO 13007-4: Clause 4.3 : EN 12808-4	**< 1.5 mm/m**	**0.6–0.8 mm/m**
Water Absorption (after 240 min.)	ISO 13007-4: Clause 4.2; EN 12808-5	**≤ 0.1 g**	**0.015–0.040 g**

Compliance : **Polymer Tile Grout Conforms to EN 13888, IS 17190:2020 RG2**

PLASTER

KC FIXIT PLASTO FIX
Ready mix plaster

POLYMER-MODIFIED READY MIX PLASTER

Net Weight: **40 kg** Color: **Grey**

SMOOTH FINISH | CRACK RESISTANT | EXCELLENT COVERAGE | EASY APPLICATION | DURABLE & LONG-LASTING

- Here is the exact extracted content from the attached brochure image (Ready Mix Plaster – KC Fixit):
- The substrate needs to be cleaned & made free from grease & loose particles. Then dampen the surface with clean water.
- Add Ready Mix Plaster to potable water (this will be for 5–15 mins). Recommended mix 15–17% water.
- Allow Mixture to stand for 5 mins. & then remix again for 2 mins.
- Apply plaster to the substrate, using the usual plastering tools (trowel or wooden float if required).
- Apply aluminium level strip from bottom to top direction followed by left to right (let it drain if required).
- Plain plaster wall ready for wall putty application & Post 24 hours curing is recommended for 7 days. (Do Not Add Extra Cement Or Sand With Admix)

- **Key Features:**

- Reduces rebounding loss
- Highly durable plaster
- Cuts repair & maintenance cost
- Time-saving
- Cost-effective
- Excellent work ability
- Pre-mixed, only water to be added
- RMP can be used for interior as well as exterior walls

MORTAR

KC FIXIT BLOCK FIX
Block Jointing Mortar

AAC/CLC
BLOCKS

Net Weight: **40 kg** Color: **Grey**

STRONG ADHESIVE | HIGH LOAD BEARING | CRACK RESISTANT | EASY APPLICATION | LOW MATERIAL WASTAGE

- Polymer modified adhesive for masonry building applications, optimum for the adhesion of AAC blocks having high shear bond strength.
- KC Fixit BLOCK FIX replaces traditional method of 20-25mm thickness with 3 - 6mm thickness of KC Fixit BLOCK FIX.
- Improved efficiency: With its reduced thickness requirement, it streamlines the construction process, making it more efficient and cost-effective.
- High shear bond strength: Ensuring secure and reliable adhesion of AAC blocks, providing structural stability to your building.

- **Coverage:** Approx 70-80 sq.ft./40kg at 2-3mm bed thickness
- **Shelf Life:** 12 months
- **Standard:** Conforms to ASTM C: 1660-10

LATEX | KC FIXIT SBR
Latex Pro

BONDING POLYMER ADDITIVES

Pkg: 1L-5L-10L **Cans** Color: **Milky White**

- HIGH BOND STRENGTH
- IMPROVED FLEXIBILITY
- WATER RESISTANT
- CRACK PREVENTION
- BETTER WORKABILITY

Multi-Purpose Additive for Repair, Waterproofing & Strengthening

- Latex Bond-A milky white latex based in a modified styrene butadiene (SBR) co-polymer emulsion for waterproofing & bond ing in many civil engineering applications.
- SBR Latex Bond for Cementitious Water proofing & Repair Polymer conforming to ASTMC 1059 Type II, EN 121 90.
- For concrete repairs in combination with cement : Spalled concrete of floors, columns, beams, slabs, parapets etc.
- For waterproofing: As a strong primer & as an additive in the mortar -small roof terraces, sunken portions of toilets bathrooms, lift pits & balconies .
- As a bond coat: For multi layer plaster, serves as a bonding agent & also as a waterproof barrier, for bonding of new concrete to old concrete, masonry stone work & plastering.

WATER PROOFING

KC FIXIT CONCRETESEAL (LW+)

LIQUID WATERPROOFING

Pkg: 1L-5L-10L **Cans** Color: **Brownish Liquid**

STRONG ADHESIVE | SLIP RESISTANT | WEATHER RESISTANT | EASY APPLICATION | NO SHRINKAGE

INTEGRAL WATERPROOFING:

- **Product Description & Features:**
  KC Fixit Concreteseal protects structures from internal seepage, external water ingress, expansion cracks and climate-induced deterioration.
- Integral Waterproofing Liquid Admixture for concrete and mortar confirming to IS 2645:2003, IS 4031:1988, IS 6925:1973
- For waterproofing of concrete and mortar used in RCC beams, basements, roof slabs and screeds.
- For water tanks & water retaining structures, external plastering, bathrooms and balconies, sumps and drains.
- **Product Purpose**: Used with plaster / concrete to reduce porosity, seepage and water ingress.
- **Dosage is 200ml for 50Kg cement bag**

- Improves workability with cement
- Saves Water Usage
- Saves cement usage

Concrete | Basement walls | Plaster | Water tanks | Roof slab

WATER PROOFING

KC FIXIT AQUACOAT
2K Component

CEMENTITIOUS WATERPROOFING

Component A: **Gray Powder** (10kg)
Component B: **White Liquid** (5 kg)

- CRACK BRIDGING
- HIGH WATER RESISTANCE
- WEATHER RESISTANT
- EASY APPLICATION
- LONG-LASTING PROTECTION

ELASTOMERIC WATERPROOF & PROTECTIVE COATING :

- **Product Description & Features:**
  Umbrella Protect - Two component polymer modified flexible and elastic cementitious waterproof cum anti-carbonation coating to be applied on sound substrates for extremely tough & durable waterproof render.
- 2K Umbrella Protect for Elastomeric Waterproof & Protective Coating confirming to ASTM D 4541, ASTM D 836, ASTM D 1640.
- Best suited for all structures to be waterproofed & protected against ingress of moisture.
- **Product Purpose**: Acrylic liquid + cementitious powder combination for flexible waterproofing.

· Ideal Applications ·

Bathrooms | Basement walls | Balconies | Water tanks | Terraces

KC Fixit
FIX IT RIGHT, FIX IT ONCE

Advanced
TILE
Installation &
WATERPROOFING
Solutions

Address
KC FIXIT LLP, Savani Brothers, Upper Ground Floor, FP-455/B, Near Anath Ashram, Katargam main road, Surat 395004

Customer Care
0261-2539755/56/57

Website
www.kcfixit.com

E-mail
contact@kcfixit.com