RSLogix Micro Project Report

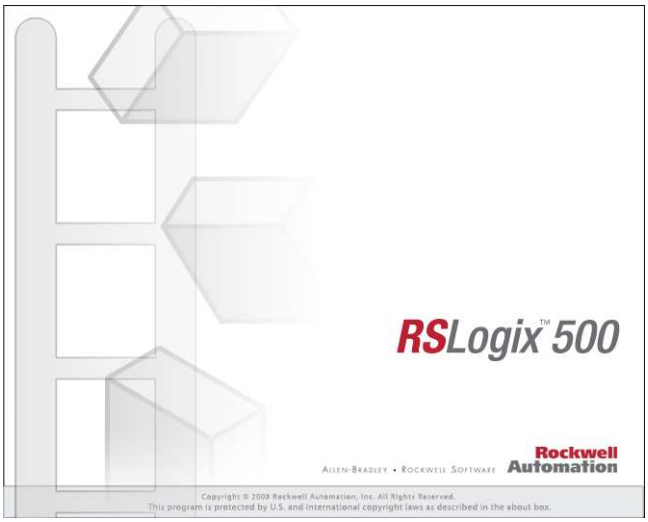

Processor Information

Processor Type: Bul.1763 MicroLogix 1100 Series B

Processor Name: UNTITLED

Total Memory Used: 159 Instruction Words Used - 55 Data Table Words Used

Total Memory Left: 6497 Instruction Words Left

Program Files: 3

Data Files: 9

Program ID: addb

I/O Configuration

0	Bul.1763	MicroLogix 1100 Series B
1		
2		
3		
4		

Channel Configuration

CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Edit Resource/Owner Timeout: 60
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Passthru Link ID: 1
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Write Protected: No
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Comms Servicing Selection: Yes
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Message Servicing Selection: Yes
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 1st AWA Append Character: \d
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 2nd AWA Append Character: \a

   Source ID: 1 (decimal)
   Baud: 19200
   Parity: NONE
   Control Line : No Handshaking
   Error Detection: CRC
   Embedded Responses: Auto Detect
   Duplicate Packet Detect: Yes
   ACK Timeout(x20 ms): 50
   NAK Retries: 3
   ENQ Retries: 3

CHANNEL 1 (SYSTEM) - Driver: Ethernet
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Edit Resource/Owner Timeout: 60
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Passthru Link ID: 1
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Write Protected: No
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Comms Servicing Selection: Yes
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Message Servicing Selection: Yes

   Hardware Address: 00:00:00:00:00:00
   IP Address: 0.0.0.0
   Subnet Mask: 0.0.0.0
   Gateway Address: 0.0.0.0
   Msg Connection Timeout (x 1mS): 15000
   Msg Reply Timeout (x mS): 3000
   Inactivity Timeout (x Min): 30
   Bootp Enable: Yes
   Dhcp Enable No
   SNMP Enable: No
   HTTP Enable: Yes
   Auto Negotiate Enable: Yes
   Port Speed Enable: 10/100 Mbps Full Duplex/Half Duplex
   Contact:
   Location:

Program File List

Name	Number	Type	Rungs	Debug	Bytes
[SYSTEM]	0	SYS	0	No	0
	1	SYS	0	No	0
	2	LADDER	12	No	382

Data File List

Name	Number	Type	Scope	Debug	Words	Elements	Last
OUTPUT	0	O	Global	No	12	4	O:3
INPUT	1	I	Global	No	18	6	I:5
STATUS	2	S	Global	No	0	66	S:65
BINARY	3	B	Global	No	1	1	B3:0
TIMER	4	T	Global	No	3	1	T4:0
COUNTER	5	C	Global	No	12	4	C5:3
CONTROL	6	R	Global	No	3	1	R6:0
INTEGER	7	N	Global	No	4	4	N7:3
FLOAT	8	F	Global	No	2	1	F8:0

PROJEKTBESCHREIBUNG:In diesem Projekt wird ein Steuerungssystem entwickelt, das die Laufzeit einer Hauptanlage erfasst. Sobald die Anlage eingeschaltet wird, beginnt der Zähler, die Betriebsdauer in Sekunden, Minuten, Hunderten und Tausenden von Stunden zu messen und in den Speicherregistern N7:0 bis N7:3 abzulegen. Zusätzlich gibt es eine Reset-Taste (B3:0/0), mit der der gesamte Zählerstand auf null zurückgesetzt werden kann, um eine neue Messung zu starten. Die Steuerung erfolgt über ein Einschalttaste(I:0/0). Solche Systeme sind essenziell, da Betriebsstunden oft als Grundlage für Wartung, Inspektion oder Garantieansprüche dienen.

0000

EINSCHALTTASTE EINGANG
I:0
0
Bul.1763

SYSTEM EINGESCHALTET
B3:0
1

0001

SYSTEM EINGESCHALTET
B3:0
1

SEKUNDENZÄHLER
RTO
Retentive Timer On — EN
Timer T4:0
Time Base 1.0
Preset 60<
Accum 0<
DN

0002

SEKUNDENZÄHLER
T4:0
EN

SEKUNDENZÄHLER
NEQ
Not Equal
Source A T4:0.ACC 0<
Source B 60 60<

SEKUNDEN
MOV
Move
Source T4:0.ACC 0<
Dest N7:0 0<

0003

SEKUNDENZÄHLER
T4:0
DN

MINUTENZÄHLER
CTU
Count Up — CU
Counter C5:1
Preset 60<
Accum 0<
DN

SEKUNDEN
MOV
Move
Source 0 0<
Dest N7:0 0<

SEKUNDENZÄHLER
T4:0
RES

0004

MINUTENZÄHLER
NEQ
Not Equal
Source A C5:1.ACC 0<
Source B 60 60<

MINUTEN
MOV
Move
Source C5:1.ACC 0<
Dest N7:1 0<

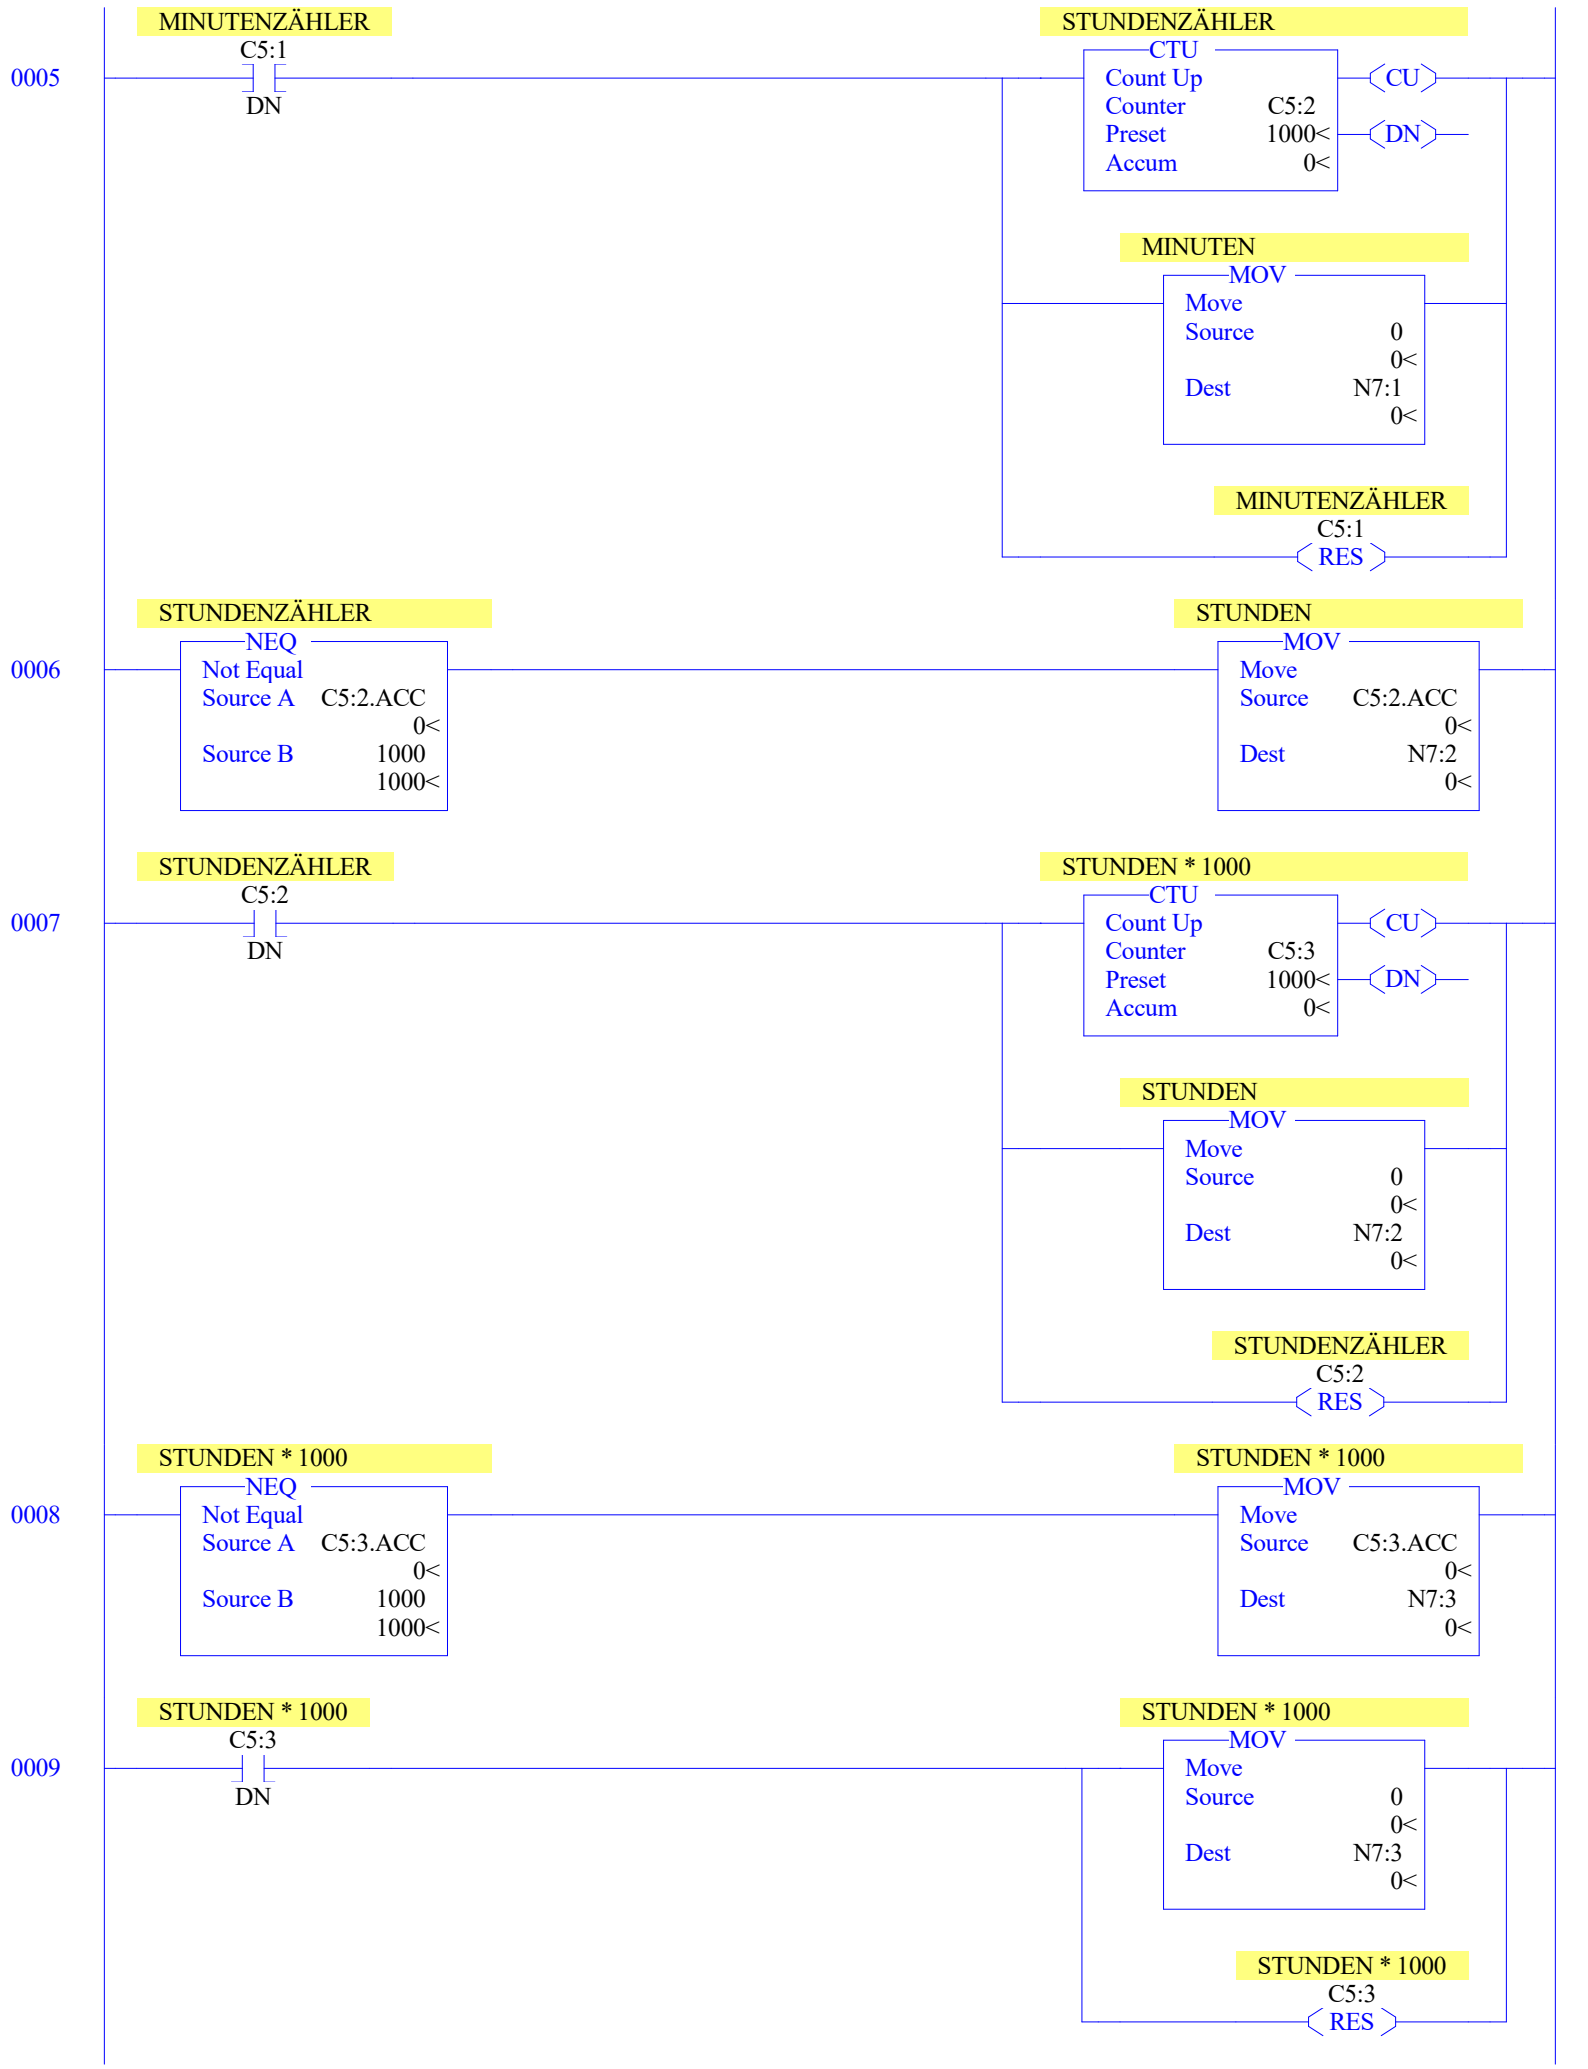
0005
MINUTENZÄHLER
C5:1
DN
STUNDENZÄHLER
CTU
Count Up
Counter C5:2
Preset 1000<
Accum 0<
CU
DN
MINUTEN
MOV
Move
Source 0
0<
Dest N7:1
0<
MINUTENZÄHLER
C5:1
RES
0006
STUNDENZÄHLER
NEQ
Not Equal
Source A C5:2.ACC
0<
Source B 1000
1000<
STUNDEN
MOV
Move
Source C5:2.ACC
0<
Dest N7:2
0<
0007
STUNDENZÄHLER
C5:2
DN
STUNDEN * 1000
CTU
Count Up
Counter C5:3
Preset 1000<
Accum 0<
CU
DN
STUNDEN
MOV
Move
Source 0
0<
Dest N7:2
0<
STUNDENZÄHLER
C5:2
RES
0008
STUNDEN * 1000
NEQ
Not Equal
Source A C5:3.ACC
0<
Source B 1000
1000<
STUNDEN * 1000
MOV
Move
Source C5:3.ACC
0<
Dest N7:3
0<
0009
STUNDEN * 1000
C5:3
DN
STUNDEN * 1000
MOV
Move
Source 0
0<
Dest N7:3
0<
STUNDEN * 1000
C5:3
RES

LAD 2 - --- Total Rungs in File = 12

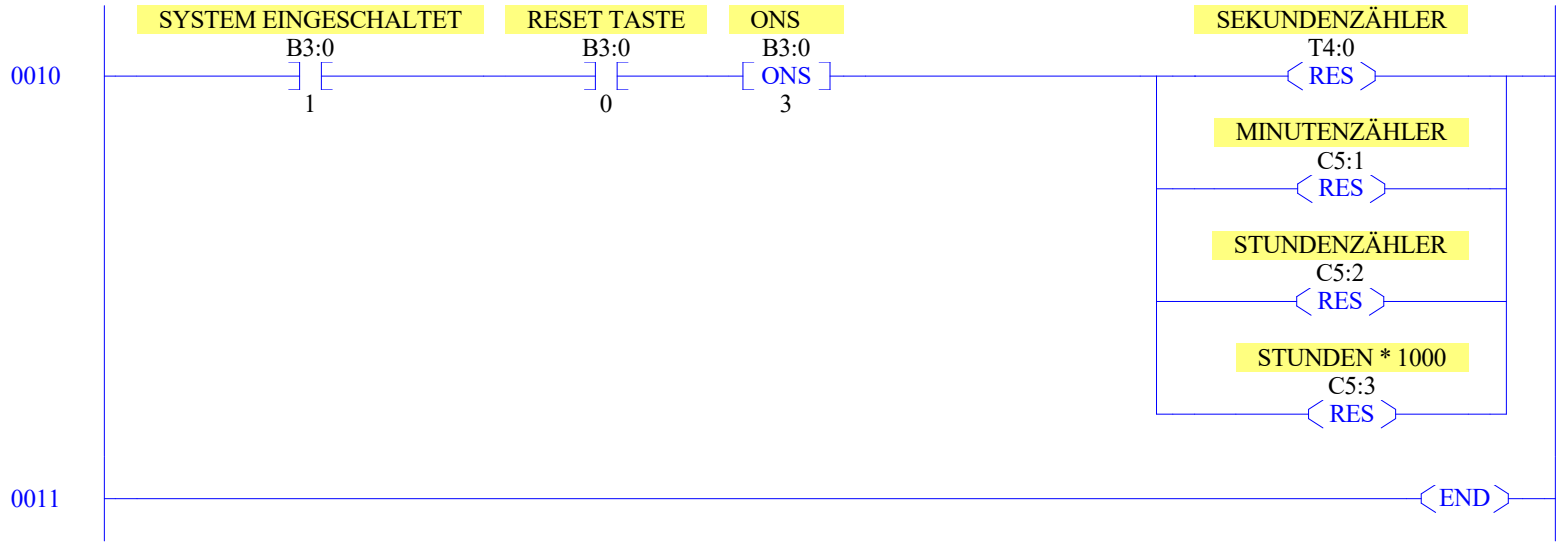

Data File O0 (bin) -- OUTPUT

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
O:0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
O:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
O:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
O:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B

Data File I1 (bin) -- INPUT

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
I:0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
I:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
I:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
I:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
I:0.4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B-Analo
I:0.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B-Analo

Data File S2 (hex) -- STATUS

Main

Processor Mode S:1/0 - S:1/4 = Remote Program Mode
On Power up Go To Run (Mode Behavior) S:1/12 = 0
First Pass S:1/15 = No
Free Running Clock S:4 = 0000-0000-0000-0000

Proc

OS Catalog Number S:57 = 1100
OS Series S:58 = A
OS FRS S:59 =
Processor Catalog Number S:60 =
Processor Series S:61 = A
Processor FRN S:62 =
User Program Type S:63 = 8001h
Compiler Revision Number S:64 =

Scan Times

Maximum (x10 ms) S:22 = 0
Watchdog (x10 ms) S:3 (high byte) = 10
Last 100 uSec Scan Time S:35 = 0
Scan Toggle Bit S:33/9 = 0

Math

Math Overflow Selected S:2/14 = 0
Overflow Trap S:5/0 = 0
Carry S:0/0 = 0
Overflow S:0/1 = 0
Zero Bit S:0/2 = 0
Sign Bit S:0/3 = 0
Math Register (lo word) S:13 = 0
Math Register (high word) S:14-S:13 = 0
Math Register (32 Bit) S:14-S:13 = 0

Chan 0

Processor Mode S:1/0- S:1/4 = Remote Program Mode
Node Address S:15 (low byte) = 0
Baud Rate S:15 (high byte) = ?
Channel Mode S:33/3 = 0
Comms Active S:33/4 = 0
Incoming Cmd Pending S:33/0 = 0
Msg Reply Pending S:33/1 = 0
Outgoing Msg Cmd Pending S:33/2 = 0

Debug

Suspend Code S:7 = 0
Suspend File S:8 = 0

Errors

Fault Override At Power Up S:1/8 = 0
Startup Protection Fault S:1/9 = 0
Major Error Halt S:1/13 = 0
Overflow Trap S:5/0 = 0
Control Register Error S:5/2 = 0
Major Error Executing User Fault Rtn. S:5/3 = 0
Battery Low S:5/11 = 0
Input Filter Selection Modified S:5/13 = 0
ASCII String Manipulation error S:5/15 = 0
Fault Routine S:29 = 0
Major Error S:6 = 0h
Error Description:

Protection

Deny Future Access S:1/14 = No
Data File Overwrite Protection Lost S:36/10 = False

Mem Module

Memory Module Loaded On Boot S:5/8 = 0
Password Mismatch S:5/9 = 0
Load Memory Module On Memory Error S:1/10 = 0
Load Memory Module Always S:1/11 = 0
On Power up Go To Run (Mode Behavior) S:1/12 = 0
Program Compare S:2/9 = 0
Data File Overwrite Protection Lost S:36/10 = 0

Forces

Forces Enabled S:1/5 = Yes
Forces Installed S:1/6 = No

Data File B3 (bin) -- BINARY

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	(Symbol)	Description
B3:0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

Data File T4 -- TIMER

Offset	EN	TT	DN	BASE	PRE	ACC	(Symbol)	Description
T4:0	0	0	0	1.0 sec	60	0	SEKUNDENZÄHLER	

Data File C5 -- COUNTER

Offset	CU	CD	DN	OV	UN	UA	PRE	ACC	(Symbol) Description
C5:0	0	0	0	0	0	0	60	0	SEKUNDENZÄHLER
C5:1	0	0	0	0	0	0	60	0	MINUTENZÄHLER
C5:2	0	0	0	0	0	0	1000	0	STUNDENZÄHLER
C5:3	0	0	0	0	0	0	1000	0	STUNDEN * 1000

Data File R6 -- CONTROL

Offset	EN	EU	DN	EM	ER	UL	IN	FD	LEN	POS	(Symbol)	Description
R6:0	0	0	0	0	0	0	0	0	0	0		

Data File N7 (dec) -- INTEGER

Offset	0	1	2	3	4	5	6	7	8	9
N7:0	0	0	0	0						

Data File F8 -- FLOAT

Offset	0	1	2	3	4
F8:0	0				

Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group	Dev. Code	ABV	BI
B3:0/0			RESET TASTE				
B3:0/1			SYSTEM EINGESCHALTET				
B3:0/2			ONS				
B3:0/3			ONS				
C4:0			SEKUNDENZÄHLER				
C5:0			SEKUNDENZÄHLER				
C5:0/DN							
C5:0/CU							
C5:1			MINUTENZÄHLER				
C5:1/DN							
C5:2			STUNDENZÄHLER				
C5:3			STUNDEN * 1000				
I:0/0			EINSCHALTTASTE EINGANG				
N7:0			SEKUNDEN				
N7:1			MINUTEN				
N7:2			STUNDEN				
N7:3			STUNDEN * 1000				
S:0			Arithmetic Flags				
S:0/0			Processor Arithmetic Carry Flag				
S:0/1			Processor Arithmetic Underflow/ Overflow Flag				
S:0/2			Processor Arithmetic Zero Flag				
S:0/3			Processor Arithmetic Sign Flag				
S:1			Processor Mode Status/ Control				
S:1/0			Processor Mode Bit 0				
S:1/1			Processor Mode Bit 1				
S:1/2			Processor Mode Bit 2				
S:1/3			Processor Mode Bit 3				
S:1/4			Processor Mode Bit 4				
S:1/5			Forces Enabled				
S:1/6			Forces Present				
S:1/7			Comms Active				
S:1/8			Fault Override at Powerup				
S:1/9			Startup Protection Fault				
S:1/10			Load Memory Module on Memory Error				
S:1/11			Load Memory Module Always				
S:1/12			Load Memory Module and RUN				
S:1/13			Major Error Halted				
S:1/14			Access Denied				
S:1/15			First Pass				
S:2/0			STI Pending				
S:2/1			STI Enabled				
S:2/2			STI Executing				
S:2/3			Index Addressing File Range				
S:2/4			Saved with Debug Single Step				
S:2/5			DH-485 Incoming Command Pending				
S:2/6			DH-485 Message Reply Pending				
S:2/7			DH-485 Outgoing Message Command Pending				
S:2/15			Comms Servicing Selection				
S:3			Current Scan Time/ Watchdog Scan Time				
S:4			Time Base				
S:5/0			Overflow Trap				
S:5/2			Control Register Error				
S:5/3			Major Err Detected Executing UserFault Routine				
S:5/4			M0-M1 Referenced on Disabled Slot				
S:5/8			Memory Module Boot				
S:5/9			Memory Module Password Mismatch				
S:5/10			STI Overflow				
S:5/11			Battery Low				
S:6			Major Error Fault Code				
S:7			Suspend Code				
S:8			Suspend File				
S:9			Active Nodes				
S:10			Active Nodes				
S:11			I/O Slot Enables				
S:12			I/O Slot Enables				
S:13			Math Register				
S:14			Math Register				
S:15			Node Address/ Baud Rate				
S:16			Debug Single Step Rung				
S:17			Debug Single Step File				
S:18			Debug Single Step Breakpoint Rung				
S:19			Debug Single Step Breakpoint File				
S:20			Debug Fault/ Powerdown Rung				
S:21			Debug Fault/ Powerdown File				
S:22			Maximum Observed Scan Time				
S:23			Average Scan Time				
S:24			Index Register				
S:25			I/O Interrupt Pending				
S:26			I/O Interrupt Pending				
S:27			I/O Interrupt Enabled				
S:28			I/O Interrupt Enabled				
S:29			User Fault Routine File Number				
S:30			STI Setpoint				
S:31			STI File Number				
S:32			I/O Interrupt Executing				
S:33			Extended Proc Status Control Word				
S:33/0			Incoming Command Pending				
S:33/1			Message Reply Pending				
S:33/2			Outgoing Message Command Pending				
S:33/3			Selection Status User/DF1				

Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group	Dev. Code	ABV	BI
S:33/4			Communicat Active				
S:33/5			Communicat Servicing Selection				
S:33/6			Message Servicing Selection Channel 0				
S:33/7			Message Servicing Selection Channel 1				
S:33/8			Interrupt Latency Control Flag				
S:33/9			Scan Toggle Flag				
S:33/10			Discrete Input Interrupt Reconfigur Flag				
S:33/11			Online Edit Status				
S:33/12			Online Edit Status				
S:33/13			Scan Time Timebase Selection				
S:33/14			DTR Control Bit				
S:33/15			DTR Force Bit				
S:34			Pass-thru Disabled				
S:34/0			Pass-Thru Disabled Flag				
S:34/1			DH+ Active Node Table Enable Flag				
S:34/2			Floating Point Math Flag Disable,Fl				
S:35			Last 1 ms Scan Time				
S:36			Extended Minor Error Bits				
S:36/8			DII Lost				
S:36/9			STI Lost				
S:36/10			Memory Module Data File Overwrite Protection				
S:37			Clock Calendar Year				
S:38			Clock Calendar Month				
S:39			Clock Calendar Day				
S:40			Clock Calendar Hours				
S:41			Clock Calendar Minutes				
S:42			Clock Calendar Seconds				
S:43			STI Interrupt Time				
S:44			I/O Event Interrupt Time				
S:45			DII Interrupt Time				
S:46			Discrete Input Interrupt- File Number				
S:47			Discrete Input Interrupt- Slot Number				
S:48			Discrete Input Interrupt- Bit Mask				
S:49			Discrete Input Interrupt- Compare Value				
S:50			Processor Catalog Number				
S:51			Discrete Input Interrupt- Return Number				
S:52			Discrete Input Interrupt- Accumulat				
S:53			Reserved/ Clock Calendar Day of the Week				
S:55			Last DII Scan Time				
S:56			Maximum Observed DII Scan Time				
S:57			Operating System Catalog Number				
S:58			Operating System Series				
S:59			Operating System FRN				
S:61			Processor Series				
S:62			Processor Revision				
S:63			User Program Type				
S:64			User Program Functional Index				
S:65			User RAM Size				
S:66			Flash EEPROM Size				
S:67			Channel 0 Active Nodes				
S:68			Channel 0 Active Nodes				
S:69			Channel 0 Active Nodes				
S:70			Channel 0 Active Nodes				
S:71			Channel 0 Active Nodes				
S:72			Channel 0 Active Nodes				
S:73			Channel 0 Active Nodes				
S:74			Channel 0 Active Nodes				
S:75			Channel 0 Active Nodes				
S:76			Channel 0 Active Nodes				
S:77			Channel 0 Active Nodes				
S:78			Channel 0 Active Nodes				
S:79			Channel 0 Active Nodes				
S:80			Channel 0 Active Nodes				
S:81			Channel 0 Active Nodes				
S:82			Channel 0 Active Nodes				
S:83			DH+ Active Nodes				
S:84			DH+ Active Nodes				
S:85			DH+ Active Nodes				
S:86			DH+ Active Nodes				
T4:0			SEKUNDENZÄHLER				

Instruction Comment Database

Address	Instruction	Description

Symbol Group Database

Group_Name Description