# CHANGLIN 906A


国机重工集团国际装备有限公司

**SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.**

Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC:213136

Tel:86-519-86781288 86752400

Fax:86-519-86781387

Https://www.cn-changlin.com/

E-mail:sales2@changlin.com.cn


CHANGLIN

# CHANGLIN 906A

Multi-function Compact Wheel Loader

| TIPPING LOAD | ENGINE POWER | SPEED | FLOW RATE | LIFT HEIGHT |
|---|---|---|---|---|
| 1350 kg | 25 hp | 19 km/h | 69 l/min | 2,84 m |

CHANGLIN is the company focusing on designing and manufacturing power machinery products with more 65 years history, long terms cooperating with related famous companies in Europe, Japan. CHANGLIN multi function compact telescopic loader is one kind of actual work master, it's designed for utility purpose by changing different kinds of attachments while lowering costs, widely used forfarming, estate and property maintenance, construction, landscaping, groundcare, forestry and more other working sites.

# CHANGLIN 906A

Multi-function Compact Wheel Loader

- **Engine**
  - Kubota D1105（18.2KW/25 hp）, 3 cylinder, water cooling, diesel engine. Compliant with Europe Stage V and USA Tier 4 Emission Standard Level.

- **Italian Bondioli & Pavesi hydraulic driving pump system**

POWERED BY KUBOTA

# Characteristics of *CHANGLIN 906A*
# Multi Function Compact Loader

- **Hydrostatic 4WD system**
  - ➢ Radial plunger high efficiency and heavy duty wheel motors adopted

- **Chassis**
  - ➢ Articulated design allows precise driving or working in tight situations

- **Drive Speed**
  - ➢ Two drive speed areas (max. drive speed 19km/h)

- **Certificate**
  - ➢ CE+ROPS/FOPS certified

- **Excellent value facilities as standard supply**
  - ➢ General bucket
  - ➢ Boom leveling
  - ➢ Engine heater
  - ➢ Hydraulic attachment coupling plate
  - ➢ Anti-slip valve



- **Main Boom**
  - ➢ Telescopic boom offers more lift height and outreach.
    Double “H” off-center boom structure offers excellent visibility on attachment and working site.



- **Hydraulic multi connector for hydraulic attachments.**

- **Dashboard**
  - ➢ LCD display instrument with programmed service ( tachometer, hour meter, fuel gauge, light indicators and other 17 indicators).

- **Excellent value facilities as standard supply**
  - ➢ Boom leveling.

- **Excellent value facilities as standard supply**
  - ➢ General bucket.



- **Excellent value facilities as standard supply**
  - ➢ Hydraulic attachment coupling plate

- **Options**
  - ➢ Cabin
    Consists of windscreen （equipped with wiper）, right and rear window and roof protector

- **Options**
  - ➢ Working Light
    Led (12w Lumen: 1000Lm )

- **Excellent value facilities as standard supply**
  - ➢ Engine heater.

# CHANGLIN 906A

## Technical specifications

| | |
|---|---|
| **Engine data** | |
| Manufacturer | Kubota |
| Engine type | D1105 |
| Cylinder | 3 |
| Rated Engine Power | 18.2Kw (25hp)/3000 rpm |
| Max Torque | 70.4Nm/2200 rpm |
| Displacement | 1123 cm³ |
| Cooling system | Water |
| Emissions standard level | Stage V /GB4/Tier4 Final |
| **Electrical system** | |
| Operating voltage | 12 V |
| Battery | 45 Ah |
| Alternator | 60 A |
| **Weights and tipping load** | |
| Operating weight | 1680 kg |
| Tipping load without attachment - machine straight and telescopic boom minimum | 1350 kg |
| Tipping load without attachment - machine straight and telescopic boom maximum | 750 kg |
| Tipping load without attachment - machine articulated and telescopic boom minimum | 1000 kg |
| Tipping load without attachment - machine articulated and telescopic boom maximum | 650 kg |
| **Vehicle data** | |
| Ground speed | 0 - 19 km/h |
| Speed stages | 2 |
| First speed | 0-9 km/h |
| Second speed | 9-19 km/h |
| Fuel tank capacity | 25L |
| Hydraulic oil tank capacity | 40L |
| **Hydraulic system** | |
| Maximum pressure of travel system | 350 bar |
| Maximum steering hydraulic pressure | 175 bar |
| Maximum working hydraulic pressure | 200 bar |
| Displacement of plunger pump | 23 ml/r |
| Displacement of gear pump | 14 ml/r |
| Displacement of plunger motor | 398 ml/r |
| **Drive** | |
| Type of drive | Hydraulic |
| Traction drive | Diesel engine |
| **Noise values** | |
| Guaranteed sound power level LwA | 101 dB(A) |
| Specified sound pressure level LpA | 88 dB(A) |

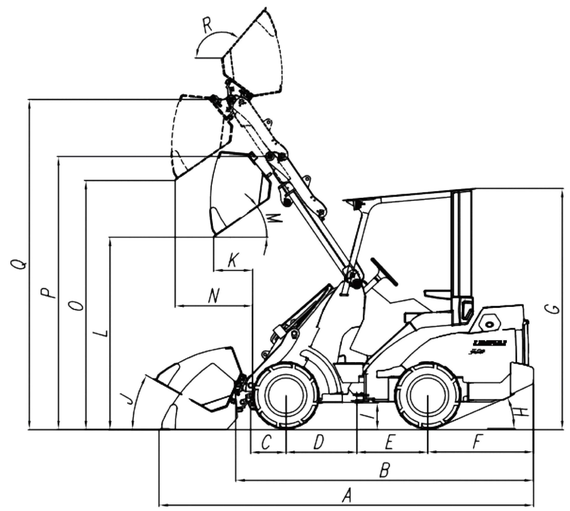


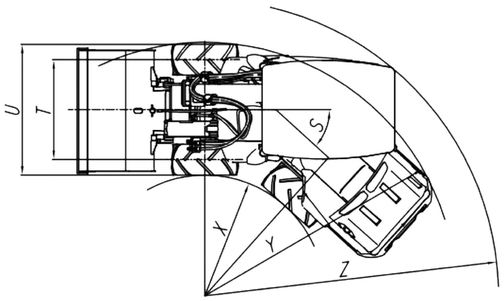


## Dimensions

| | | |
|---|---|---|
| A | Total length | 3275 mm |
| B | Total length (without bucket) | 2605 mm |
| C | Axle middle to bucket pivot pin | 320 mm |
| D | Distance between front wheel center and hinge center | 618 mm |
| E | Distance between rear wheel center and hinge center | 618 mm |
| F | Rear overhang | 920 mm |
| G | Height to top of overhead guard fixed | 2075 mm |
| H | Departure angle | 23 ° |
| I | Ground clearance | 200 mm |
| J | Rollback angle (on the ground) | 30 ° |
| K | Dumping reach （Telescopic boom minimum） | 340 mm |
| L | Dumping clearance （Telescopic boom minimum） | 1650 mm |
| M | Dumping angle | 35 ° |
| N | Dumping reach （Telescopic boom maximum） | 675 mm |
| O | Dumping clearance （Telescopic boom maximum） | 2145 mm |
| P | Maximum pin height （Telescopic boom minimum） | 2350 mm |
| Q | Maximum pin height （Telescopic boom maximum） | 2840 mm |
| R | Maximum rollback angle | 130 ° |
| S | Inclination angle | 42 ° |
| T | Track width | 865 mm |
| U | Total width | 1130 mm |
| X | Inside turning radius | 1045 mm |
| Y | Radius at the outer edge | 2195 mm |
| Z | Maximum radius external | 2560 mm |