CHANGLIN 906B

国机重工集团国际装备有限公司
SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.
Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China
PC:213136
Tel:86-519-86781288 86752400
Fax:86-519-86781387
Https://www.cn-changlin.com/
E-mail:sales2@changlin.com.cn

The specifications in the catalogue are only for reference and subject to change without any notice.

CHANGLIN

CHANGLIN 906B

Multi-function Compact Wheel Loader

TIPPING LOAD	ENGINE POWER	SPEED	FLOW RATE	DUMPING HEIGHT
850 kg	25 hp	12 km/h	75 l/min	2,2 m

CHANGLIN is the company focusing on designing and manufacturing power machinery products with more 65 years history, long terms cooperating with related famous companies in Europe, Japan.
CHANGLIN multi function compact loader is one kind of actual work master, it's designed for utility purpose by changing different kinds of attachments while lowering costs, widely used forfarming, estate and property maintenance, construction, landscaping, groundcare, forestry and more other working sites.

CHANGLIN 906B

Multi-function Compact Wheel Loader

- **Engine**
  - Kubota D1105(18.2kw/25hp)/Perkins 403 J-11(18.2kw/25hp), 3 cylinder, water cooling, diesel engine.
    Compliant with Europe Stage V and USA Tier 4 Emission Standard Level.

- **Italian Bondioli & Pavesi hydraulic driving pump system**

POWERED BY KUBOTA /PERKINS

Characteristics of *CHANGLIN 906B*
Multi Function Compact Loader

- **Chassis**

➢ Articulated design allows precise driving or working in tight situations

- **Drive Speed**

➢ Drive speed area 0~12km/h

- **Certificate**

➢ CE+ROPS/FOPS certified

➢ LED lights equipped for all lights of the loader



➢ Extremely turn, white nylon position limited block, as a buffer, can avoid oil cylinder from sudden shock.



➢ Articulation joint connects front and rear frame, makes four wheels contact ground completely, to drive the load by the most track force and maneuverability..

➢ To control oil circuit to ON/OFF of attachments by manual operating ball-valve lever

➢ Double connection brake pedal, with the function of braking hydraulic pump and mechanical power at the same time.

➢ Drive pedal

➢ Hazard light equipped for safety driving

➢ Auxiliary hydraulic outlets equipped for possible to operate multi-purpose hydraulic attachments, double outlets at front, single outlet at rear.

➢ Oil circuit at rear machine.

➢ LCD graphic display equipped, efficient interaction between operator and the loader, electric system centralized control and maintenance conveniently

CHANGLIN 906B

Technical specifications

Engine data	
Manufacturer	Perkins
Engine type	403 J-11
Cylinders	3
Engine performance (max.)	18.4 (25) kW (hp)
at rpm (max.)	2800 rpm
Cubic capacity	1131 cm³
Cooling system	Water
Emissions standard level	V
Electrical system	
Operating voltage	12 V
Battery	45 Ah
Alternator	60 A
Weights and tipping load	
Operating weight (standard)	1900 kg
Tipping load with bucket - machine straight	850 kg
Tipping load with bucket - machine articulated	500 kg
Vehicle data	
Ground speed (optional)	0 - 12 km/h
Speed stages	1
Fuel tank capacity	26L
Hydraulic oil tank capacity	40L
Hydraulic system	
External services - Operating pressure	180bar
Steering hydraulics - Operating pressure	160 bar
Drive	
Type of drive (optional)	hydraulic
Traction drive	Oil engine
Noise values	
Average sound power level LwA	97 dB(A)
Guaranteed sound power level LwA	101 dB(A)
Specified sound pressure level LpA	83 dB(A)



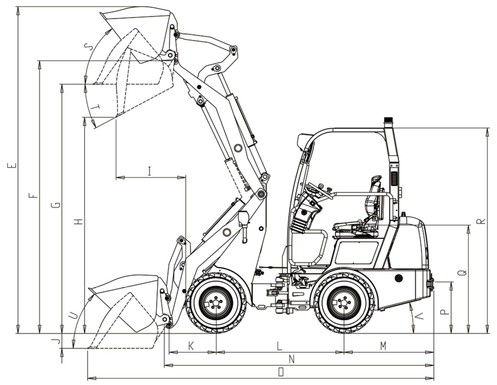

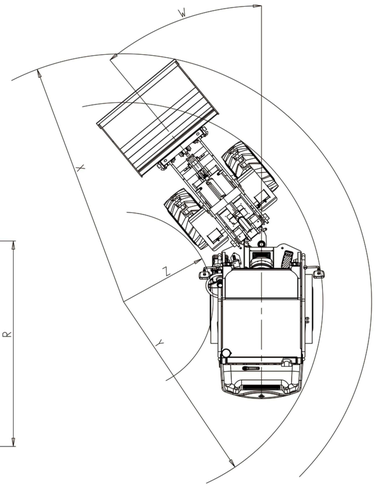

Dimensions

A	Bar width	840 mm
B	Ground clearance	175 mm
C	Track width	800 mm
D	Total width	1100 mm
E	Total working height	3460 mm
F	Height of bucket pivot (max.)	2900 mm
G	Load-over height	2600 mm
H	Dumping height	2180 mm
I	Operating distance for M	685 mm
J	Digging depth	170 mm
K	Axle middle to bucket pivot pin	550 mm
L	Wheelbase	1375 mm
M	Rear overhang	960 mm
N	Total length (without bucket)	3000 mm
O	Total length	3780 mm
P	Coupler height	585 mm
Q	Seat top height	1165 mm
R	Height to top of overhead guard fixed	2200 mm
S	Rollback angle at max. lifting height	48 °
T	Dumping angle (max.) (max.)	40 °
U	Rollback angle (on the ground)	48 °
V	Departure angle	25 °
W	Inclination angle	45 °
X	Maximum radius external	2580 mm
Y	Radius at the outer edge	2250 mm
Z	Inside turning radius	1110 mm