

ZG012S

SINOMACH-HI INTERNATIONAL EQUIPMENT CO.,LTD.

- Attachment Pipeline: AUX1 is Standard, Single and double direction switching.
- Optional Attachment: Mechanical Coupler, Hammer breaker, Thumb bucket.
- Deflection Boom: 57°Left, 61°right.
- Width adjustable undercarriage: 830~1000mm.
- Foldable Dozer blade: The width of the Dozer blade can be adjusted according to the telescopic range of undercarriage.
- Foldable Seat Frame: Convenient for transportation and indoor operation.
- Open the Engine Cover at 80°: The engine cover tilt-up operation exposes most of the engine—providing easier access to components.
- Sliding Seat: Can slide forward and backward to meet the space needs of different users.



国机重工集团国际装备有限公司
SINOMACH-HI International Equipment Co.,Ltd.




TECHNICAL PARAMETERS

技术规格Specifications	单位Unit	参数Parameter
整机质量Machine weight	kg	1200
标配斗容Rated bucket capacity	m ³	0.022
总长(运输状态)Overall length	mm	3025
总宽(运输状态)Overall width	mm	830/1000
总高(运输状态)Overall height	mm	2245
履带宽度(车宽)Width of undercarriage	mm	830/1000
履带长度Length of track	mm	1335
履带轴距Track gauge	mm	650/820
最小离地间隙Height between undercarriage and ground	mm	102
平衡重离地高度(配重)Height between platform and ground	mm	375
尾部回转半径Platform tail turning radius	mm	700 (840)
斗杆长度Arm length	mm	890
动臂长度Boom length	mm	1450

性能参数Performance	单位Unit	参数Parameter
发动机Engine model		KUBOTA D782
发动机额定功率Engine power	kW/rpm	9.8/2300
排放Emission		EPA Tier 4 Final/Euro5
爬坡能力Max. Grade ability		25°
斗杆最大挖掘力Max. digging force of arm	kN	5.4
铲斗最大挖掘力Max. Digging force of bucket	kN	10.4
行驶速度Traveling speed	km/h	2.0/3.5
平台回转速度Slewing speed of platform	rpm	11
液压系统流量Hydraulic system flow	L/min	18.4

作业参数Operating	单位Unit	参数Parameter
最大挖掘高度Max.digging height	mm	2980
最大挖掘深度Max.digging depth	mm	1860
最大垂直挖掘深度Max.vertical digging depth	mm	1550
最大挖掘半径Max.digging radius	mm	3390
最大地面挖掘半径Max.digging radius on ground level	mm	3340
最大卸载高度Max.dumping height	mm	2130
最小回转半径Min.slewing radius	mm	1335
推土铲最大提升高度Max. lifting height of dozers	mm	220
推土铲最大切土深度Max. depth of cut for dozers	mm	188
转向头向左转角度Boom swing angle left	°	57
转向头向右转角度Boom swing angle right	°	61

加注容量Tank capacity	单位Unit	参数Parameter
燃油箱容量Fuel tank capacity	L	10
液压油箱容量Hydraulic oil tank capacity	L	16.3
冷却系统Cooling system	L	3.1
发动机机油Engine lubricating oil	L	3.8

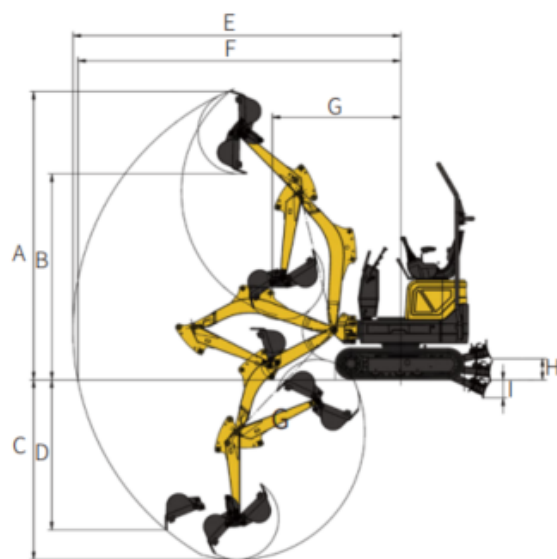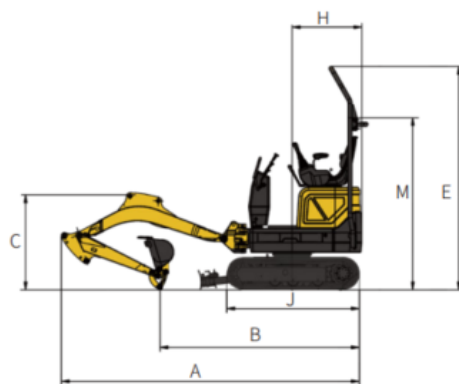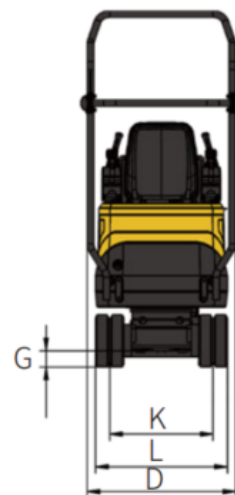

国机重工集团国际装备有限公司

SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.

Add: No.898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC: 213136

Tel: 86-519-86781288 86752400

Fax: 86-519-86781387

Http://www.sinomachhiglobal.com

E-mail: sales@changlin.com.cn service@changlin.com.cn



V.24091