

SINOMACH

SINOMACH

SINOMACH-HI INTERNATIONAL EQUIPMENT CO.,LTD.



Wheel Loader



Motor Grader



Excavator



Backhoe Loader



Vibratory Roller



Truck Crane



Bulldozer



Paver



Skid Steer

ZG036S

Mini Excavator

Engine Model:YANMAR 3TNV88F

Gross Power: 18.2kW/2200rpm

Operating Weight: 3,880kg



国机重工集团国际装备有限公司

SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.

Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC:213136

Tel:86-519-86781288 86752400

Fax:86-519-86781387

Http://www.sinomachglobal.com

E-mail:sales@changlin.com.cn service@changlin.com.cn



国机重工集团国际装备有限公司
SINOMACH-HI INTERNATIONAL EQUIPMENT CO.,LTD.

WALK-AROUND

LED LIGHT+ALARM LAMP



AUXILIARY PIPING

- The excavator standard comes with one set of auxiliary pipelines, and can also be equipped with a second set of auxiliary pipelines as optional to meet the requirements of various attachments.

YANMAR ENGINE

- 1. Equipped with Japan Yanmar engine, meeting emission standards for Euro V, North America EPA 4, and national IV non-road mobile machinery, which is energy saving and environmental protection with strong power.
- 2. Adopting a load sensitive control hydraulic system, the system has high pressure, high efficiency, and fast action response.
- 3. Fully hydraulic pilot operated, with excellent handling performance.



AIR CONDITIONER

TELESCOPIC TRACK



- The travel motor has an automatic speed control function, so the travel efficiency is higher.



CYLINDER PROTECTION PLATE

BOOM EXPLOSION-PROOF VALVE

FOLDABLE BLADE




HIGH PERFORMANCE IN TIGHT CONDITIONS

A COMPACT MODEL WITH HIGH PERFORMANCE

The overall color combination is reasonable and beautiful, and the overall shape is small and exquisite, reflecting a familial and serialized style. It has multiple functions, excellent performance, smooth movements, and simple and practical operation.

Zero-tail Swing

With zero-tail swing, even the tightest space becomes an efficient work place. The tail always stays within the width of the tracks (when extended) and lets you turn the canopy throughout its 360-degree turning radius with complete confidence and safety. Starting point by developing our zero-tail SE36SR, balance, fast and smooth operation was our main target. It results in a compact excavator with excellent balance and comes to its full potential in urban environments, landscaping, and small demolition in and outside buildings.



Boom Swing

The swing frame adopts high-strength cast steel parts, with optimized structural components, making it sturdy and durable.

Auxiliary piping


Auxiliary piping is standard. A second set of auxiliary piping is also available as an option. It can meet the configuration of various attachments.



OPERATIONAL COMFORT

LARGE OPERATOR ENVIRONMENT WITH ERGONOMIC CONTROL LAYOUT

The ZG036S provides an uncompromised operator environment – which, together with excellent visibility, provides unmatched operator comfort and safety. This machine is built around the operator – providing optimal ergonomics for operators of all sizes.

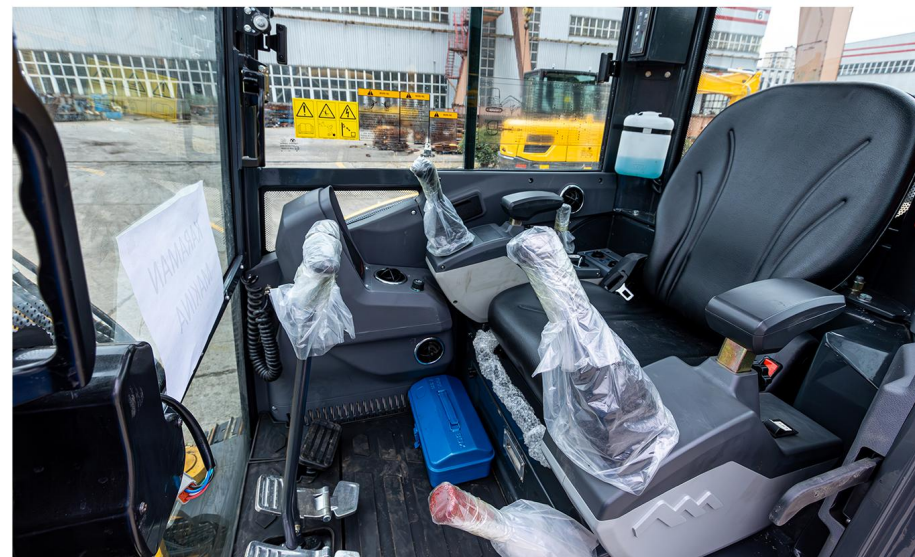

The 7-inch intelligent touch screen is used to integrate rich functions. And fuller and more intelligent human-computer interaction is also realized to enhance the operating experience.



The design of the instrument position is more ergonomic, making it more convenient and comfortable to use.




Emergency brake button

EASY ACCESS FOR MAINTENANCE

EASY SERVICE ACCESS

ZG036S is developed with taking particular attention to ease of service access. With a single access point for the daily maintenance of all main components, fuel level gauge and refuelling through the lockable cap.

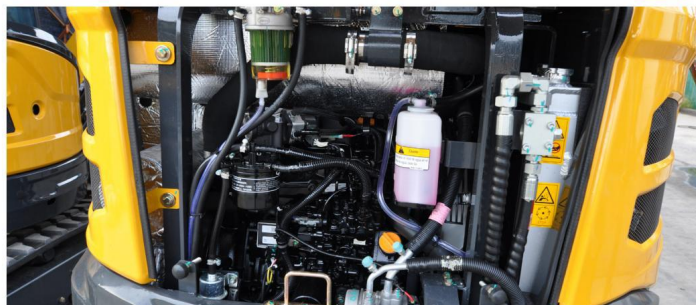

EASY MAINTENANCE

- Fuel filter
- Water separator
- Air filter
- Engine oil filter
- Engine oil level check
- Coolant
- Start motor
- DC generator
- Battery
- Main switch
- Radiator & Oil cooler

ZG036S is designed for lower maintenance cost with longer service intervals- resulting in more machine availability on-site. Meanwhile, skilled SHANTUI-trained technicians are available to provide extra support when needed.

LIFTING CAPACITY FORM

ISO 10567




A side-view technical drawing of a crawler excavator. Dimension 'A' is indicated by a horizontal double-headed arrow from the center of the track to the vertical line of the boom. Dimension 'B' is indicated by a vertical double-headed arrow from the ground level to the top of the boom.

Two technical drawings of the excavator's arm. The top drawing shows the boom and bucket fully extended, with a horizontal dimension line indicating a length of 2540. The bottom drawing shows the bucket alone, with a horizontal dimension line indicating a width of 1400.

LIFT CAPACITY		RATED LIFT CAPACITY OVER BLADE, BLADE DOWN-kg				RATED LIFT CAPACITY OVER BLADE, BLADE UP-kg				RATED LIFT CAPACITY OVER SIDE, BLADE UP-kg			
Amm Bmm		2000	3000	4000	At Max.Radius@(mm)	2000	3000	4000	At Max.Radius@(mm)	2000	3000	4000	At Max.Radius@(mm)
4000		-	-	-	803*@(2663)	-	-	-	704*@(2663)	-	-	-	660*@(2663)
3000		-	-	818*	688*@(3188)	-	-	534	484*@(3188)	-	-	503	458*@(3188)
2000		-	1000*	855*	667*@(3347)	-	820	522	410*@(3347)	-	762	491	386*@(3347)
1000		-	1427*	1026*	695*@(4755)	-	755	499	387*@(4755)	-	703	468	364*@(4755)
0		-	1650*	1127*	787*@(4602)	-	720	472	398*@(4602)	-	699	452	371*@(4602)
-1000		2352*	1632*	1072*	998*@(4148)	1367	717	472	459*@(4148)	1245	665	451	431*@(4148)
-2000		2037*	1217*	-	1020*@(3224)	1413	743	-	665*@(3224)	1287	691	-	620*@(3224)

NOTICE:
 1>Please refer to the Operator's Manual for other details.
 2.According to ISO10567 the rated load is 75% of the effective static tipping load (87% of the rated hydraulic lifting load (the standard value is the smaller one)).It's able to turn 360 degrees and work on the flat ground.
 3.Lift capacity stays with ±5% for all available track shoes.

SPECIFICATIONS

ENGINE		DIMENSIONS (Boom: 2540mm Arm:1400mm)	
Model	YANMAR 3TNV88F	A	Overall length
Type	Three cylinder direct injection	B	Ground contact length (Transportation)
No. of cylinder	3	C	Overall height(to top of boom)
Emission	EPA Tier 4 Final/ Europe Stage V	D	Overall width
Displacement	1.642L	E	Overall height(to top of cab)
Power output	18.2kW/2200rpm	F	Counter weight ground clearance
HYDRAULIC SYSTEM		G	Ground clearance
Type	Variable plunger pump	H	Tail swing radius
Max. hydraulic flow	96.8L/min	I	Crawler wheel base
DIGGING FORCE (ISO6015)		J	Track length
Bucket digging force	30.4kN	K	Track gauge
Arm digging force	18.2kN	L	Track width
BUCKET		M	Shoe width
Type	Backhoe bucket	O	Bonnet height
Bucket capacity	0.12m ³	P	Revolving frame width
Bucket width	650mm	Q	Distance from swivel center to tail
DRIVE SYSTEM			
Carrier roller qty	1×2		
Track roller qty	2×4		
Track shoes	2×44		
Travel speed	2.4/4.4 km/h		
Ground clearance	1295mm		
Grade ability	≤30°		
SWING SYSTEM			
Swing speed	0-9r/min		
REFILLING CAPACITIES & LUBRICATIONS			
Fuel tank	50L		
Cooling system	7L		
Engine oil	6.7L		
Hydraulic oil tank	40L		
System Capacity	40L		
OPERATING WEIGHT AND GROUND PRESSURE			
Shoe width	300mm		
Ground pressure	32kPa		
Operating weight	3880kg		
WORKING RANGE		mm	
A	Max. digging height	4910	
B	Max. dumping height	3545	
C	Max. digging depth	3075	
D	Max. vertical digging depth	2640	
E	Max. Depth cut for 2500mm Level Bottom	-	
F	Max. digging distance	5500	
G	Max. digging radius at ground level	5345	
H	Maximum Dozer Lift Height	375	
I	Maximum Dozer Dig Depth	370	

* The specifications are subject to change without notice. The pictures may include options. The actual color & appearance of the product may differ from what is shown.