


TECHNICAL PARAMETERS

Engine	Emission Standard	Euro 5
	Model	V3800-TE5HB-THJ-1
	Rated power/speed	93.4/2200 kw/rpm
	Number of cylinder	4
Track system	Maximum Travel speed	30km/h
	Tire Model	10.00-20
	Number of tyres per side	4
Performance Parameter	Standard Bucket capacity	0.8m³
	Swing speed	12rpm
	Maximum Grade ability	25°
	Maximum Bucket digging force	100KN
	Maximum Arm digging force	70 KN
	Hydraulic system pressure	32Mpa
	Machine weight	16500kg
	Fuel tank	220L
	Hydraulic oil tank	180
Machine size	Overall dimension (L*W*H)	8050mm*2595mm*3255mm
	Height of cabin	3150mm
	Wheel(track) Distance	1955mm
	Track gauge	2600mm
	Minimum Ground clearance	430mm
Working range	Swing radius at tail	2365mm
	Maximum Digging height	9200mm
	Maximum Dumping height	6620mm
	Maximum Digging depth	5350mm
	Maximum Vertical digging depth	4850mm
	Maximum Digging radius	8480mm
	Minimum swing radius	2820mm

MAIN DIMENTIONS

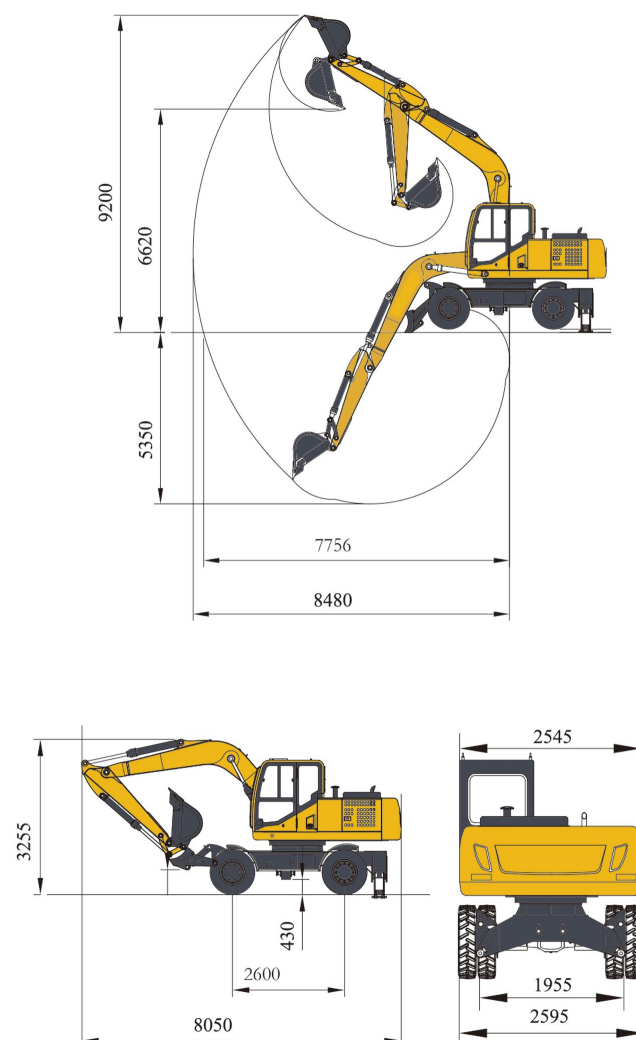

ZG180LJ

SINOMACH-HI International Equipment Co.,Ltd.

Rated Power:93.4/2200 kwrpm
Operating Weight:16500Kg

Bucker capacity:0.8m³

WHEEL EXCAVATOR



国机重工集团国际装备有限公司

SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.

Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC:213136

Tel:86-519-86781288 86752400

Fax:86-519-86781387

Https://www.cn-changlin.com/

E-mail:sales2@changlin.com.cn



V.24061



国机重工集团国际装备有限公司
SINOMACH-HI International Equipment Co.,Ltd.