SINOMACH

国机重工集团国际装备有限公司
SINOMACH-HI INTERNATIONAL EQUIPMENT CO.,LTD.

国机重工集团国际装备有限公司
SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.
Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China
PC:213136
Tel:86-519-86781288 86752400
Fax:86-519-86781387
Http://www.sinomachhiglobal.com
E-mail:sales@changlin.com.cn service@changlin.com.cn

SINOMACH

COMPANY PROFILE
公司简介

China SINOMACH Heavy Industry Corporation (SINOMACH Heavy Industry), founded in January 2011, is a wholly-owned subsidiary of China National Machinery Industry Corporation(SINOMACH Group), which is one of the Fortune 500 enterprises, and is also a large-sized equipment manufacturing group established through restructuring and reform of the resources of the construction machinery business of SINOMACH. Headquartered in Beijing, China

SINOMACH heavy Industry covers construction machinery an R&D manufacture, service, project contracting, and trade of related fields with the cooperative institutions distributed in more than 100 countries and regions across the world.

Looking back on the past, SINOMACH Heavy Industry, on the strength of Chinese machine industry, once enjoyed such glories and brilliance as the only national research institute of construction machinery, the first road roller, the first land leveler, and the first wood loader in Chinese construction machinery field in the one hundred years' history of machinery equipment. At present, the new SINOMACH-HI is walking in big strides toward a new journery with inheritance and development.

HONOR CULTURE
荣誉文化

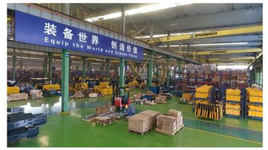

SINOMACH inherits the traditional Chinese "harmony" culture and is devoted to transforming itself into a harmonious, long-lasting and happy company.

It is committed to seeking harmonious co-existence between business and nature, as well as sustainable growth of enterprise, employees and the whole community.

Fortune
500+
companies

Export experience
30+
years

Manufacturing
60+
years

HYUNDAI HEAVY INDUSTRIES CO.,LTD. · TEREX · KOMATSU
Atlas Copco · JCB · MILACRON Plastics Technologies Group
KATO · Epiroc · WACKER NEUSON
Genie · SANY · SHANTUI 价值引领 共赢未来

三角形破碎锤

SIDE TYPE HYDRAULIC BREAKER

产品特点

容易控制，定位方便
持久耐用，工作效率高
打击力强，使用寿命超长
操作性能稳定，售后服务便捷

product feature

Easy to control, easy to locate
Durable, high efficiency
Strong striking force, long service life
Stable operation performance,
convenient after-sales service

型号	Model	Unit	GCB53	GCB60	GCB75	GCB85	GCB100	GCB125	GCB210
适配挖机	Suitable Excavator	Ton	2.5-4.5	4-7	6-9	7-14	10-15	15-18	18-26
总重量	Operating Weight	Kg	132	275	418	561	842	1381	1609
液压油流量	Required Oil Flow	l/min	25-50	40-70	50-90	60-100	80-110	90-120	100-150
设定压力	Setting Pressure	Bar	150	170	180	190	200	210	210-230
液压油压力	Operating Pressure	Bar	90-120	110-140	120-150	130-160	150-170	150-170	160-180
冲击力	Impact Energy	Joule	406	677	1017	1355	2033	2711	3423
打击频率	Impact Rate	Bpm	600-1100	500-900	400-800	400-800	350-700	350-650	350-500
软管直径	Hose Diameter	Inch	1/2	1/2	1/2	3/4	3/4	1	1
声音分贝数	Noise Level	DB	109	109	115	112	114	115	120
钎杆直径	Tool Diameter	MM	53	68	75	85	100	125	135

质量保障
Quality Assurance

操作稳定
Stable Operation

售后服务
Sale Protection

GCB220	GCB320	GCB350	GCB400	GCB180	GCB200	GCB300	GCB330	GCB1950	GCB2000
18-26	28-35	30-40	35-40	12-18	18-25	25-33	35-45	40-55	50-70
1950	2655	2735	4167	1406	1698	2462	3001	5039	6205
120-180	180-240	200-260	210-290	115-150	125-160	175-220	200-250	240-290	260-300
210-230	240-260	240-260	260-280	210	210-230	210	210	300-310	300-310
160-180	180-200	180-200	180-200	160-180	160-180	160-180	160-180	220-280	220-280
4067	6779	8812	12202	2646	3692	5193	10388	17088	21360
350-500	300-450	250-400	250-350	350-650	350-600	300-450	300-400	180-200	150-200
1	1-1/4	1-1/4	1-1/4	1	1	1	1-1/4	1-1/4	1-1/4
118	123	123	125	114	120	120	123	125	125
140	155	165	175	120	135	150	160	195	200

塔型破碎锤

TOP TYPE HYDRAULIC BREAKER

产品特点

容易控制，定位方便
持久耐用，工作效率高
打击力强，使用寿命超长
操作性能稳定，售后服务便捷

product feature

Easy to control, easy to locate
Durable, high efficiency
Strong striking force, long service life
Stable operation performance,
convenient after-sales service

质量保障
Quality Assurance

操作稳定
Stable Operation

售后服务
Sale Protection

型号	Model	Unit	GCB53V	GCB60V	GCB75V	GCB85V	GCB100V	GCB125V	GCB210V
适配挖机	Suitable Excavator	Ton	2.5-4.5	4-7	6-9	7-14	10-15	15-18	18-26
总重量	Operating Weight	Kg	148	321	407	638	979	1463	1698
液压油流量	Required Oil Flow	l/min	25-50	40-70	50-90	60-100	80-110	90-120	100-150
设定压力	Setting Pressure	Bar	150	170	180	190	200	210	210-230
液压油压力	Operating Pressure	Bar	90-120	110-140	120-150	130-160	150-170	150-170	160-180
冲击力	Impact Energy	Joule	406	677	1017	1355	2033	2711	3423
打击频率	Impact Rate	Bpm	600-1100	500-900	400-800	400-800	350-700	350-650	350-500
软管直径	Hose Diameter	Inch	1/2	1/2	1/2	3/4	3/4	1	1
声音分贝数	Noise Level	DB	109	109	115	112	114	115	120
钎杆直径	Tool Diameter	MM	53	68	75	85	100	125	135

GCB220V	GCB320V	GCB350V	GCB400V	GCB180V	GCB200V	GCB300V	GCB330V	GCB1950V	GCB2000V
18-26	28-35	30-40	35-40	12-18	18-25	25-33	35-45	40-55	50-70
2050	3059	3295	4216	1479	1787	2591	3158	5039	6205
120-180	180-240	200-260	210-290	115-150	125-160	175-220	200-250	240-290	260-300
210-230	240-260	240-260	260-280	210	210-230	210	210	300-310	300-310
160-180	180-200	180-200	180-200	160-180	160-180	160-180	160-180	220-280	220-280
4067	6779	8812	12202	2646	3692	5193	10388	17088	21360
350-500	300-450	250-400	250-350	350-650	350-600	300-450	300-400	180-200	150-200
1	1-1/4	1-1/4	1-1/4	1	1	1	1-1/4	1-1/4	1-1/4
118	123	123	125	114	120	120	123	125	125
140	155	165	175	120	135	150	160	195	200

静音型破碎锤

BOX TYPE HYDRAULIC BREAKER

产品特点

容易控制，定位方便
持久耐用，工作效率高
打击力强，使用寿命超长
操作性能稳定，售后服务便捷

product feature

Easy to control, easy to locate
Durable, high efficiency
Strong striking force, long service life
Stable operation performance,
convenient after-sales service

型号	Model	Unit	GCB53S	GCB60S	GCB75S	GCB85S	GCB100S	GCB125S	GCB210S
适配挖机	Suitable Excavator	Ton	2.5-4.5	4-7	6-9	7-14	10-15	15-18	18-26
总重量	Operating Weight	Kg	168	325	413	629	948	1427	1650
液压油流量	Required Oil Flow	l/min	25-50	40-70	50-90	60-100	80-110	90-120	100-150
设定压力	Setting Pressure	Bar	150	170	180	190	200	210	210-230
液压油压力	Operating Pressure	Bar	90-120	110-140	120-150	130-160	150-170	150-170	160-180
冲击力	Impact Energy	Joule	406	677	1017	1355	2033	2711	3423
打击频率	Impact Rate	Bpm	600-1100	500-900	400-800	400-800	350-700	350-650	350-500
软管直径	Hose Diameter	Inch	1/2	1/2	1/2	3/4	3/4	1	1
声音分贝数	Noise Level	DB	109	109	115	112	114	115	120
钎杆直径	Tool Diameter	MM	53	68	75	85	100	125	135

质量保障
Quality Assurance

操作稳定
Stable Operation

售后服务
Sale Protection

GCB220S	GCB320S	GCB350S	GCB400S	GCB180S	GCB200S	GCB300S	GCB330S	GCB1950S	GCB2000S
18-26	28-35	30-40	35-40	12-18	18-25	25-33	35-45	40-55	50-70
1978	2896	3117	4390	1463	1766	2519	3076	5039	6205
120-180	180-240	200-260	210-290	115-150	125-160	175-220	200-250	240-290	260-300
210-230	240-260	240-260	260-280	210	210-230	210	210	300-310	300-310
160-180	180-200	180-200	180-200	160-180	160-180	160-180	160-180	220-280	220-280
4067	6779	10846	12202	2646	3692	5193	10388	17088	21360
350-500	300-450	250-350	250-350	350-650	350-600	300-450	300-400	180-200	150-200
1	1-1/4	1-1/4	1-1/4	1	1	1	1-1/4	1-1/4	1-1/4
118	123	124	125	114	120	120	123	125	125
140	155	165	175	120	135	150	160	195	200

缸体系列
CYLINDER SERIES

SINOMACH

上缸体
Bake Head

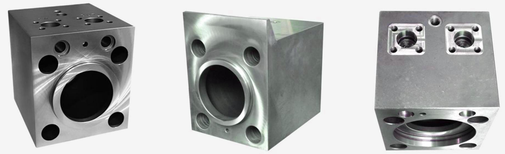

only the best alloy steel,made from well-known corporations.We have a erfect Quality Management System,inspect each step in the manufactring process during production.



中缸体
Cylinder

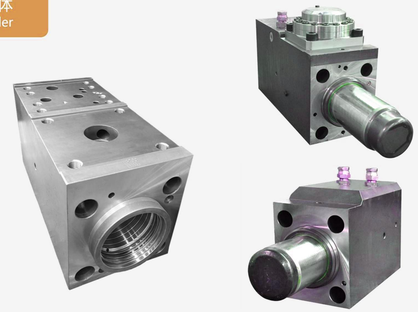

下缸体
Front Head

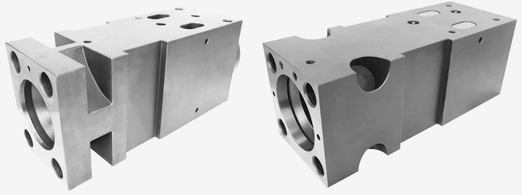

配件系列
ACCESSORIES SERIES

SINOMACH

螺栓
Throdugh Bolt

活塞
Piston

圆销
Rod Pin

内外套
Bushing