


GE330D 外形尺寸及工作范围 Dimensions & Working range

性能参数 (标准型) Specifications (Standard)


类别ITEM	单位Unit	
操作重量 Operating weight	kg	31380
额定斗容(SAE) Rated bucket capacity	m³	1.6
发动机 Engine	型号 Model	Cummins 6LTA48.9-C325
	额定功率 Rated power	kW/rpm 241/2000
	最大扭矩 Max. torque	N.m/rpm 1400/1400
液压系统 Hydraulic system	工作压力 Working pressure	MPa 34.3/36.3
	最大流量 Max. flow	L/min 2×266
	回转速度 Rotating speed	rpm 10.0
	行走速度 Travelling speed	km/h 4.8/3.0
工作性能 Performance	最大铲斗挖掘力 Max. digging force (Bucket)	KN 225
	最大斗杆挖掘力 Max. digging force (Stick)	KN 182
	爬坡能力 Gradeability	% 70
	最大牵引力 Max. drawing force	KN 266
	K 履带长度 Track length	mm 4950
	J 履带接地长度 Track ground length	mm 4030
	M 轨距 Track gauge	mm 2880
行走装置 Walking device	N 标准履带板宽 Rated track width	mm 600
	接地比压 Ground pressure	kgf/cm² 0.594
	H 最小离地间隙 Min. Ground clearance	mm 471
油箱容量 Tank capacity	燃油箱 Fuel	L 560
	液压油箱 Hydraulic oil	L 280
外形尺寸 Dimensions	A 全长 Length	mm 10700
	B 总宽度 Width	mm 3280
	C 总高度 Height	mm 3546
	F 配置离地间隙 Counterweight ground clearance	mm 1193
	I 尾部长度 Platform length	mm 3205
	D 上部宽度 Upper width	mm 3060
	E 驾驶室高度 Cab height	mm 3145
	I' 尾部回转半径 Rear swing radius	mm 3250

标准型 Standard	
动臂长度 Arm length	6.2m
斗杆长度 Stick length	2.65m
A 最大挖掘距离 Max. digging reach	10233mm
A' 地面最大挖掘距离 Max. ground digging reach	10028mm
B 最大挖掘深度 Max. digging depth	6536mm
B' 最大挖掘有效深度 Max. valid digging depth	6331mm
C 最大垂直挖掘深度 Max. vertical digging depth	4758mm
D 最大挖掘高度 Max. digging height	9617mm
E 最大卸载高度 Max. dumping height	6666mm
F 最小回转半径 Min. turning radius	4256mm

工作范围 Working Range



外形尺寸 Dimensions

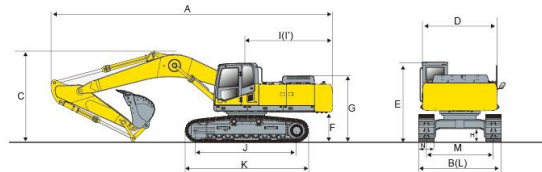

国机重工集团国际装备有限公司 SINOMACH-HI INTERNATIONAL EQUIPMENT CO.,LTD.

地址：中国江苏省常州市新北区黄河西路898号

ADD: No.898 West Huanghe Road, Changzhou, Jiangsu, China

电话 Tel: +86-519-86781288

传真 Fax: +86-519-86781387

邮编 P.C.: 213136

邮箱 Email: sales@changlin.com.cn

网站 Website: www.sinomachiglobal.com

注：为改善产品质量，本资料内的参数及图片如有改动，恕不另行通知。We May Change Without Notice.

2023.02

SINOMACH

Equipped with new generation special-designed Tier II engine for excavator
Lower fuel cost, Stronger power


GE330D

Hydraulic Excavator

Operating Weight: 31380kg
Rated Bucket Capacity: 1.6m³
Power: 241kw



国机重工集团国际装备有限公司
SINOMACH-HI International Equipment Co., Ltd.

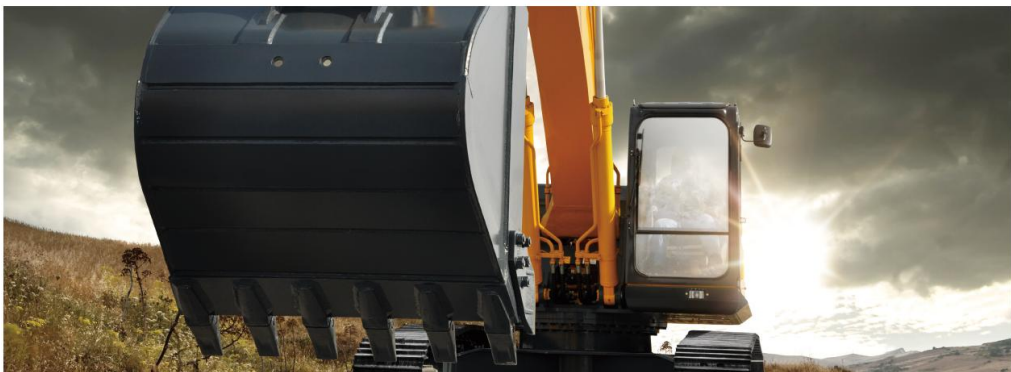

成熟、可靠的负流量、双泵交叉全功率控制液压系统，响应速度更快。
Mature and reliable negative flow, double pump cross full power control hydraulic system, faster response speed.



驾驶室硅油减振器，工作时更加平稳、舒适。
The silicone oil shock absorber in the cab is more stable and comfortable.



采用康明斯发动机，高耐负荷，燃油消耗低，动力更强，更持久。
Cummins engine, high load resistance, low fuel consumption, more powerful and lasting power.



大容量铝制冷却装置在满负荷和连续作业的情况下，也能起到良好的散热效果。
Under the condition of full load and continuous operation, the large capacity aluminum cooling device can also play a good heat dissipation effect.



采用插入式世界顶级品牌空气滤清器滤芯，更换容易，维护时间高达500小时
Adopted with plug-in air filter element of world top brand, easy to replace and maintenance time up to 500 hours



全流量机油过滤器保证燃油喷射，使故障最低，维护时间高达500小时
The full flow oil filter ensures fuel injection, with minimum malfunction and maintenance time up to 500 hours



方便，低耗的维护保养

- 方便检查，快速清洁的滤清器。
- 液压油滤芯耐久性更强，延长了更换周期。

After-sales

SINOMACH provides specialized technical assistance and original spare parts that are available for you whenever you need them.

坚实，稳定的行走机构

- 加强型箱形侧梁和X型中框架结构，全部采用高强度、低应力合金钢板焊接而成，确保行走架的高强度和整机的稳定性；
- 配以高可靠性的托链轮、支重轮、履带护架，高强度的履带使机器能够承受恶劣工况下的超大负荷引起的冲击；
- 回平台侧梁采用加大截面高度，提高强度和刚度，精心布置，合理调配整机重心，加强整机工作时的稳定性；

Solid and stable traveling structure

· Whole strengthen box-type side beam and X-type middle frame welded by low stress and high strength steel plate guarantee the high strength of traveling structure and the stability of whole machine.

· High reliability carrying wheels, bearing wheels, track protection framework and high strength track are applied to bear the impact caused by large load in bad working conditions.

· LC-type lengthened chassis is more stability.

规格Specifications

整机工作重量Operating weight	31380kg
标准铲斗容量Standard bucket capacity	1.6m³
斗杆长度Arm length	2.65m
动臂长度Boom length	6.2m

发动机Engine

型号Model	CUMMINS 6LTA8.9-C325
型式Type	涡轮增压中冷Turbo-charged with inter-cooled
功率Power	241KW/2000rpm
最大扭矩Max.torque	1400N·m / 1400rpm
气缸数No of cylinders	6
排气量Displacement	8.9L

液压系统Hydraulic system

主泵Main pump:	
类型Type	变量柱塞泵Variable displacement axial piston pumps
最大排量Max. displacement	2x140cc/rev
主溢流阀设定压力Working pressure	34.3Mpa
液压马达Hydraulic motor:	
回转Swing	柱塞定量Fixed displacement axial piston motor
行走Travel	柱塞变量Variable displacement axial piston motors

性能Performance

回转速度Swing speed	10.0rpm
最大行走速度高/低Max. travel speed H/L	4.8/3.0km/h
爬坡能力Gradeability	35° (70%)
铲斗最大挖掘力Max. digging force of bucket	225kN
斗杆最大挖掘力Max.digging force of arm	182kN
接地比压Ground pressure	59.8kpa

油箱容量Tank capacity

燃油箱容积Fuel tank capacity	560L
液压油箱容积Hydraulic tank capacity	280L

· 所有测量数值均为近似值