


ZG080J / 履带式挖掘机 ZG080J /crawler excavator

ZG080J

SINOMACH-HI International Equipment Co.,Ltd.

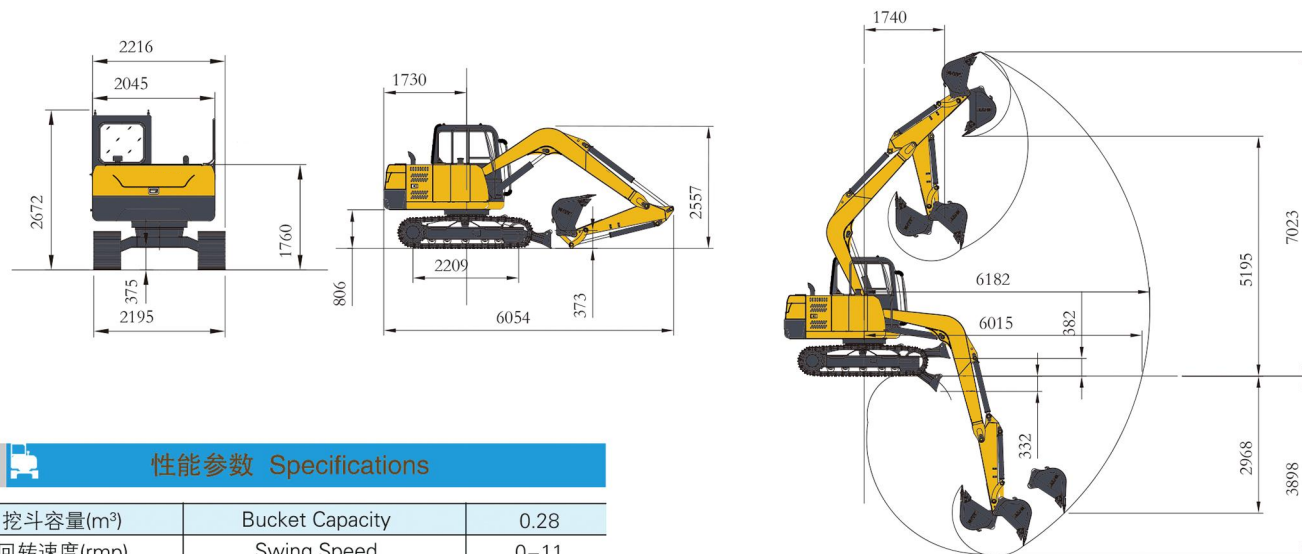

性能参数 Specifications		
挖斗容量(m³)	Bucket Capacity	0.28
回转速度(rmp)	Swing Speed	0-11
最大爬坡角度(°)	Gradeability	35
挖斗最大挖掘力(KN)	Max.Bucket Digging Force	56
斗杆最大挖掘力(KN)	Max.Arm Digging Force	38
发动机型号	Engine Model	KUBOTA V2607
功率/转速(KW/rmp)	Power/revolution speed	42.4/2000
轮胎型号	Tire Model	-
系统压力(MPa)	System Pressure	27

整机尺寸 Machine size		
外形尺寸长x宽x高(mm)	Dimension Length*Width*Height	6054x2216x2672
驾驶室高(mm)	Cabin Height	2672
轴距(mm)	Axle Base	2209
轮(轨)距(mm)	Wheel(track) Distance	1745
最小离地间隙(mm)	Minimum ground clearance	375
尾部回转半径(mm)	Tail Swing Radius	1730

作业范围 Working range		
最大挖掘高度(mm)	Max.Digging Height	7023
最大卸载高度(mm)	Max.Dumping Height	5195
最大挖掘深度(mm)	Max.Digging Depth	3898
最大垂直挖深(mm)	Max.Vertical Digging Depth	2968
最大挖掘半径(mm)	Max.Digging Radius	6182
最小回转半径(mm)	Min.Swing Radius	1740
推土铲最大离地间隙(mm)	Max.Dozer Blade Lifting Distance	382
推土板沉下最大深度(mm)	Max.Dozer Blade Cutting Distance	332



EXCAVATOR 挖掘机



国机重工集团国际装备有限公司

SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.

Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC:213136

Tel:86-519-86781288 86752400

Fax:86-519-86781387

Http://www.sinomachhiglobal.com

E-mail:sales@changlin.com.cn service@changlin.com.cn



国机重工集团国际装备有限公司
SINOMACH-HI International Equipment Co.,Ltd.