


TECHNICAL PARAMETERS

|                       |                                |                      |
|-----------------------|--------------------------------|----------------------|
| Engine                | Emission Standard              | Euro 5               |
|                       | Model                          | V3800-TE5HB-THJ-1    |
|                       | Rated power/speed              | 93.4/2200 kw/rpm     |
|                       | Number of cylinder             | 4                    |
| Track system          | Maximum Travel speed           | 30km/h               |
|                       | Tire Model                     | 10.00-20             |
|                       | Number of tyres per side       | 4                    |
| Performance Parameter | Standard Bucket capacity       | 0.8m³                |
|                       | Swing speed                    | 12rpm                |
|                       | Maximum Grade ability          | 25°                  |
|                       | Maximum Bucket digging force   | 100KN                |
|                       | Maximum Arm digging force      | 70 KN                |
|                       | Hydraulic system pressure      | 32Mpa                |
|                       | Machine weight                 | 16500kg              |
|                       | Fuel tank                      | 220L                 |
|                       | Hydraulic oil tank             | 180                  |
|                       | Overall dimension (L*W*H)      | 8050mm*2595mm*3255mm |
| Machine size          | Height of cabin                | 3150mm               |
|                       | Wheel(track) Distance          | 1955mm               |
|                       | Track gauge                    | 2600mm               |
|                       | Minimum Ground clearance       | 430mm                |
|                       | Swing radius at tail           | 2365mm               |
| Working range         | Maximum Digging height         | 9200mm               |
|                       | Maximum Dumping height         | 6620mm               |
|                       | Maximum Digging depth          | 5350mm               |
|                       | Maximum Vertical digging depth | 4850mm               |
|                       | Maximum Digging radius         | 8480mm               |
|                       | Minimum swing radius           | 2820mm               |

MAIN DIMENTIONS

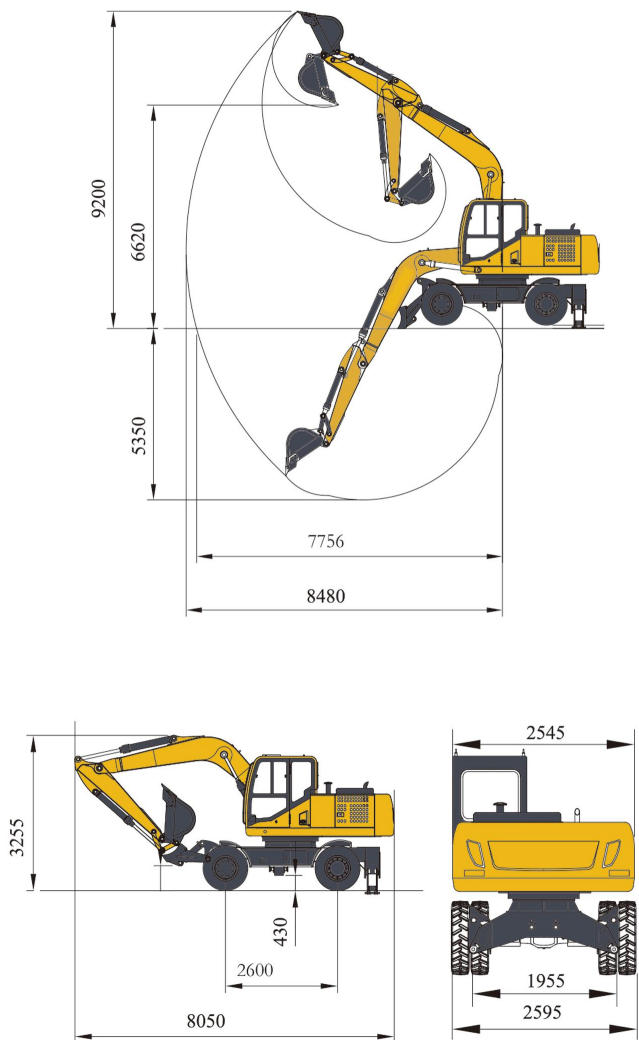

ZG180LJ

SINOMACH-HI International Equipment Co.,Ltd.

Rated Power:93.4/2200 kwrpm

Bucker capacity:0.8m³

Operating Weight:16500Kg

WHEEL EXCAVATOR



国机重工集团国际装备有限公司

SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.

Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC:213136

Tel:86-519-86781288 86752400

Fax:86-519-86781387

Https://www.cn-changlin.com/

E-mail:sales2@changlin.com.cn



V.24061



国机重工集团国际装备有限公司

SINOMACH-HI International Equipment Co.,Ltd.