



KAUHA 1:8 testbed: general arrangement

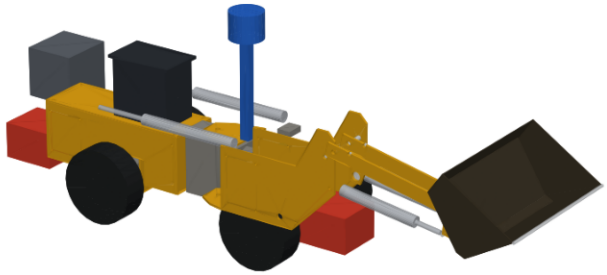

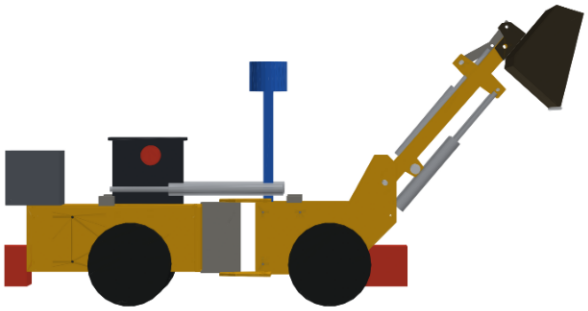

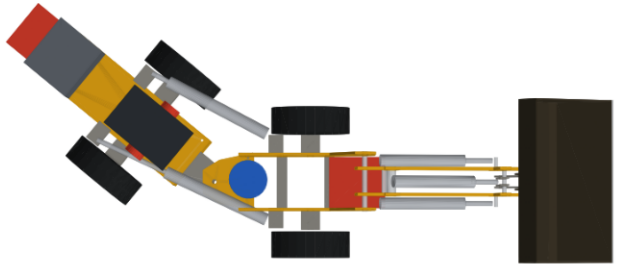

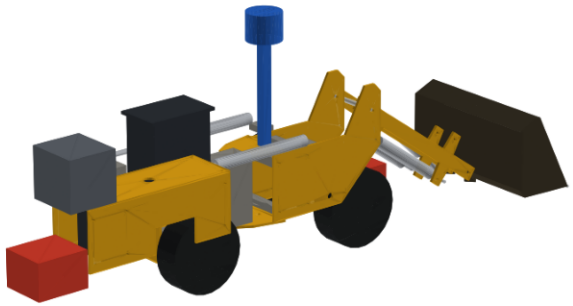


KAUHA 1:8 testbed | assembly | see BOM | qty 1 | STEP: kauha_scale8_assembly.step

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

BK_hlink_lug (datum: lower-left = (-34.3, 3.8) in the part frame)

hole	u	v	dia
H1	-22.3	33.8	8.20

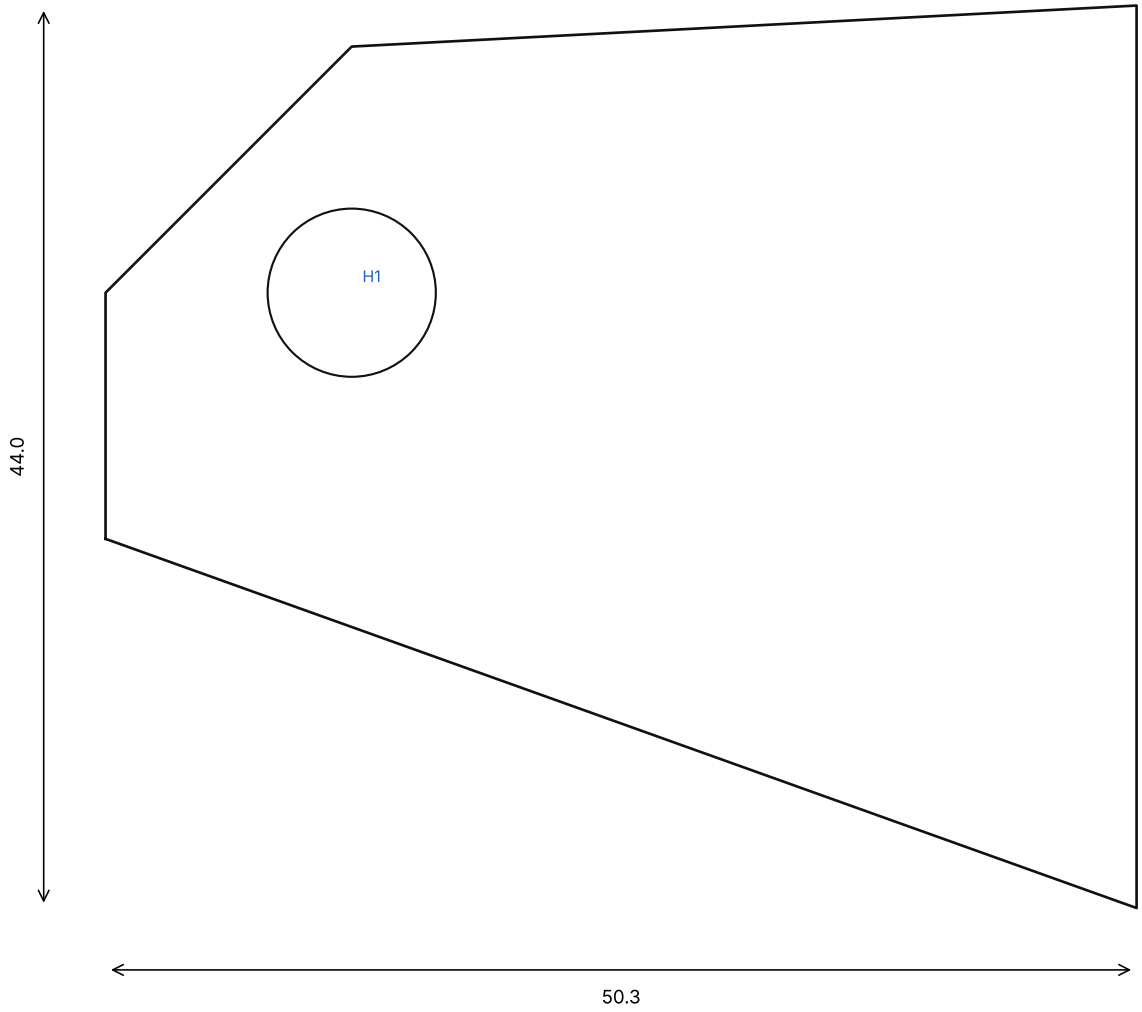


Make: BK_hlink_lug_L, BK_hlink_lug_R
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | BK_hlink_lug | S235 t=3 mm | qty 2 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

BK_pivot_lug (datum: lower-left = (-14.0, -24.0) in the part frame)

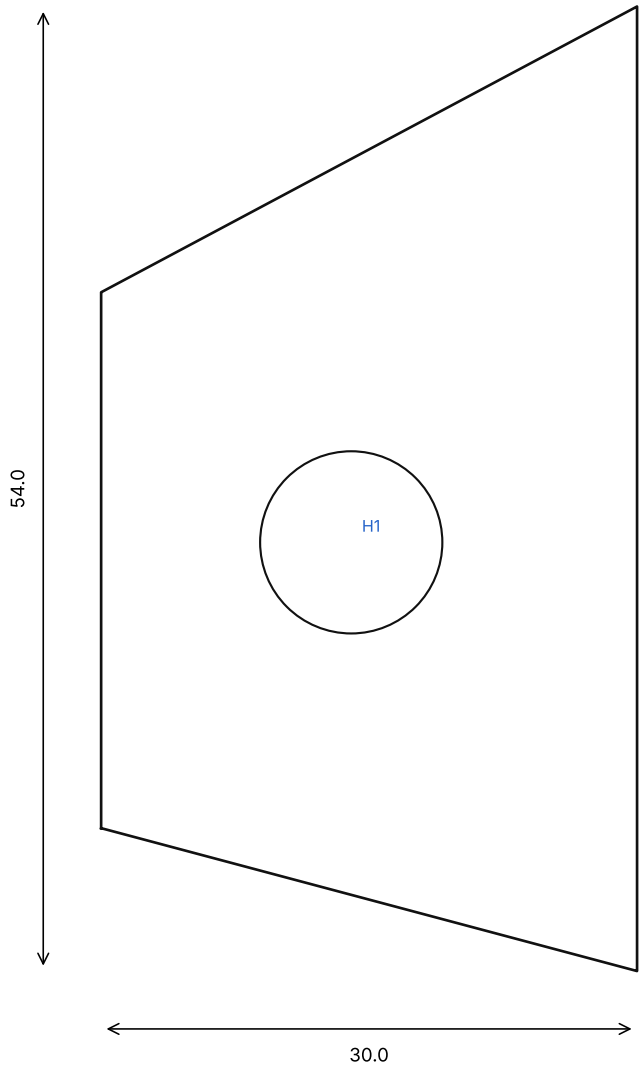


hole	u	v	dia
H1	0.0	0.0	10.20

Make: BK_pivot_lug_L, BK_pivot_lug_R
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | BK_pivot_lug | S235 t=4 mm | qty 2 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

BK_side (datum: lower-left = (22.0, -30.0) in the part frame)

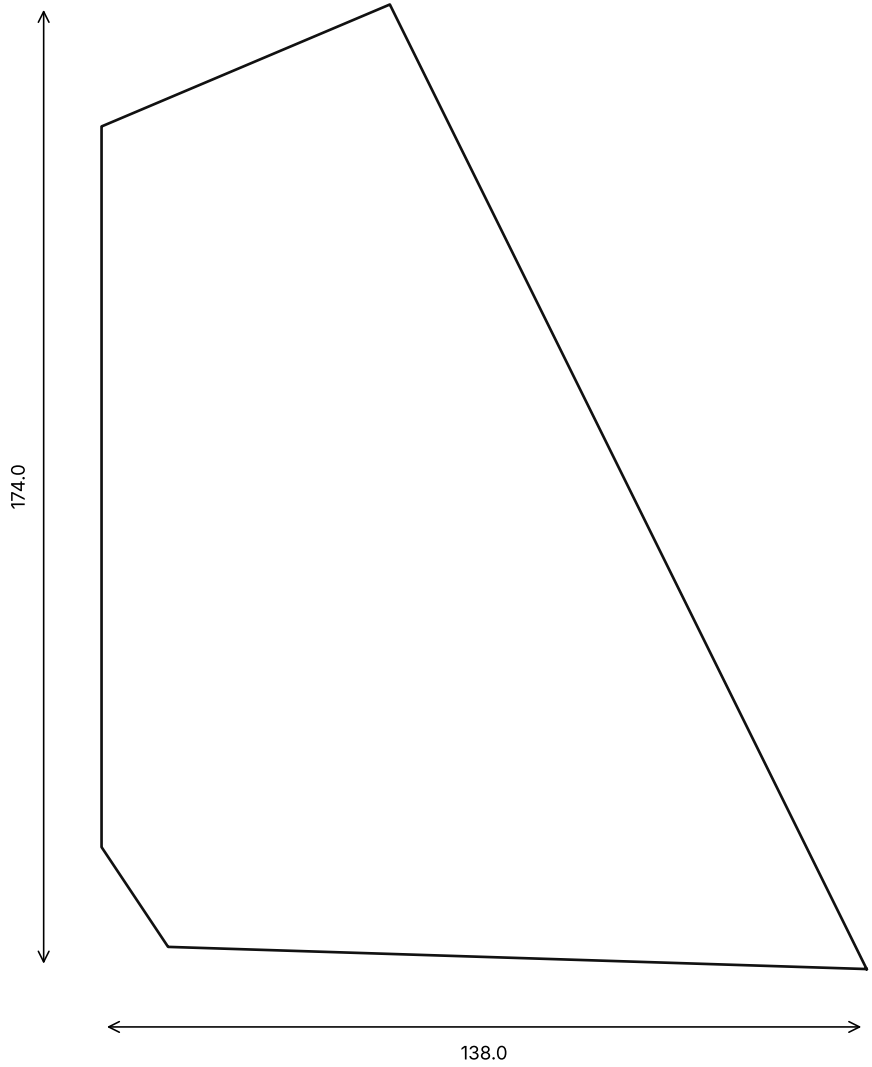

Make: BK_side_L, BK_side_R
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | BK_side | S235 t=3 mm | qty 2 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

hole	u	v	dia
H1	0.0	0.0	10.20
H2	368.8	0.0	10.20
H3	37.1	12.4	8.20
H4	286.9	44.7	8.20
H5	62.0	-28.0	20.20
H6	292.6	-47.0	6.50

BM_arm (datum: lower-left = (-18.0, -59.0) in the part frame)




Make: BM_arm_L, BM_arm_R
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | BM_arm | Al5083 t=6 mm | qty 2 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

FF_hinge_lug (datum: lower-left = (-224.0, -60.0) in the part frame)

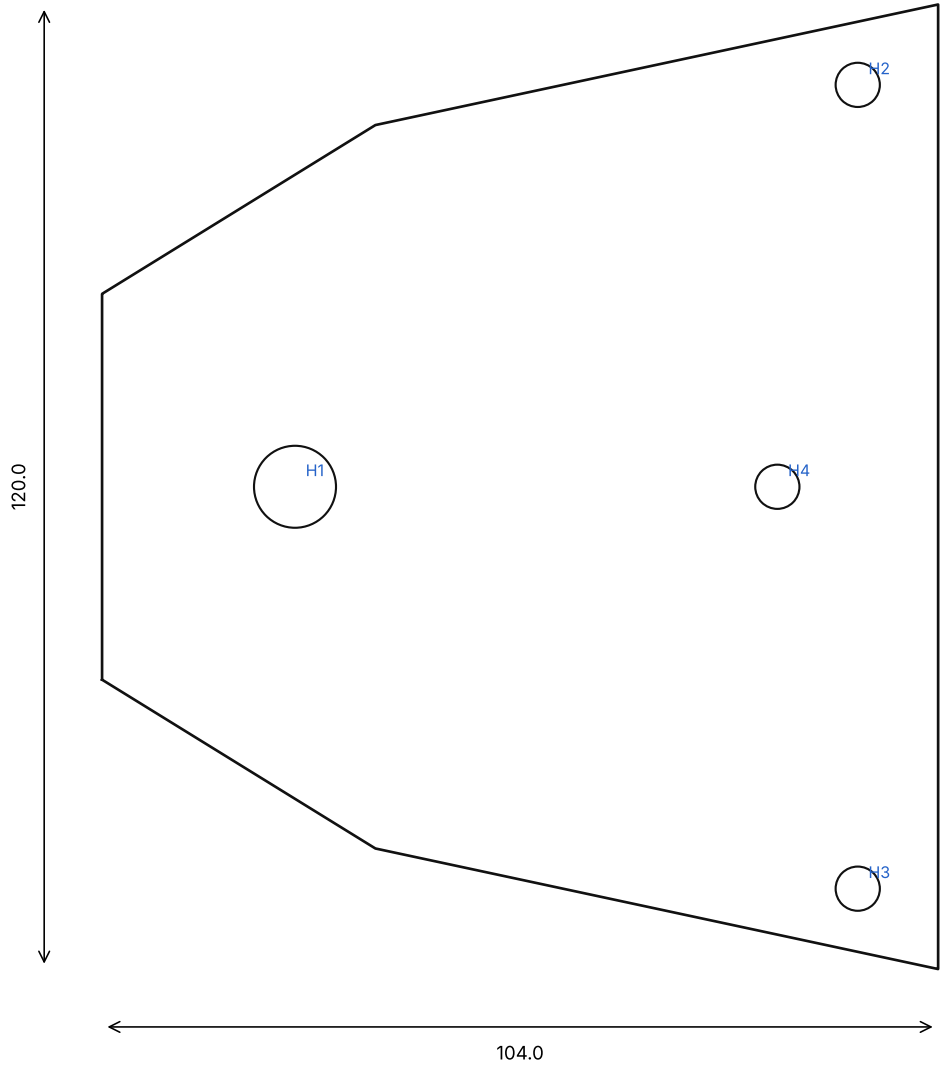

hole	u	v	dia
H1	-200.0	0.0	10.20
H2	-130.0	50.0	5.50
H3	-130.0	-50.0	5.50
H4	-140.0	0.0	5.50


Make: FF_hinge_lug_top, FF_hinge_lug_bottom
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | FF_hinge_lug | Al5083 t=5 mm | qty 2 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

FF_side_plate (datum: lower-left = (-150.0, 60.0) in the part frame)

hole	u	v	dia
H1	0.0	82.5	14.00
H2	112.5	243.8	10.20
H3	124.0	177.1	6.50
H4	-135.0	80.0	5.50
H5	-135.0	185.0	5.50
H6	-60.0	80.0	5.50
H7	-60.0	185.0	5.50
H8	40.0	80.0	5.50

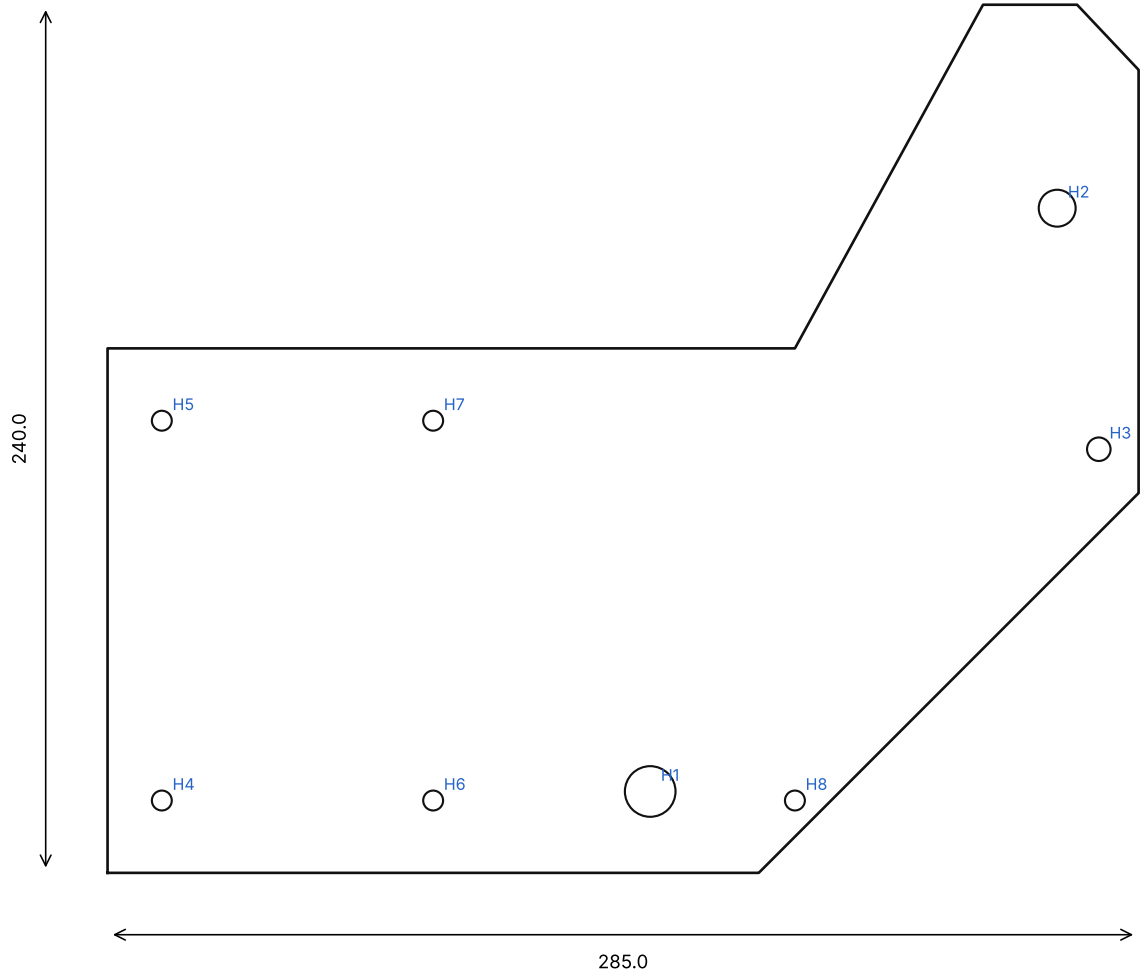


Make: FF_side_plate_L, FF_side_plate_R
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | FF_side_plate | Al5083 t=5 mm | qty 2 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

hole	u	v	dia
H1	-275.0	50.0	5.50
H2	-275.0	-50.0	5.50
H3	-600.0	50.0	5.50
H4	-600.0	-50.0	5.50
H5	-420.0	0.0	25.00

RF_deck (datum: lower-left = (-612.5, -60.0) in the part frame)

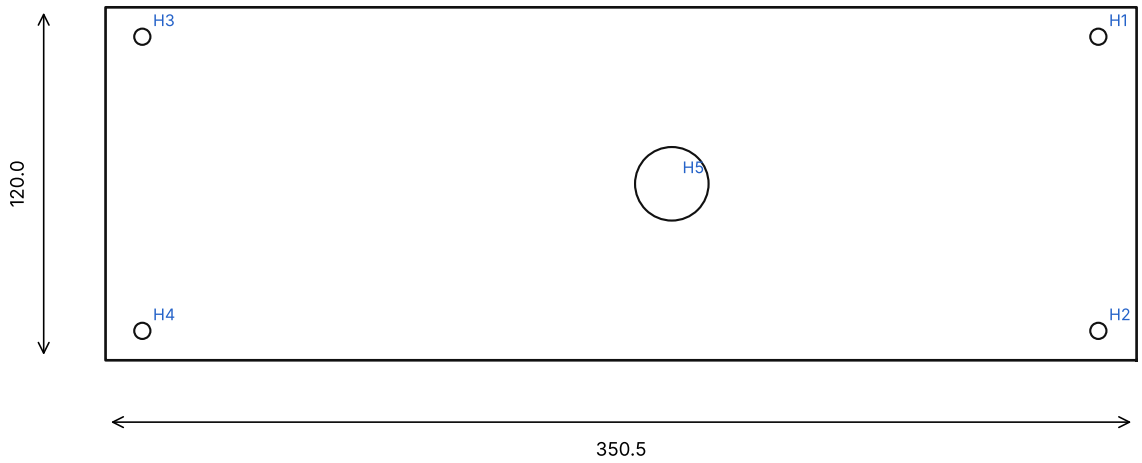


Make: RF_deck
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | RF_deck | Al5083 t=4 mm | qty 1 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

RF_front_cross (datum: lower-left = (-60.0, 65.0) in the part frame)

hole	u	v	dia
H1	-50.0	85.0	5.50
H2	50.0	85.0	5.50
H3	0.0	130.0	5.50

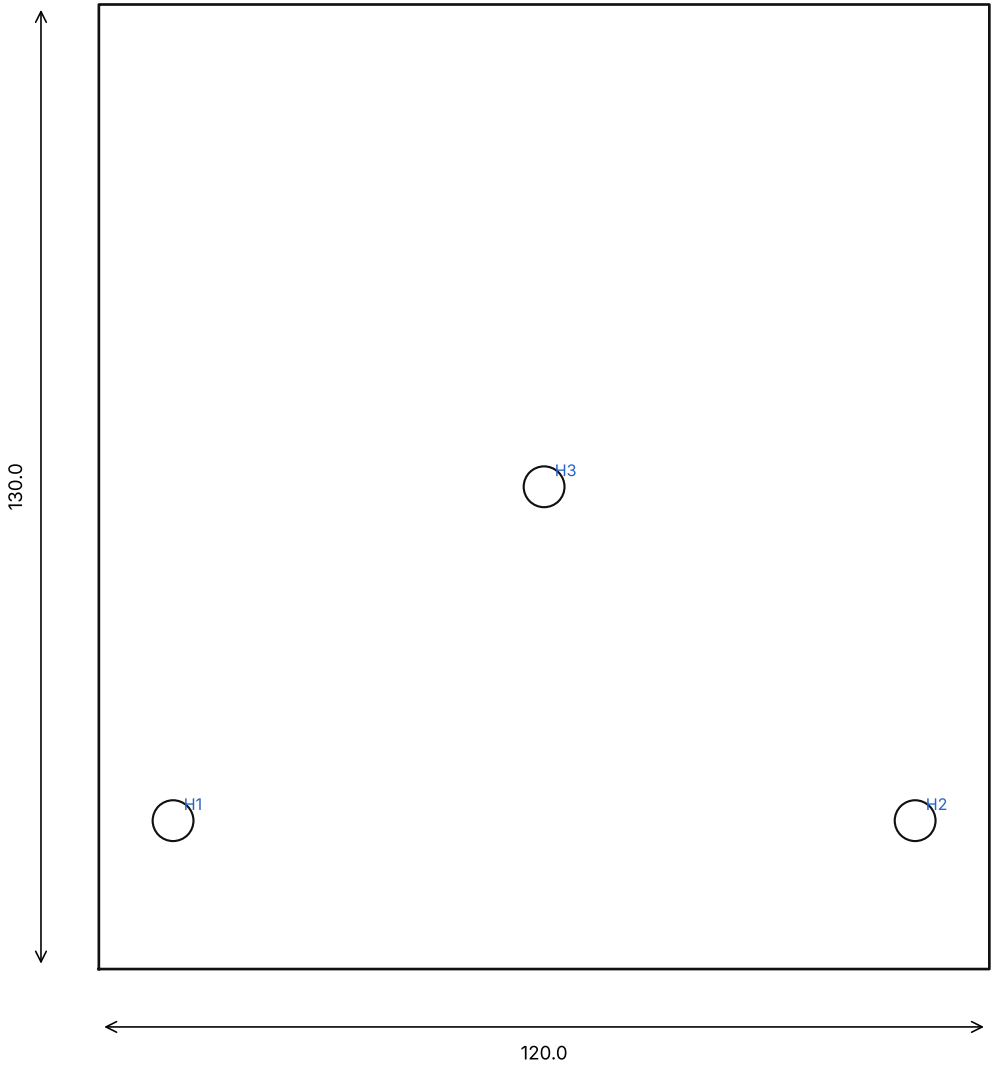


Make: RF_front_cross
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | RF_front_cross | Al5083 t=10 mm | qty 1 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

RF_side_plate (datum: lower-left = (-612.5, 65.0) in the part frame)

hole	u	v	dia
H1	-275.0	85.0	5.50
H2	-275.0	175.0	5.50
H3	-370.0	85.0	5.50
H4	-430.0	85.0	5.50
H5	-520.0	85.0	5.50
H6	-520.0	175.0	5.50
H7	-600.0	85.0	5.50
H8	-600.0	175.0	5.50

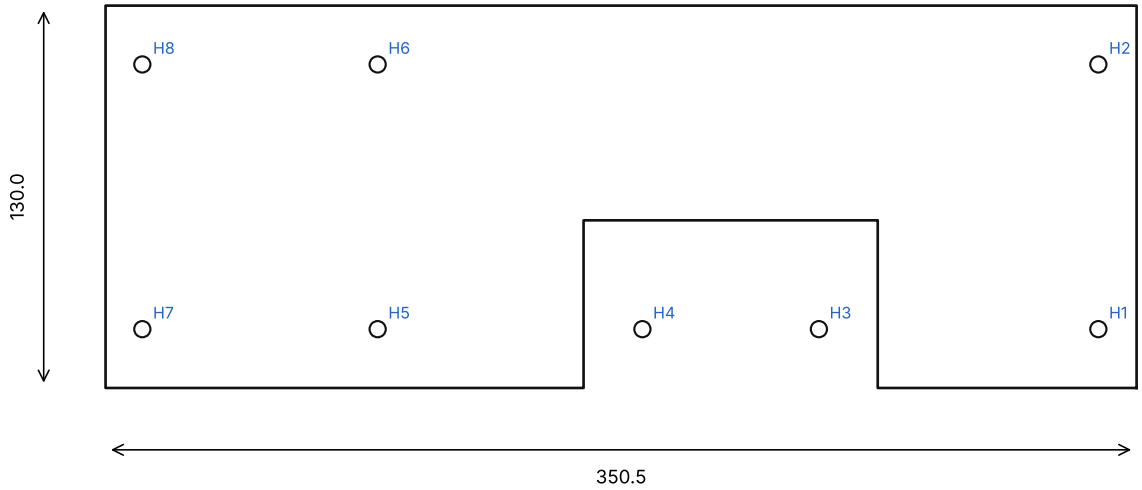


Make: RF_side_plate_L, RF_side_plate_R
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | RF_side_plate | Al5083 t=5 mm | qty 2 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

RF_trunnion (datum: lower-left = (-55.0, 40.0) in the part frame)

hole	u	v	dia
H1	0.0	82.5	10.20

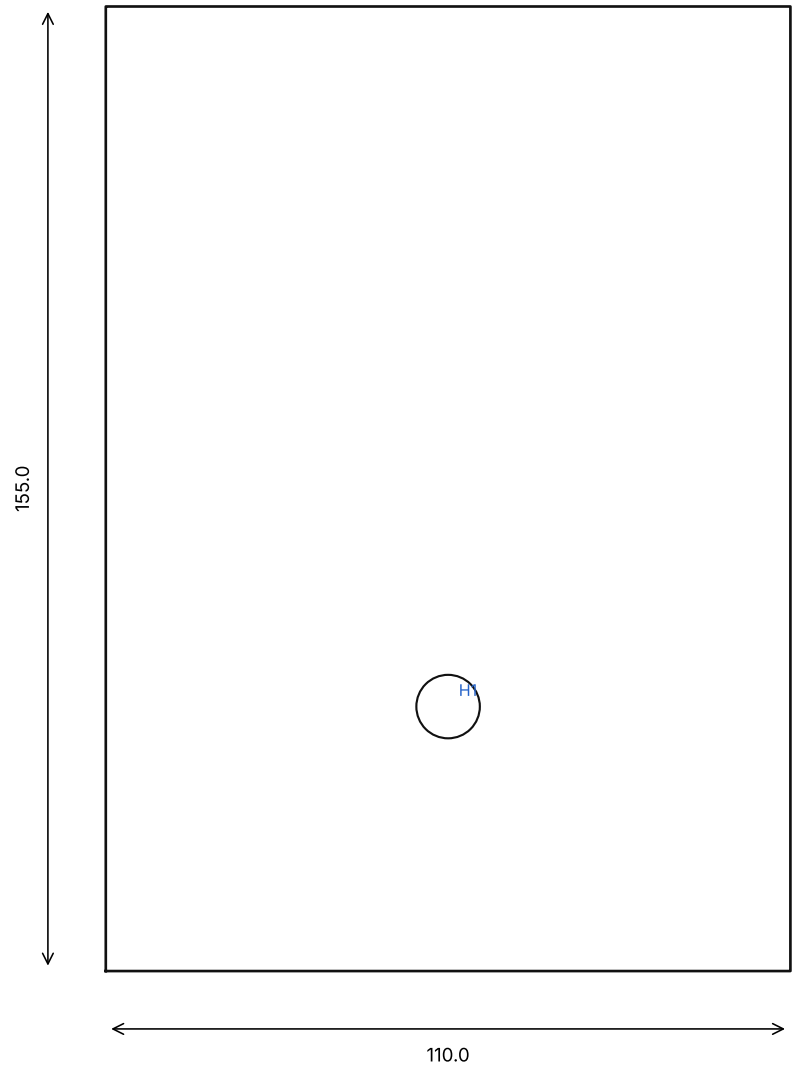


Make: RF_trunnion_F, RF_trunnion_R
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | RF_trunnion | Al5083 t=5 mm | qty 2 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

hole	u	v	dia
H1	0.0	0.0	8.20
H2	47.9	0.0	8.20

TL_h_link (datum: lower-left = (-10.0, -9.0) in the part frame)

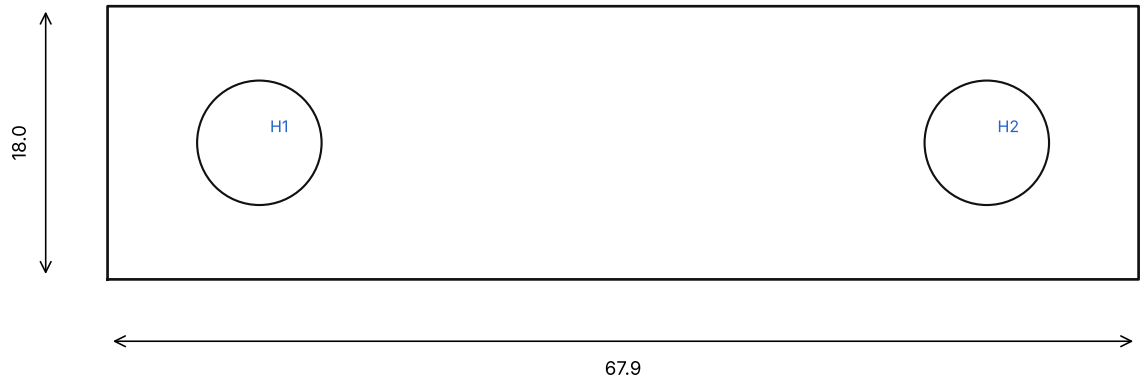

Make: TL_h_link_L, TL_h_link_R
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | TL_h_link | S235 t=3 mm | qty 2 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

hole	u	v	dia
H1	0.0	0.0	8.20
H2	71.8	0.0	8.20

TL_side_link (datum: lower-left = (-10.0, -9.0) in the part frame)




Make: TL_side_link_L, TL_side_link_R
Laser/waterjet from the DXF of the same name.
Holes for pins: ream to H8 after cutting.

KAUHA 1:8 testbed | TL_side_link | S235 t=3 mm | qty 2 | laser cut

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm.

BK_shell flat pattern 331.1 × 331.5 mm, 3 bends, inner radius 1.5 mm, K = 0.44

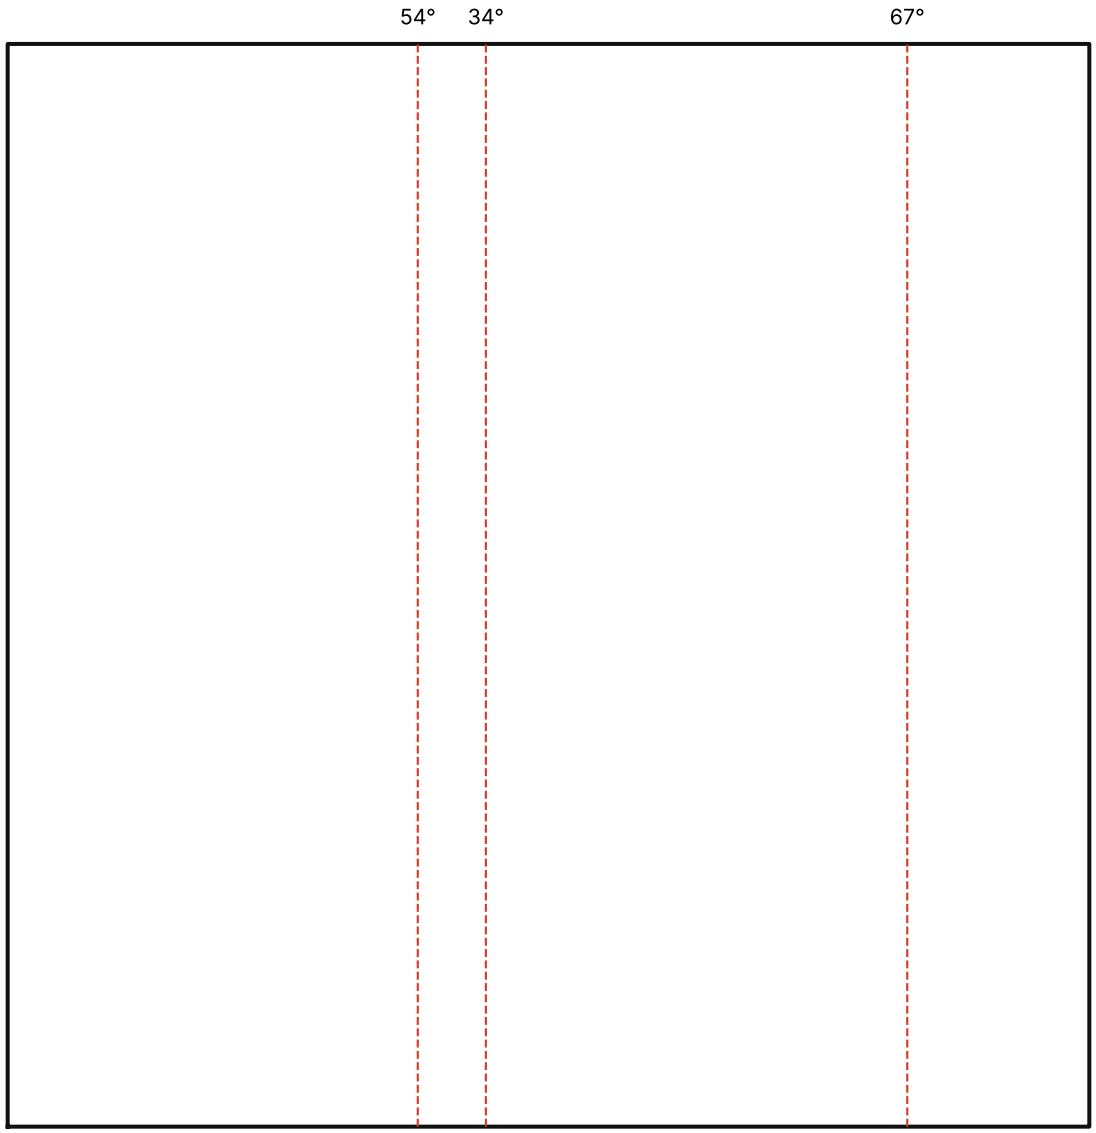

KAUHA 1:8 testbed | BK_shell | S235 t=1.5 mm | qty 1 | laser cut + press brake

General tolerances ISO 2768-m. Break sharp edges 0.3 mm. Units mm. Weld side plates and cutting edge after bending; check the profile with a printed template.