


Features for this driver:
> ULN2003A chip
> 5 pin motors (28BYJ-48 specifically)
> Dual power input (terminals or power jack – from adapter)
> Back-feed protection
Improvements – next version:
> Fuse protection (PTC)
> Put MOSFETs for reverse polarity protection
> Use one power source for up to 5 motor drivers (connected to each other)
> Add USB-C as a power source (5V)

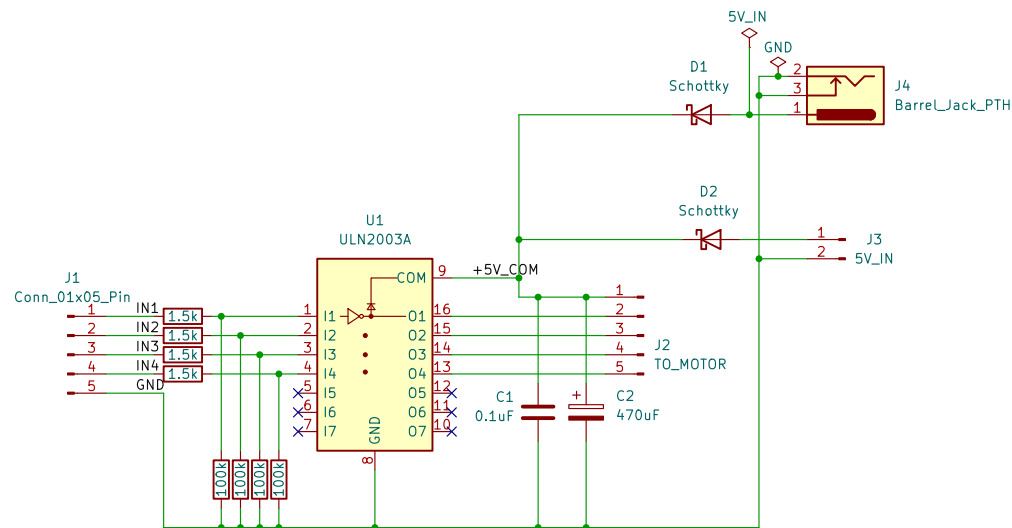

Sheet: /
File: motor_driver.kicad_sch

Title: motor_driver

Size: A4 Date: 02-03-2026

KiCad E.D.A. 9.0.7

Rev: 1.0

Id: 1/1