Residential

Rack-mount Energy Storage System

LT5000

5.12 kWh------158.72 kWh





Key Features

Safety
Tier-1 LifePo4 Battery with Intelligent BMS for Safety and Performance

Reliability
Battery& BMSR&D Since 2014,
80,000 Battery Modules in 90+ Countries

High Usable Capacity
100% Usable Capacity

Easily Scalable
Supports Parallel Connection of up to 31 Units for Maximum Capacity of 158.72 kWh"

Intelligent Management
App-based Monitoring and Analysis, Remote Diagnosis, and OTA Updates

High adaptability
Flexible configuration and strong product adaptability

www.life-tech.es info@life-tech.es

Main Parameters

	LT5000
Cell Model (Ah)	100Ah/3.2V
Combination Mode	16S1P
Nominal Capacity (Ah)	100
Rated Energy(kWh)	5.12
Initial Internal Resistance (mΩ)	＜ 50
Rated Voltage (V)	51.2
Charge Cut-off Voltage (V)	59.2
Discharge Cut-off Voltage (V)	43.2
Standard Charge Current (A)	20
Max.Charge Current (A)	95
Standard Discharge Current (A)	50
Max.Discharge Current (A)	95
Operating Temperature (℃)	Charge 0℃ ~ +50℃ Discharge -20 ℃ ~ +50℃
Life Cycle	8000 times
Communication	RS485/CAN/WIFI
Weight (kg)	45±1
L×W×H (mm)	420×440×132
Certification	CEI0-21/CE/UKCA/IEC 62619/UN 38.3/MSDS
Compatible Inverter Brands:	Growatt, Ingeteam, GOODWE, SOFAR, Deye, solis, Sol-Ark, LUX POWER TEK, Green Cell, SAJ, STUDER, Afore 艾伏, SMA, Schneider Electric, phocos, victron energy, MUST Power Systems, SUN SYNK


Effect Display






System Layout

Stack mode

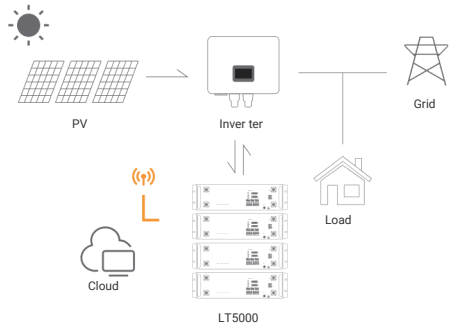

Wall-mount mode

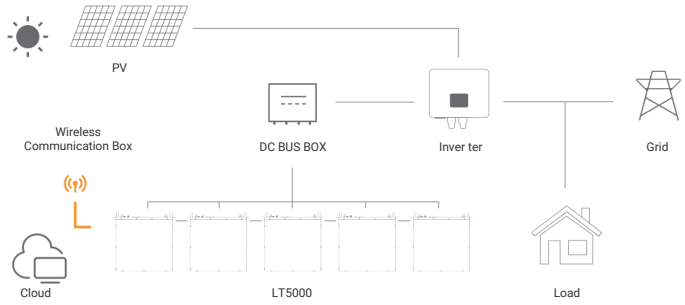

- Peak Shaving
- Energy Surplus
- Self-Consumption
- Energy Outage


Size



Rackless : 420mm*440mm*132mm
Rack-Mounted : 420mm*446mm*148.2mm



Packaging And Shipping Details

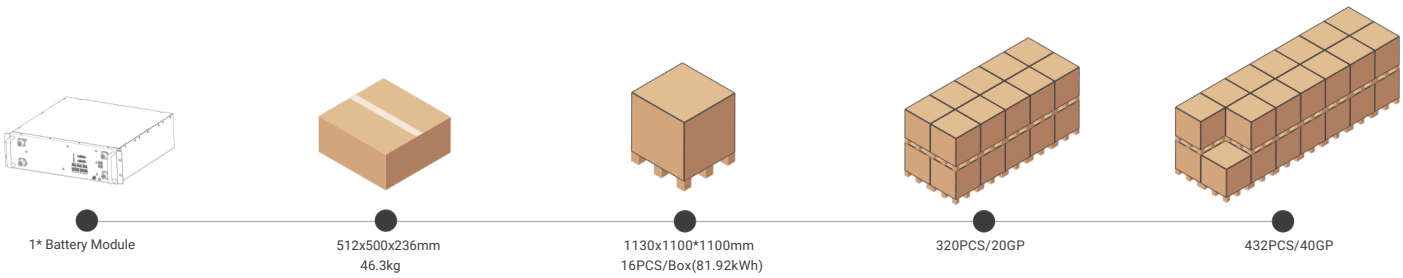

1* Battery Module

512x500x236mm
46.3kg

1130x1100*1100mm
16PCS/Box(81.92kWh)

320PCS/20GP

432PCS/40GP