

Connex

Networking processes, connecting systems, showing production states, integrating machines in business processes – the Connex workflow solution is the answer to new requirements in a Smart Factory. Utilizing a modular system of standard modules allows highly customized applications, optimized for individual purpose.

Connex Info Cloud

Connex Info Cloud enables you to produce your print products even more (cost)efficiently, to analyze your production in a targeted manner, to identify optimization potential for your production, and to increase your planning reliability. Because it is important to know which order is currently being produced where, how much has been produced and what the idle times, setup times or stop times look like.

Connex LineControl

Shorter job run lengths and an increasing number of jobs necessitate electronic support of the classic slip sheet. Connex LineControl interconnects production equipment with higher-level systems via standard interfaces and enables automatic presetting of the machines based on digital Job tickets. Minimizing manual data input saves time and reduces sources of errors, what significantly increases overall production performance.

MM SERVICES




MM STARTUP

- Project management – comprehensive consultation for all needs
- Installation and commissioning – for a high level of process reliability
- Machine relocations



MM SUPPORT

- Telephone support – 24/7 access to our technical hotline and spare parts
- Repair service – carried out professionally
- Remote services – efficient online troubleshooting



MM PARTS

- Spare parts – high availability at your local service center and quick access to all Muller Martini spare parts in the plants




MM INSPECT

- Inspection – comprehensive analysis and extensive function testing
- Maintenance – regular, proactive maintenance pays off



MM IMPROVE

- Training – professional training at the Muller Martini training centers
- Production support – consultation on efficiency-enhancing programs



MM UPTO DATE

- Updates – long-lasting efficiency and productivity
- Retrofits and extensions – to keep you competitive



MM SELECT

- Customized service contracts – efficient life cycle management to ensure the high reliability and uptime of your equipment




Follow us on:
youtube.com/
muellermartini1



Muller Martini AG
Untere Brühlstrasse 17
4800 Zofingen, Switzerland
Phone +41 62 745 45 45
info@muellermartini.com
www.muellermartini.com

MÜLLER MARTINI

Perfect Binder
Publica PRO

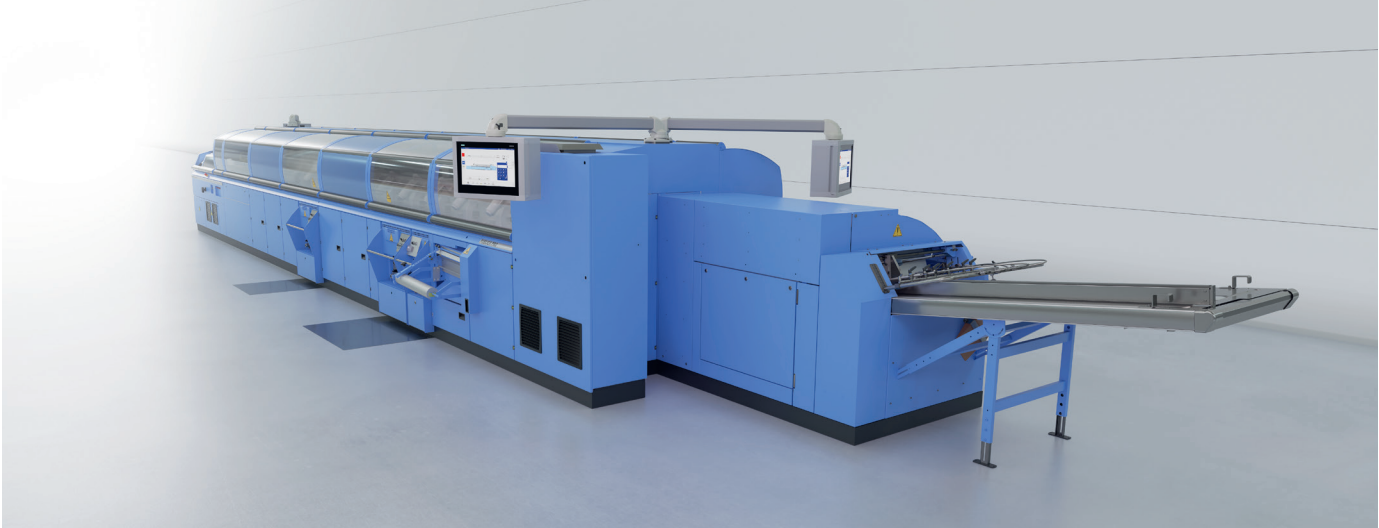


High performance for perfect bound products

The Publica PRO perfect binder generation impresses with high net output of top-quality products and the shortest changeover times thanks to optimized processes. In addition to proven strengths such as straight infeed, spine processing, stream cover feeder SAL 414, and pressing stations, the Publica PRO offers print shops with their own postpress operations and bookbinders numerous innovations: swivel-mounted touchscreens, intuitive CoPilot system, automatic clamp chain tensioning, automatic glue film length adjustment on the spine gluing unit, diagonally arranged side gluing unit discs and optimized cover transport. The binder generation for periodicals, catalogs and magazines with long print runs is available in three performance classes: 12,000 (PRO12), 15,000 (PRO15), and 18,000 (PRO18) cycles per hour. With the PRO12 and the selected options lining station and end sheet gluer VA 424 hardcover book blocks can also be produced. The Publica PRO also offers a wide range of glue application systems: roller application and PUR nozzle.




HIGHLIGHTS

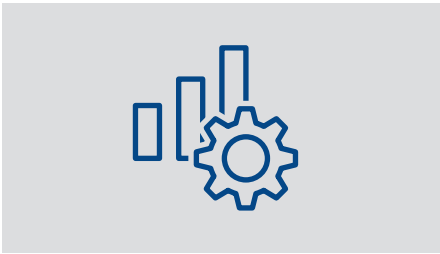


Productivity

The maximum output of up to 18,000 cycles/hour gives the Publica PRO18 a unique selling point.

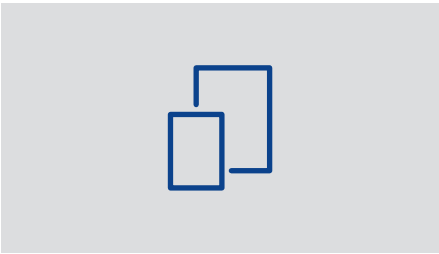

Wide format spectrum

The Publica PRO12 is very flexible with a maximum spine length of up to 510 mm as well as a block thickness of 80 mm.

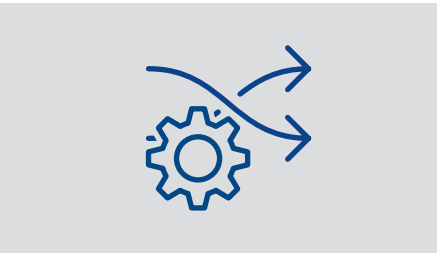

Soft- and Hardcover

The use of the backlining station & VA 424 allows a fast changeover to hardcover block production.

Your strong partner.

MÜLLER MARTINI

TECHNICAL DATA

Publica models		PRO12	PRO15	PRO18
Machine speed*	mechanical	12 000 cycles/h	15 000 cycles/h	18 000 cycles/h
Clamp pitch		24"	21"	18"
Number of clamps		20, 25, 30	24, 30, 36	40
Infeed channel width	max.	93 mm	82 mm	71 mm
Product sizes				
Spine length	max.	510 mm	420 mm	360 mm
	min.	105 mm	105 mm	140 mm
Book width	max.	320 mm	320 mm	320 mm
	min.	100 mm	100 mm	100 mm
Book thickness	max.	80 mm	70 mm	60 mm
	min.	1.5 mm	1.5 mm	1.5 mm
Cover width open	max.	710 mm	710 mm	700 mm
	min.	203 mm	203 mm	203 mm
Book hang-out	max.	20 mm	20 mm	20 mm
	min.	8 mm	8 mm	8 mm

Hotmelt-Premelter free-standing		
Spine-/side gluing unit (JumboFlex 50;100/ Concept B30)	Capacity	50;100/ 30 l
	Feed rate	max. 50;100/ 30 l/h**
	Power req.	20.1;37.2/ 6 kW
MOD 40 (PUR-roller/-nozzle application)	PUR-block size	Diameter 270 - 285 mm Hight 270 - 320 mm
	Tank opening	Ø 290 mm
	Feed rate	max. 50 kg/h**
	Power req.	13 kW


* The maximum possible net output depends on several parameters. The characteristics of the paper being processed – such as the paper texture, the grammage, the folding quality, the electrostatic behavior and the size – affect product processing as do environmental factors, the expertise of the machine operator, etc.

** Reference value, melting capacity depends on adhesive.

Cover feeder SAL 414		PRO12				PRO15	PRO18
		Brochure/ Gluing	Block/ Brochure	Swiss- Brochure*	Pre-folded covers	Brochure/ Gluing	Brochure/ Gluing
A	min. max.	203 mm 710 mm	213 mm 710 mm	297 mm 710 mm	203 mm 700 mm	203 mm 710 mm	203 mm 700 mm
B	min. max.	105 mm 510 mm	105 mm 510 mm	105 mm 510 mm	115 mm 510 mm	105 mm 420 mm	140 mm 360 mm
C	min. max.	1.5 mm 80 mm	1.5 mm 80 mm	1.5 mm 80 mm	1.5 mm 80 mm	1.5 mm 70 mm	1.5 mm 60 mm
D	min. max.	100 mm 320 mm	105 mm 320 mm	147 mm 320 mm	100 mm 320 mm	100 mm 320 mm	100 mm 320 mm
E	min. max.	103 mm 390 mm	108 mm 390 mm	150 mm 390 mm	-	103 mm 390 mm	103 mm 380 mm
F	min. max.	-	-	-	50 mm 225 mm	-	-
G	min.	-	-	-	10 mm	-	-
H	min.	-	-	-	10 mm	-	-
I	min.	-	-	-	13 mm	-	-

* Lay-flat binding method I + II

PRODUCTS

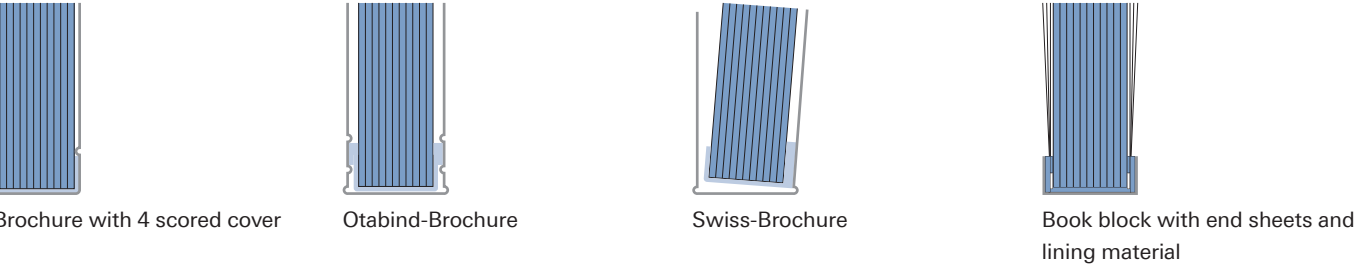

AUTOMATIC COVER RECOGNITION


The following parameters can be encrypted in the barcode	Supported barcode type
Cover Recognition System	1D and 2D Code (in longitudinal or crosswise arrangement)
	Picture mode
	Text mode

CONFIGURATIONS AND OPTIONS

Configurations	Inline production (product infeed by upstream gathering machine (optional: end sheet gluer VA 424))	
Optional features	Upstream end sheet gluer VA 424	EVA-hotmelt side gluing unit
	Cold glue spine gluing unit (PRO12)	PUR-hotmelt nozzle side gluing system
	"Twinflex" cold glue spine gluing unit (PRO12)	Lining station (PRO12)
	EVA-hotmelt spine gluing unit	Additional IR-heater
	PUR-hotmelt-glue spine gluing unit	Book Data Center (BDC)
PUR spine glue nozzle type VPN 8		

LAYOUT

- 1 Infeed section with jogging and resting section
- 2 Milling station
- 3 Spine processing stations
- 4 Spine gluing units
- 5 Side gluing units
- 6 Lining station
- 7 IR-heating (in the curve area)
- 8 Stream cover feeder SAL 414
- 9 Scoring station
- 10 Pressing roller and 1st & 2nd pressing station
- 11 Delivery with laying down device
- 12 Product reject unit with quality control

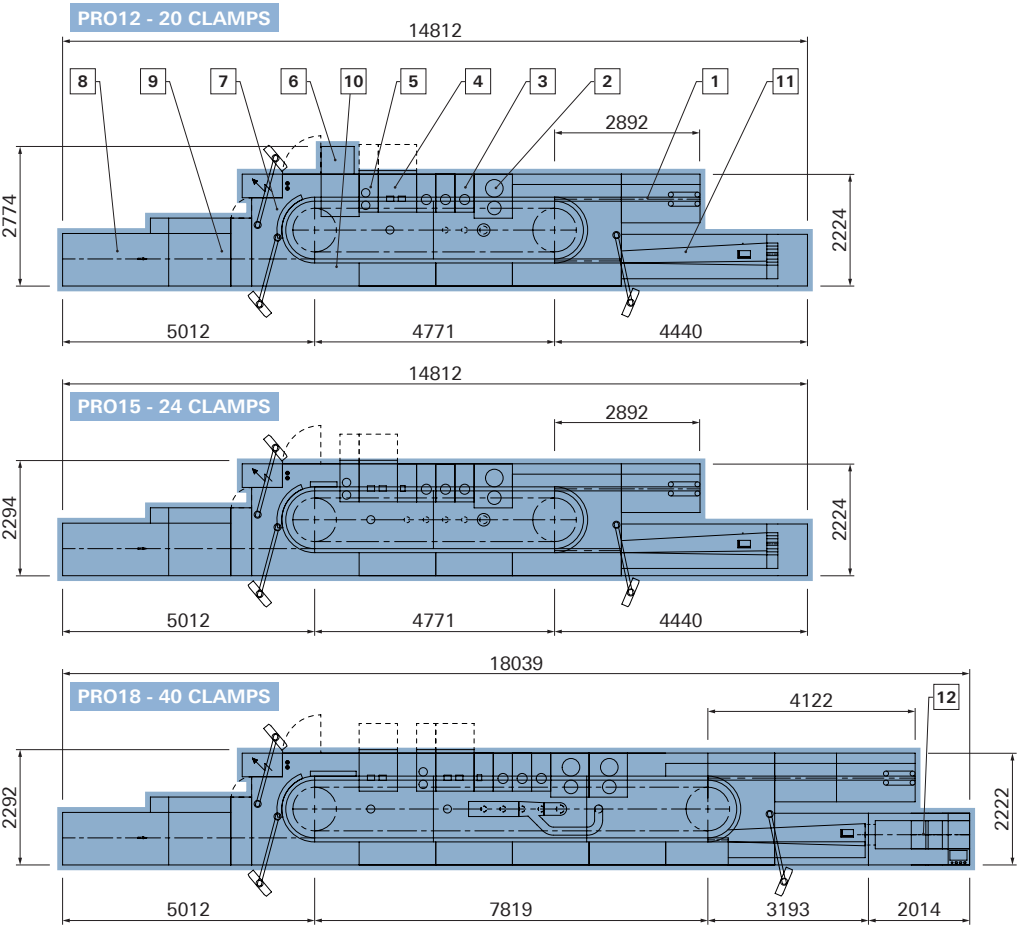

UTILITY REQUIREMENTS

Electrical	Voltage	400V Y 3~ N/PE +- 10%
	Frequency	50 / 60 Hz +- 2%
	Protection from customer side*	125 A
	Max power consumption*	57 kVA
Pneumatical	Air consumption	
Machine (following parts are excluded)*	Compressed air	55,7 Nm³/h, 6 bar
Central lubricating system*	Compressed air	0,7 Nm³/h, 6 bar
PUR-Premelter MOD 40 VPN	Compressed air	1 Nm³/h, 6 bar
Lining station	Compressed air	5 m³/h, 6 bar
Cover feeder SAL 414	Compressed air	35 Nm³/h, 6 bar
Extraction (waste)		
Spine processing stations	Air consumption	3700 m³/h
complete (with 1 milling station)	Vacuum	min. 1800 Pa
Spine processing stations	Air consumption	5500 m³/h
complete (with 2 milling stations)	Vacuum	min. 800 Pa
Extraction (fume)		
Hotmelt fume (1 spine- and 1 side gluing unit combined)	Air consumption	400 m³/h
	Vacuum	min. 200 Pa
Hotmelt fume (1 additional back gluing unit)	Air consumption	300 m³/h
	Vacuum	min. 200 Pa
Important	Air must be oil- and waterfree The compressor must be sourced locally ISO 8573-1:2010 7/4/4	

* Calculations are based on the standard configuration. Requirements may change depending on configuration.