


DL284 series

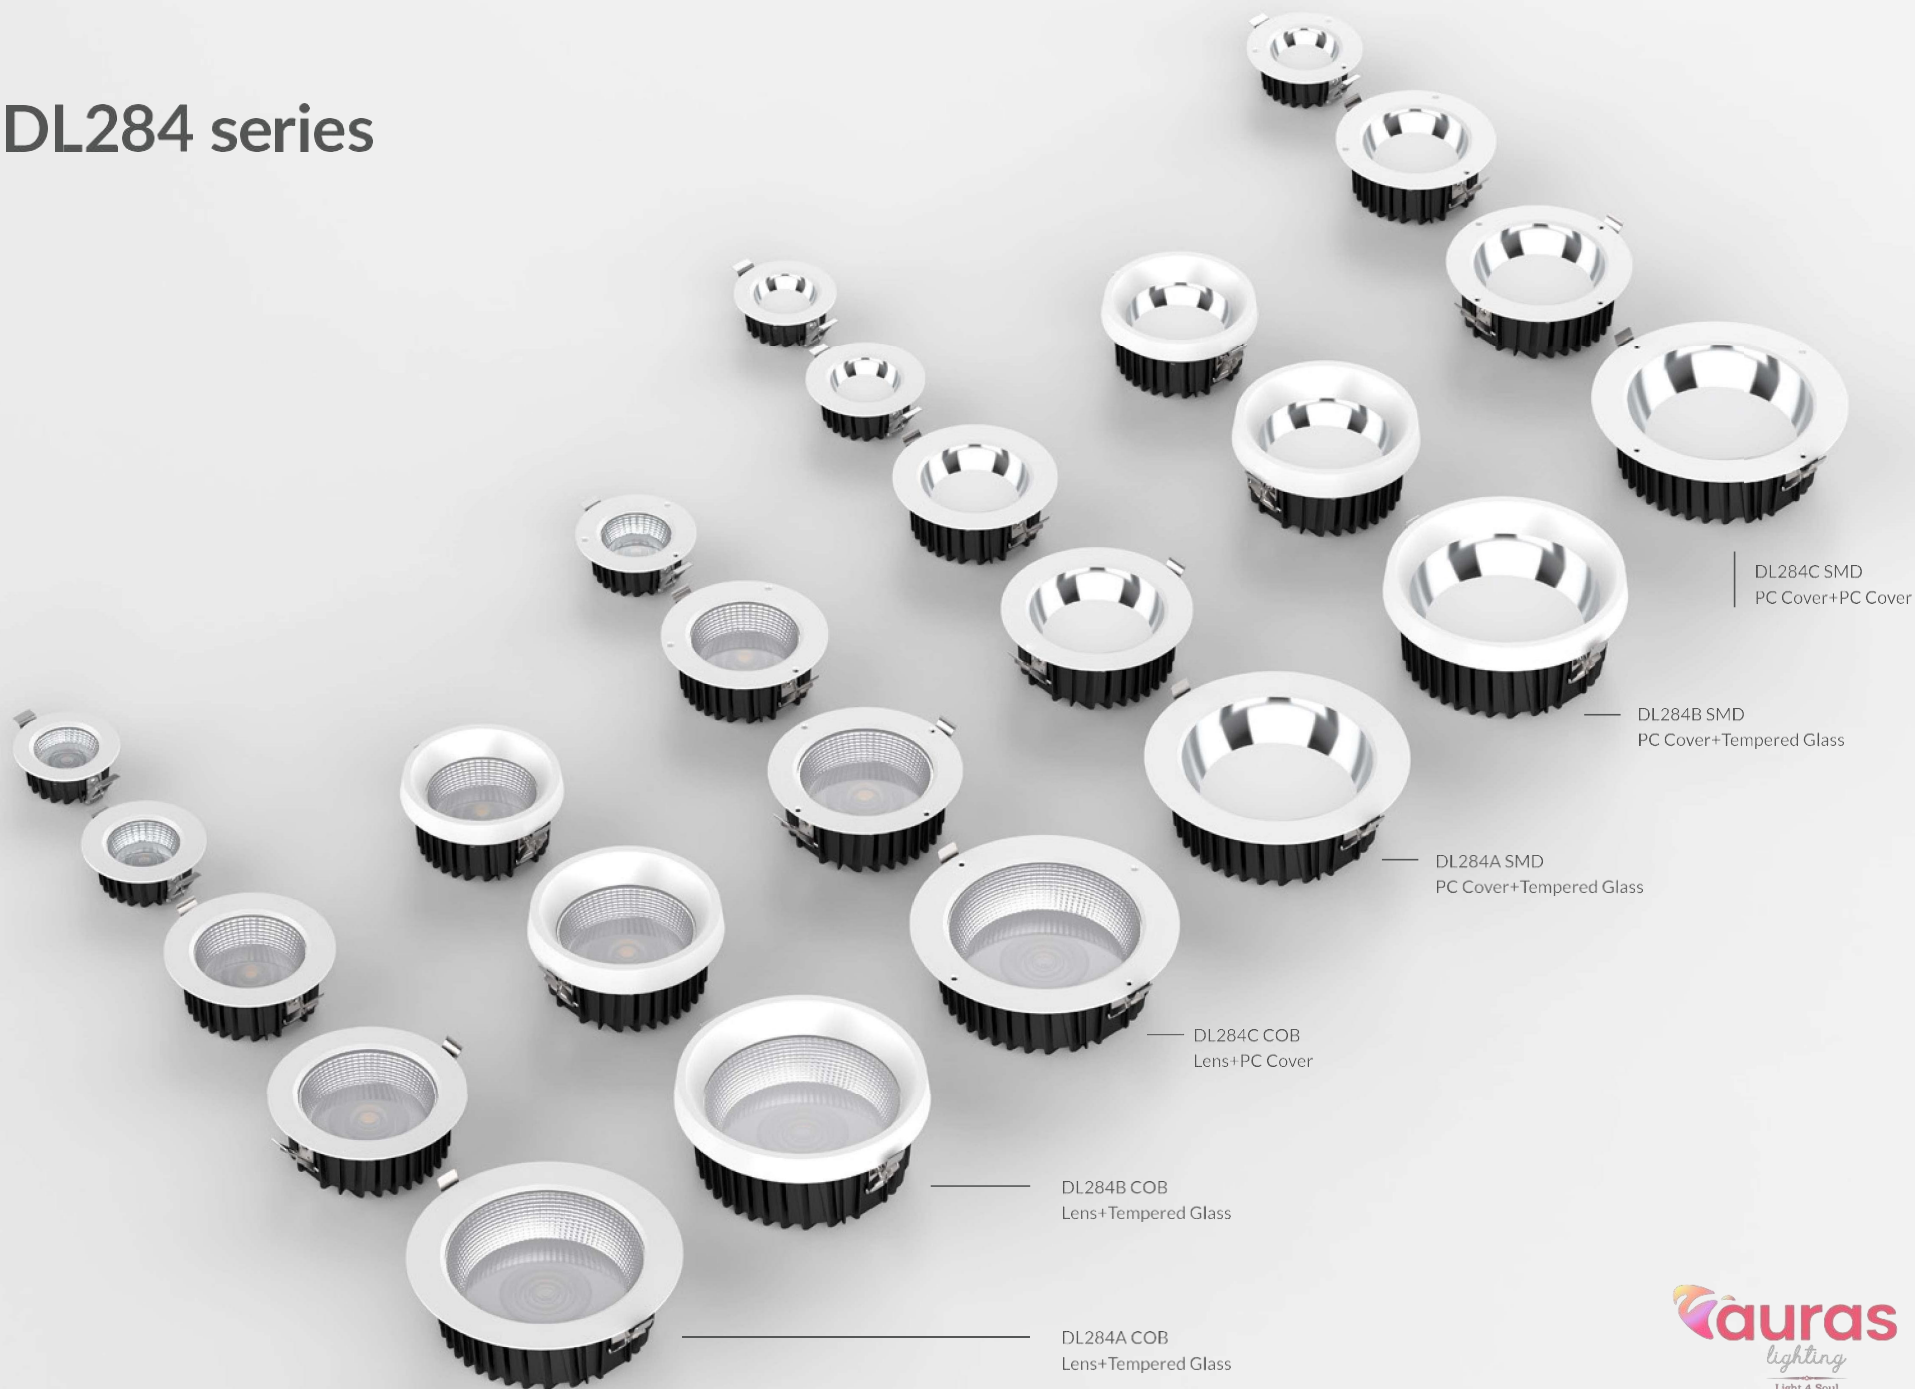

IP65 WATERPROOF

COB - Faceted


Beam Angle: 24° / 36° / 60°

DL284A: Tempered glass **IK06**(2.5"/3")
IK08 4"/6"/8"

DL284B: Extend frame
Tempered glass **IK08**

DL284C: Special anti-theft screws
PC cover **IK10**

SMD -Specular
Beam Angle: 75°(3") 90°(4"/6"/8")

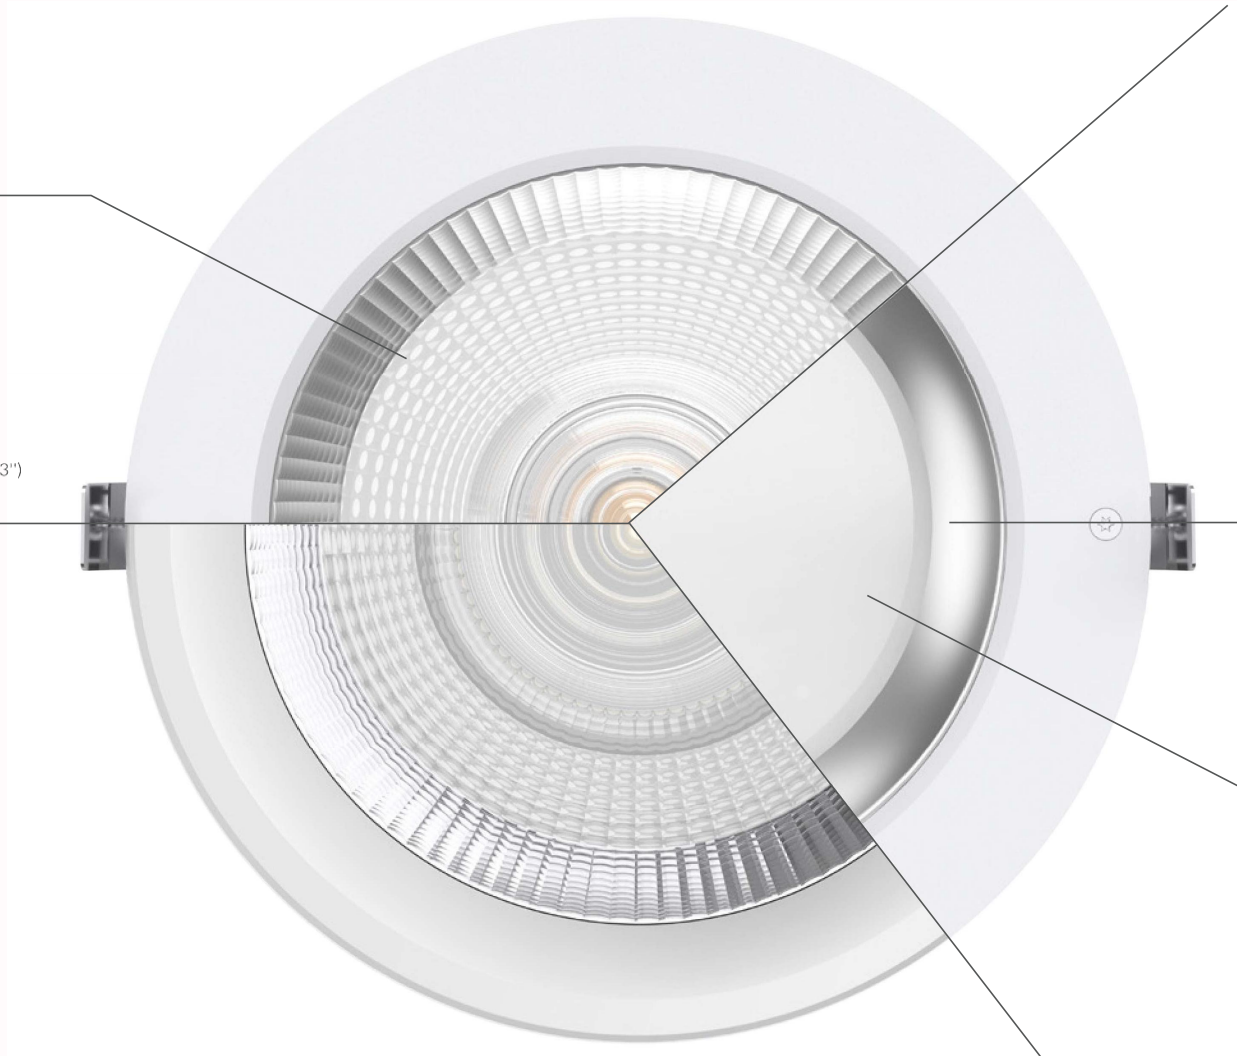

PRO




DL284A




DL284B

DL284A/B

Downlight COB



DL284A COB series downlight with traditional deep Faceted reflector which provides a perfect combination of high lighting efficiency, comfortable lighting and low glare design, without compromising on lighting performance (color rendering and color uniformity). ADC12 aluminum housing provides a great thermal management, IP65 waterproof with high protection level, which offers a wider application area. It is with tempered glass as IK06/IK08. Based on DL284A, DL284B added the extend frame which looks like a slim surface mounted downlight.

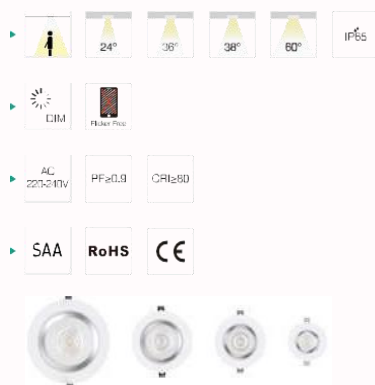

Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL284A-3-10W	10W	Ø110x51	Ø90-Ø95	1050lm	0.34	30PCS
DL284A-3-13W	13W	Ø110x51	Ø90-Ø95	1350lm	0.34	30PCS
DL284A/B-4-18W	18W	Ø150x64/ Ø145x82	Ø125-140/ Ø125-135	1950lm	0.62/0.72	12PCS
DL284A/B-4-25W	25W	Ø150x64/ Ø145x82	Ø125-140/ Ø125-135	2750lm	0.62/0.72	12PCS
DL284A/B-6-18W	18W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	1950lm	0.79/0.90	12PCS
DL284A/B-6-25W	25W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	2750lm	0.79/0.90	12PCS
DL284A/B-6-30W	30W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	3500lm	0.79/0.90	12PCS
DL284A/B-8-18W	18W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	1950lm	1.27/1.45	6PCS
DL284A/B-8-25W	25W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	2750lm	1.27/1.45	6PCS
DL284A/B-8-35W	35W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	3850lm	1.27/1.45	6PCS

CCT — 2700K 3000K 4000K 5000K


Trim — White Black

PRO




DL284C

Downlight COB



DL284C COB series downlight with traditional deep Faceted reflector which provides a perfect combination of high lighting efficiency, comfortable lighting and low glare design, without compromising on lighting performance (color rendering and color uniformity). ADC12 aluminum housing provides a great thermal management, IP65 waterproof with high protection level, which offers a wider application area. It is with high transmittance PC, the lamp cover is fixed with special anti-theft screws, so that the lamp can be used in special places. The strong structure design makes IP65 and IK10 high protection level.

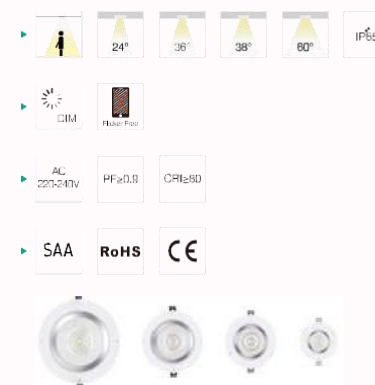

Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL284C-3-10W	10W	Ø110x51	Ø90-Ø95	1050lm	0.34	30PCS
DL284C-3-13W	13W	Ø110x51	Ø90-Ø95	1350lm	0.34	30PCS
DL284C-4-18W	18W	Ø150x64	Ø125-140	1950lm	0.62	12PCS
DL284C-4-25W	25W	Ø150x64	Ø125-140	2750lm	0.62	12PCS
DL284C-6-18W	18W	Ø172x69	Ø150-165	1950lm	0.79	12PCS
DL284C-6-25W	25W	Ø172x69	Ø150-165	2750lm	0.79	12PCS
DL284C-6-30W	30W	Ø172x69	Ø150-165	3500lm	0.79	12PCS
DL284C-8-18W	18W	Ø235x81	Ø200-220	1950lm	1.27	6PCS
DL284C-8-25W	25W	Ø235x81	Ø200-220	2750lm	1.27	6PCS
DL284C-8-35W	35W	Ø235x81	Ø200-220	3850lm	1.27	6PCS

CCT — 2700K 3000K 4000K 5000K

Trim — White Black

PRO



DL284A




DL284B

PRO




DL284A/B

Downlight SMD

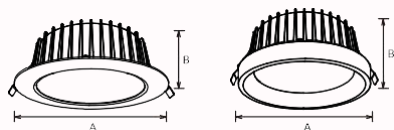

DL284A SMD series downlight with traditional deep Specular reflector which provides a perfect combination of high lighting efficiency, comfortable lighting and low glare design, without compromising on lighting performance (color rendering and color uniformity). ADC12 aluminum housing provides a great thermal management, IP65 waterproof with high protection level, which offers a wider application area. CCT changeable available. It is with tempered glass as IK06/IK08. Based on DL284A, DL284B added the extend frame which looks like a slim surface mounted downlight.




Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL284A-3-10W	10W	Ø110x51	Ø90-Ø95	950lm	0.34	30PCS
DL284A-3-13W	13W	Ø110x51	Ø90-Ø95	1300lm	0.34	30PCS
DL284A/B-4-18W	18W	Ø150x64/ Ø145x82	Ø125-140/ Ø125-135	1950lm	0.62/0.72	12PCS
DL284A/B-4-25W	25W	Ø150x64/ Ø145x82	Ø125-140/ Ø125-135	2750lm	0.62/0.72	12PCS
DL284A/B-6-18W	18W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	1950lm	0.79/0.90	12PCS
DL284A/B-6-25W	25W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	2750lm	0.79/0.90	12PCS
DL284A/B-6-30W	30W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	3500lm	0.79/0.90	12PCS
DL284A/B-8-18W	18W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	1950lm	1.27/1.45	6PCS
DL284A/B-8-25W	25W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	2750lm	1.27/1.45	6PCS
DL284A/B-8-35W	35W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	3850lm	1.27/1.45	6PCS

CCT — 3000K 4000K 5000K 5700K


Trim — White Black

DL284C

Downlight SMD



DL284C SMD series downlight with traditional deep Specular reflector which provides a perfect combination of high lighting efficiency, comfortable lighting and low glare design, without compromising on lighting performance (color rendering and color uniformity). ADC12 aluminum housing provides a great thermal management, IP65 waterproof with high protection level, which offers a wider application area. CCT changeable available. It is with high transmittance PC, the lamp cover is fixed with special anti-theft screws, so that the lamp can be used in special places. The strong structure design makes IP65 and IK10 high protection level.



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL284C-3-10W	10W	Ø110x51	Ø90-Ø95	1050lm	0.34	30PCS
DL284C-3-13W	13W	Ø110x51	Ø90-Ø95	1350lm	0.34	30PCS
DL284C-4-18W	18W	Ø150x64	Ø125-140	1950lm	0.62	12PCS
DL284C-4-25W	25W	Ø150x64	Ø125-140	2750lm	0.62	12PCS
DL284C-6-18W	18W	Ø172x69	Ø150-165	1950lm	0.79	12PCS
DL284C-6-25W	25W	Ø172x69	Ø150-165	2750lm	0.79	12PCS
DL284C-6-30W	30W	Ø172x69	Ø150-165	3500lm	0.79	12PCS
DL284C-8-18W	18W	Ø235x81	Ø200-220	1950lm	1.27	6PCS
DL284C-8-25W	25W	Ø235x81	Ø200-220	2750lm	1.27	6PCS
DL284C-8-35W	35W	Ø235x81	Ø200-220	3850lm	1.27	6PCS

CCT — 3000K 4000K 5000K 5700K

Trim — White Black