

228 Series

Surface mounted
DL228A



Track spot surface
DL228B



TL228
with ceiling box




Suspension
PD228



Track light
TL228


Suspension
PD228B

Suspension
PD228B

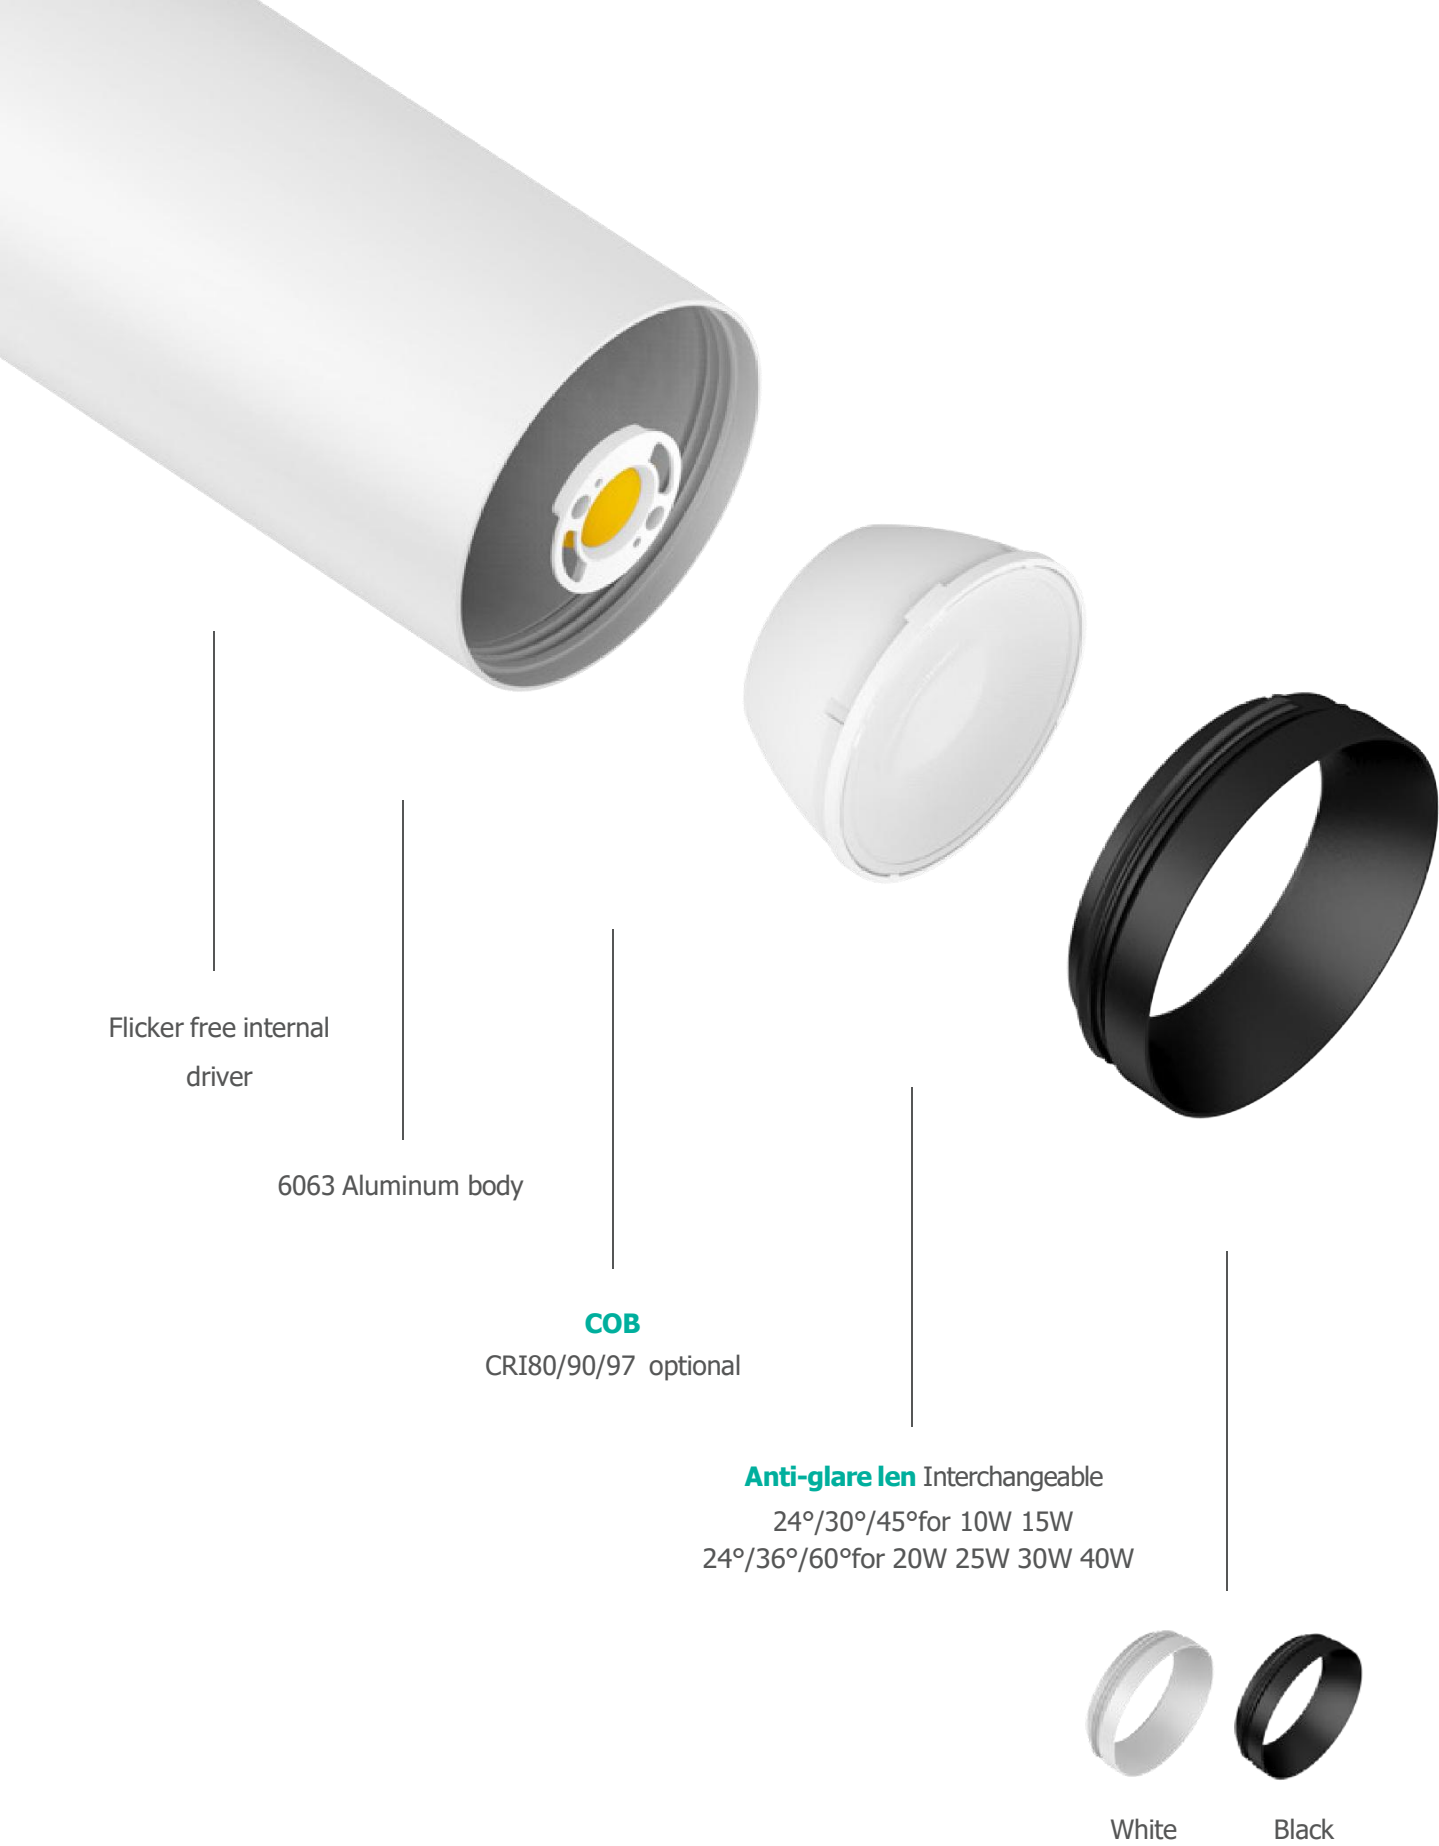




DL228A Downlight



DL228A adopt high lumen COB chip and PMMA lens for uniform light effect and enhanced glare control. Aluminum profile with sufficient heat dissipation guarantee long lifespan. It offers a wide choice of beam angles 24°/30°/36°/45°/60° for optional.

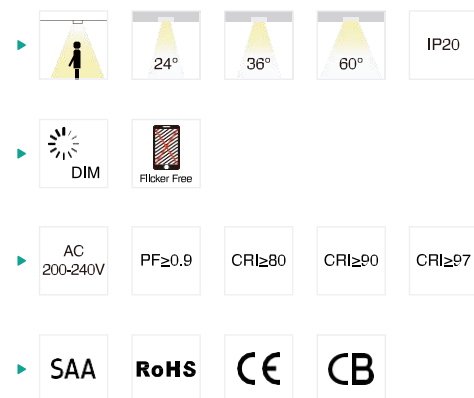


| Code | Watt | Size(AxBmm) | Lumen(±5%) | N.W/pc(kgs) | Q'ty/CTN |
|------------|------|--|------------|-------------|----------|
| DL228A-10W | 10W | Ø65x157 | 1100lm | 0.45 | 12PCS |
| DL228A-15W | 15W | Ø65x157 (Non-dim) Ø85x178 (Triac-dim) | 1300lm | 0.45 | 12PCS |
| DL228A-20W | 20W | Ø85x178 | 2250lm | 0.67 | 12PCS |
| DL228A-25W | 25W | Ø85x178 | 2700lm | 0.67 | 12PCS |
| DL228A-30W | 30W | Ø100x211 | 3050lm | 1.00 | 12PCS |
| DL228A-40W | 40W | Ø100x211 | 4200lm | 1.00 | 12PCS |

CCT ——— 2700K 3000K 4000K 5000K Finish ——— White Black


Interchangeable lens options ——— 24°/30°/45° for 10W/15W 24°/36°/60° for 15W/20W/25W/30W/40W



DL228B Downlight



DL228B surface mounted downlight with adjustable lighting orientation, 350° rotate and 90° tilt. It offers a wide choice of beam angles 24°/30°/36°/45°/60° for optional. Aluminum profile with sufficient heat dissipation guarantee long lifespan. Driver built-in, easy for installation.

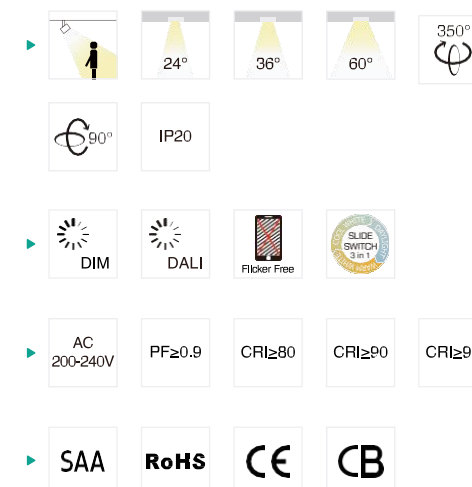


| Code | Watt | Size(AxBmm) | Lumen(±5%) | N.W/pc(kgs) | Q'ty/CTN |
|------------|------|--|------------|-------------|----------|
| DL228B-10W | 10W | Ø65x218 | 1100lm | 0.55 | 12PCS |
| DL228B-15W | 15W | Ø65x218 (Non-dim) Ø85x241 (Triac-dim) | 1300lm | 0.55 | 12PCS |
| DL228B-20W | 20W | Ø85x241 | 2250lm | 0.82 | 12PCS |
| DL228B-25W | 25W | Ø85x241 | 2700lm | 0.82 | 12PCS |
| DL228B-30W | 30W | Ø100x274 | 3050lm | 1.15 | 12PCS |
| DL228B-40W | 40W | Ø100x274 | 4200lm | 1.15 | 12PCS |

CCT ——— 2700K 3000K 4000K 5000K Finish ——— White Black


Interchangeable lens options ——— 24°/30°/45° for 10W/15W 24°/36°/60° for 15W/20W/25W/30W/40W



PD228 Downlight



PD228 pendant spot light is a high-performance LED luminaire that is ideal for commercial or residential applications. It adopts high lumen COB chip and PMMA lens for uniform light effect and enhanced glare control. AL6063 Aluminum profile with sufficient heat dissipation guarantee long lifespan.

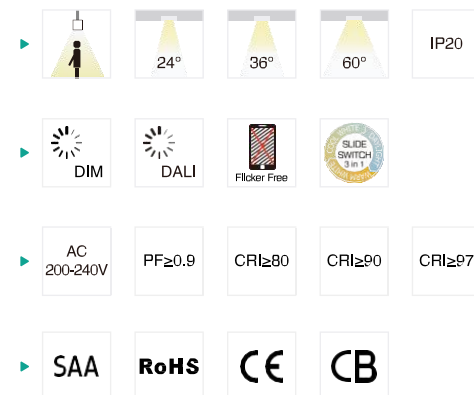

| Code | Watt | Size(AxBmm) | Lumen(±5%) | N.W/pc(kgs) | Q'ty/CTN |
|-----------|------|--|------------|-------------|----------|
| PD228-10W | 10W | Ø65x157 | 1100lm | 0.55 | 12PCS |
| PD228-15W | | Ø65x157 (Non-dim) Ø85x178 (Triac-dim) | | | 12PCS |
| PD228-20W | 20W | Ø85x178 | 2250lm | 0.80 | 12PCS |
| PD228-25W | 25W | Ø85x178 | 2700lm | 0.80 | 12PCS |
| PD228-30W | 30W | Ø100x211 | 3050lm | 1.15 | 12PCS |
| PD228-40W | 40W | Ø100x211 | 4200lm | 1.15 | 12PCS |


CCT ——— 2700K 3000K 4000K 5000K

Finish ——— White Black


Interchangeable lens options



TL228 Track light



TL228 anti-glare track light is with high lumen COB chip and PMMA lens offer an uniform lighting output, flicker free internal driver and AL6063 aluminium lamp body to ensure excellent heat dissipation. Modular lens design for different beam angle and convenient maintenance.

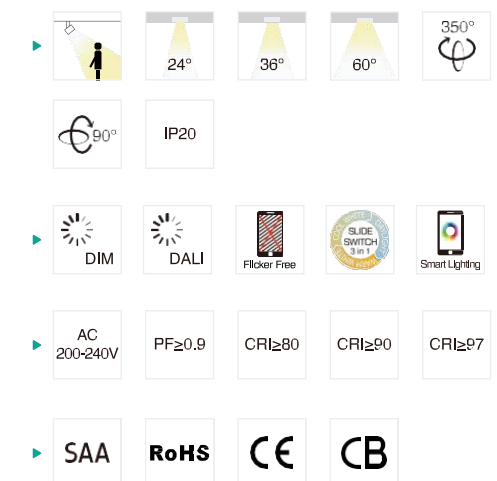

| Code | Watt | Size(AxBxCmm) | Lumen(±5%) | N.W/pc(kgs) | Q'ty/CTN |
|-----------|------|---|------------|-------------|----------|
| TL228-10W | 10W | Ø65x157x249 | 1100lm | 0.50 | 12PCS |
| TL228-15W | 15W | Ø65x157x249(Non-dim) Ø85x178x269 (Triac-dim) | 1500lm | 0.50 | 12PCS |
| TL228-20W | 20W | Ø85x178x269 | 2250lm | 0.76 | 12PCS |
| TL228-25W | 25W | Ø85x178x269 | 2700lm | 0.76 | 12PCS |
| TL228-30W | 30W | Ø100x211x302 | 3050lm | 1.10 | 12PCS |
| TL228-40W | 40W | Ø100x211x302 | 4200lm | 1.10 | 12PCS |

CCT ——— 2700K 3000K 4000K 5000K

Finish ——— White Black Silver

Interchangeable lens options

