

338 SERIES



Track light
TL338



Suspension
PD338B



Suspension
PD338A



Recessed
DL338



Surface mounted
DL338A



Track spot surface
DL338B

DIY MODULAR DESIGN


Family design



Four size options



3-CCT changeable

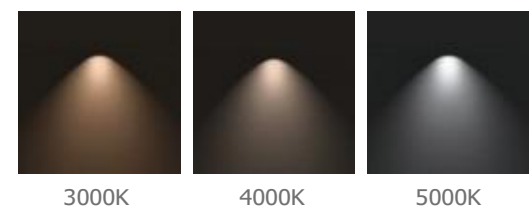


Replaceable reflector (front trim is not exchangeable)




Power adjustable

Ø65mm :10W/12W/15W
 Ø85mm :15W/20W/25W
 Ø100mm :25W/30W/35W

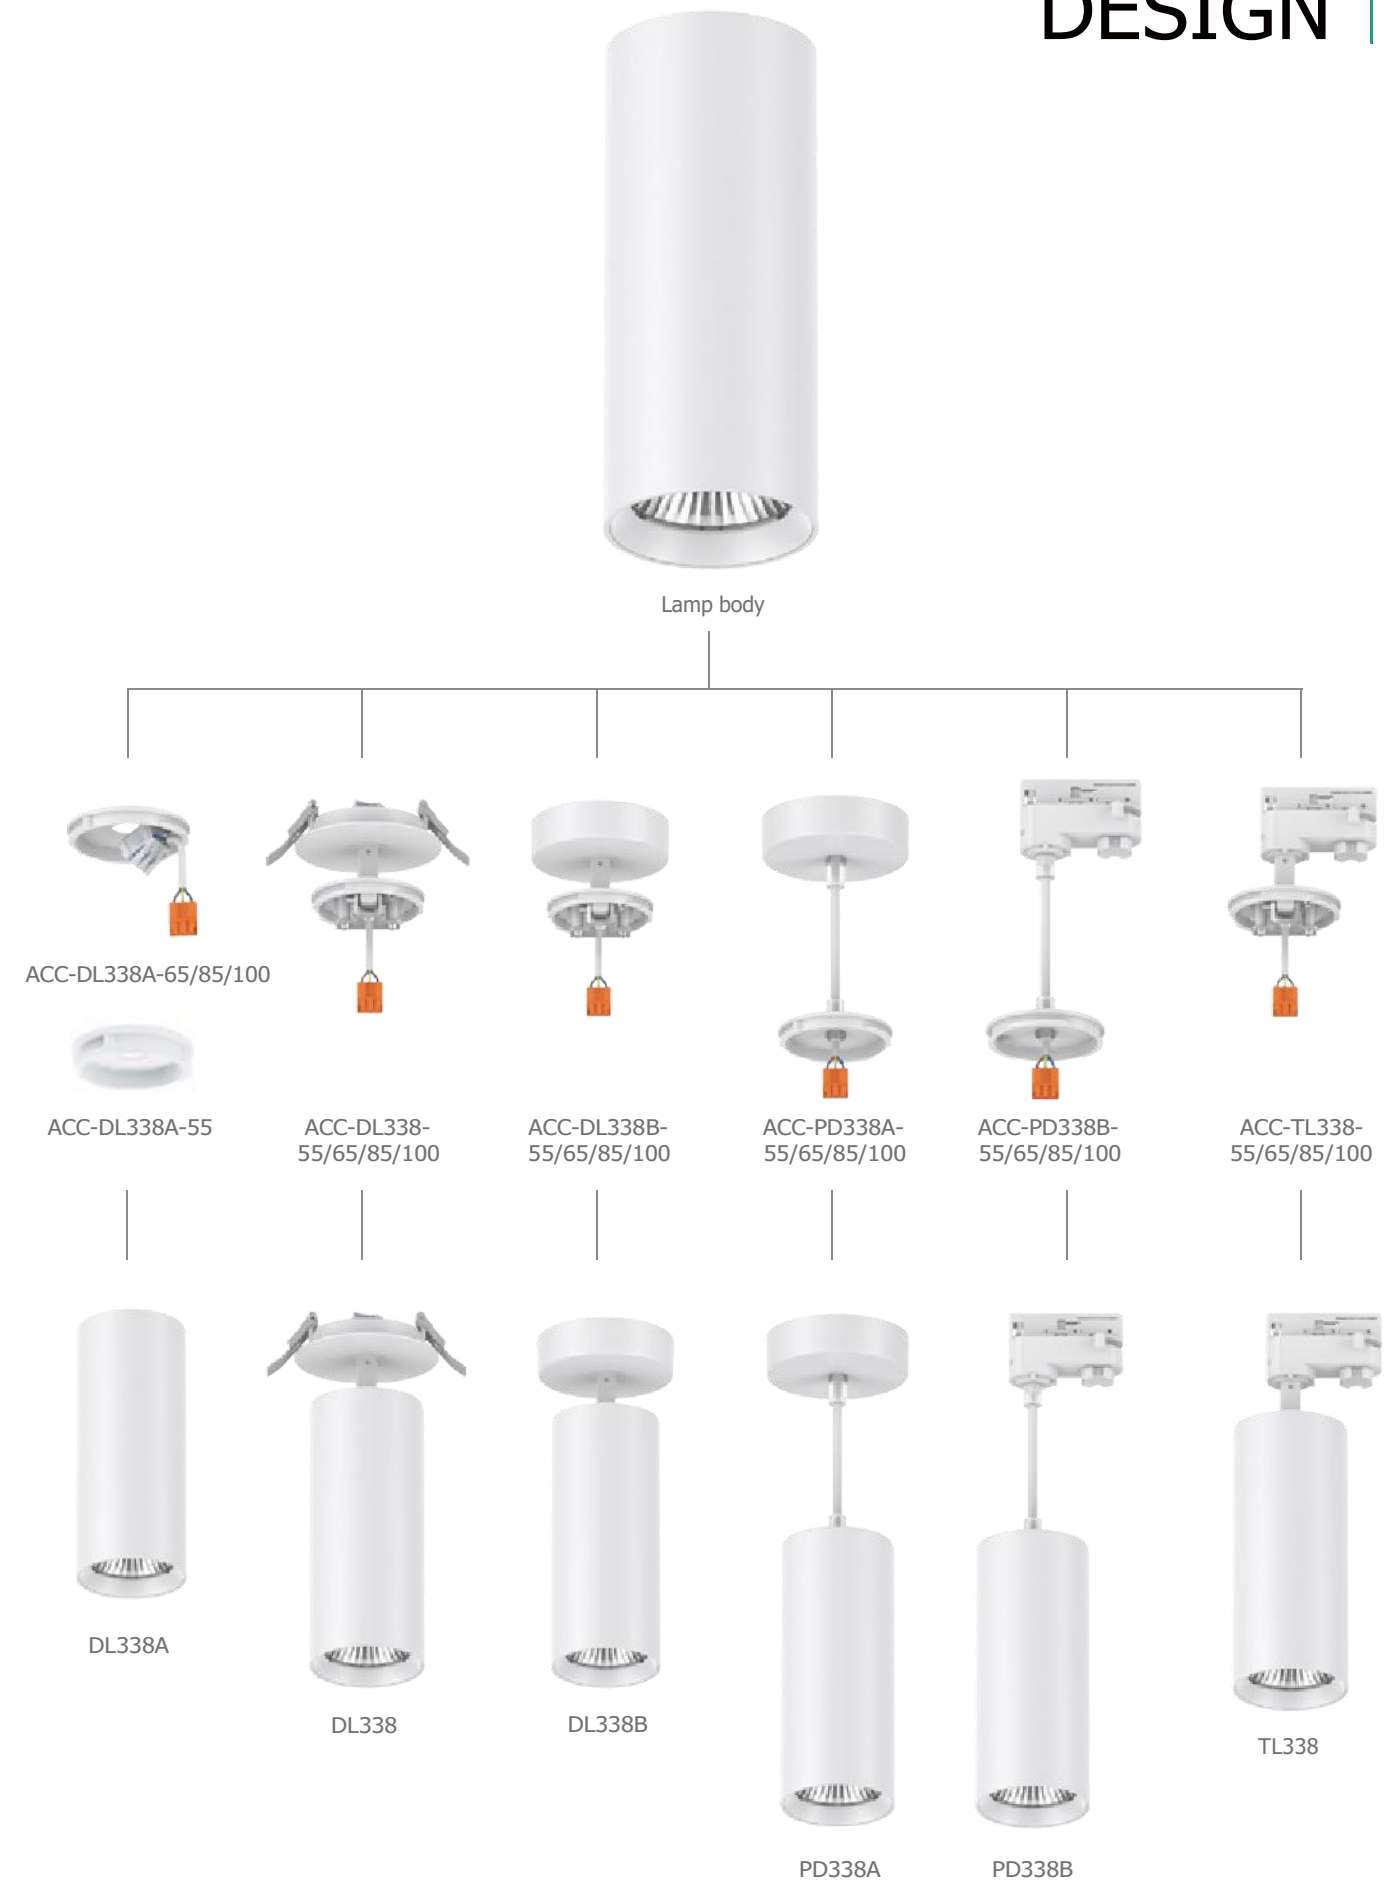




DL338A/B NEW Downlight



DL338A/B is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency, AL6063 Aluminum profile provides excellent thermal dissipation. Four size options : Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

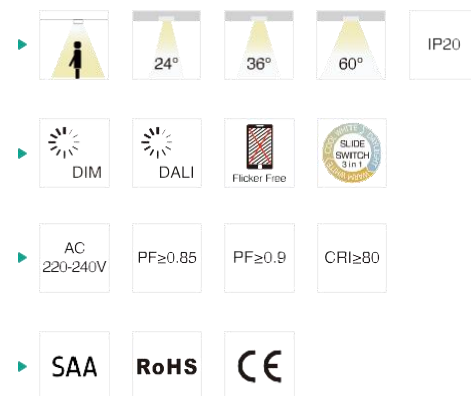


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL338A/B-55-6W(D)	6W	Ø55x160/Ø55x211	750lm	0.33/0.49	24PCS
DL338A/B-55-10W(D)	10W	Ø55x160/Ø55x211	1200lm	0.33/0.49	24PCS
DL338A/B-65-10W(D)	10W	Ø65x180/Ø65x231	1200lm	0.44/0.60	24PCS
DL338A/B-65-15W(D)	15W	Ø65x180/Ø65x231	1750lm	0.44/0.60	24PCS
DL338A/B-85-20W(D)	20W	Ø85x206/Ø85x270	2650lm	0.73/0.89	12PCS
DL338A/B-85-25W(D)	25W	Ø85x206/Ø85x270	3200lm	0.73/0.89	12PCS
DL338A/B-100-30W(D)	30W	Ø100x220/Ø100x284	3650lm	0.99/1.15	12PCS
DL338A/B-100-35W(D)	35W	Ø100x220/Ø100x284	4250lm	0.99/1.15	12PCS


CCT ——— 2700K 3000K 4000K 5000K

Finish ——— White Black

DL338 NEW Downlight



DL338 is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency, AL6063 Aluminum profile provides excellent thermal dissipation. Four size options : Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

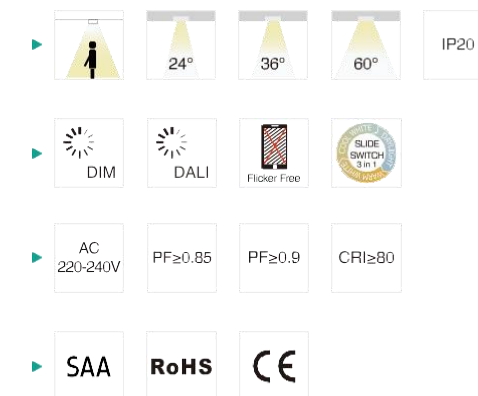


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL338-55-6W(D)	6W	Ø55x215	90-95	750lm	0.51	12PCS
DL338-55-10W(D)	10W	Ø55x215	90-95	1200lm	0.51	12PCS
DL338-65-10W(D)	10W	Ø65x235	90-95	1200lm	0.62	12PCS
DL338-65-15W(D)	15W	Ø65x235	90-95	1750lm	0.62	12PCS
DL338-85-20W(D)	20W	Ø85x274	90-95	2650lm	1.08	12PCS
DL338-85-25W(D)	25W	Ø85x274	90-95	3200lm	1.08	12PCS
DL338-100-30W(D)	30W	Ø100x288	90-95	3650lm	1.17	12PCS
DL338-100-35W(D)	35W	Ø100x288	90-95	4250lm	1.17	12PCS

CCT ——— 2700K 3000K 4000K 5000K


Finish ——— White Black



PD338A/B NEW Downlight




PD338A/B is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency, AL6063 Aluminum profile provides excellent thermal dissipation. Four size options : Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

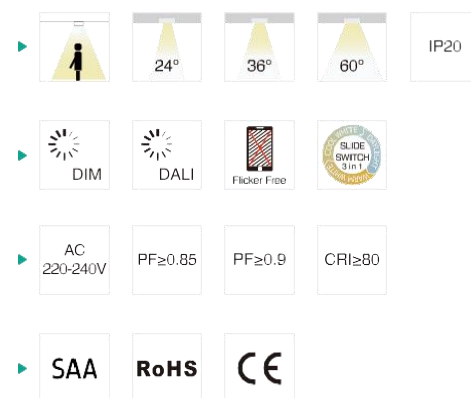


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PD338A/B-55-6W(D)	6W	Ø55x1189/Ø55x1213	750lm	0.50/0.48	12PCS
PD338A/B-55-10W(D)	10W	Ø55x1189/Ø55x1213	1200lm	0.50/0.48	12PCS
PD338A/B-65-10W(D)	10W	Ø65x1209/Ø65x1233	1200lm	0.61/0.59	12PCS
PD338A/B-65-15W(D)	15W	Ø65x1209/Ø65x1233	1750lm	0.61/0.59	12PCS
PD338A/B-85-20W(D)	20W	Ø85x1235/Ø85x1259	2650lm	0.98/0.87	12PCS
PD338A/B-85-25W(D)	25W	Ø85x1235/Ø85x1259	3200lm	0.98/0.87	12PCS
PD338A/B-100-30W(D)	30W	Ø100x1249/Ø100x1273	3650lm	1.16/1.14	12PCS
PD338A/B-100-35W(D)	35W	Ø100x1249/Ø100x1273	4250lm	1.16/1.14	12PCS

CCT — 2700K 3000K 4000K 5000K Finish — White Black

TL338 NEW Track light



TL338 is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency, AL6063 Aluminum profile provides excellent thermal dissipation. Four size options : Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

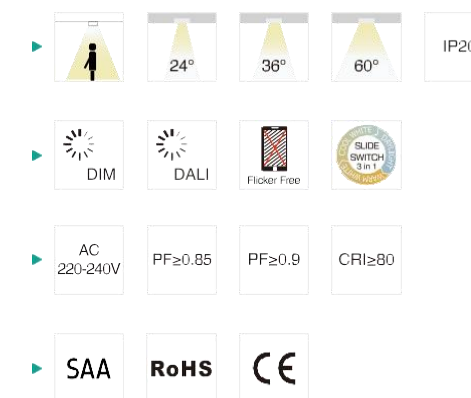

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL338-55-6W(D)	6W	Ø55x233	750lm	0.48	12PCS
TL338-55-10W(D)	10W	Ø55x233	1200lm	0.48	12PCS
TL338-65-10W(D)	10W	Ø65x253	1200lm	0.58	12PCS
TL338-65-15W(D)	15W	Ø65x253	1750lm	0.58	12PCS
TL338-85-20W(D)	20W	Ø85x292	2650lm	0.87	12PCS
TL338-85-25W(D)	25W	Ø85x292	3200lm	0.87	12PCS
TL338-100-30W(D)	30W	Ø100x306	3650lm	1.13	12PCS
TL338-100-35W(D)	35W	Ø100x306	4250lm	1.13	12PCS

CCT — 2700K 3000K 4000K 5000K Finish — White Black