MUUVIN V1

MUUVIN SOFTWARE

User Manual

Virtual analog synthesizer with wavetables, granular sampler and studio effects

Version 1.0 · VST3 plugin · Windows 64-bit

ENGLISH

Contents

01 Specifications 3
02 Getting started 4
03 Signal flow 5
04 Interface overview 6
05 Top bar 7
06 Macros: one knob, many targets 8
07 SUB, OSC A and OSC B oscillators 9
08 OSC A in detail: FM, unison and mix 10
09 OSC B: track, sync and ring 11
10 OSC C, NOISE and FILTER 12
11 NOISE and FILTER in detail 13
12 Wavetables: import, export and create 14
13 Wavetable editor 15
14 Wavetable editor: harmonics mode 16
15 Wavetable editor: precision and zoom 17
16 Sampler and granular (OSC C › SMP) 18
17 Sampler: loading a sample 19
18 Sample menu 20
19 Sample editor and slicing 21
20 Sample editor: points, granular and pitch 22
21 Granular: grain controls 23
22 Modulation: sources, envelopes, LFOs and voicing 24
23 SOURCES and VOICING 25
24 Envelopes ENV 1 to ENV 4 26
25 LFOs 1 to 8 27
26 VELO · WHEEL: expression 28
27 Performance bar and keyboard 29
28 Wheels, SEQ and ARP 30
29 CHORD, key, scale and keyboard 31
30 MIX page and ANALOG section 32
31 ANALOG: drift, tolerance and heat 33
32 FX page: effects chain 34
33 EFFECTS: load and order 35
34 Rack: DRIVE, FILTER and TAPE 36
35 Rack: CHORUS, FLANGER and ECHO 37
36 Rack: DELAY, REVERB and GATE 38
37 Rack: COMPRESSOR, LIMITER and SATURATION 39
38 MATRIX page: modulation matrix and macros 40
39 GLOBAL page 41
40 Themes, size and language 42
41 Preset browser and tags 43
42 Search by vibe 44
43 Browser: tag filters 45
44 Main menu 46
45 Guide: Synth1 banks and presets (.syl) 47
46 Sound recipes 48
47 Shortcuts and troubleshooting 49
48 Glossary 50

01

Specifications

MUUVIN V1 is a virtual analog synthesizer with a warm, 80s-style sound. It combines classic oscillators, wavetables, a granular sampler, two filters, drag-and-drop modulation and a complete studio effects chain. It reads banks and presets from the classic Synth1 synthesizer by Daichi and aims to keep the original sound fully faithful, now with an analog character.

Format	VST3, Windows 64-bit
Developer	MUUVIN SOFTWARE
Polyphony	Up to 16 voices · Poly, Mono, Legato · Unison
Classic oscillators	OSC A (Sine, Saw, Pulse, Triangle), OSC B (Saw, Pulse, Triangle, Noise) and SUB · FM, Sync and Ring
Wavetables	3 layers (A, B, C) · 8 factory tables · 32 frames × 2048 points · built-in editor
Sampler and granular	WAV and MP3 · looping sampler · granular · slicing (equal, transients, grid, manual)
Noise	Noise generator with colour and level
Filters	2 filters (serial or parallel): LP12, LP24, HP12, BP12 and LP24 Ladder
Envelopes	4 (amp, filter, modulation and free)
LFOs	8 · Saw, Triangle, Square, S&H, Random and Sine · tempo sync · key sync
Modulation	Drag and drop · 16-slot matrix with curve and bypass · 8 macros × 4 targets
Analog character	DRIFT, TOLERANCE and HEAT
Effects	12 reorderable + REVERSE
Performance	16-step sequencer · arpeggiator · 15 chords · 14 scales · snap to scale
Presets	Reads banks and presets from the classic Synth1 by Daichi (.sy1: file, folder or .zip), faithful to the original sound with an analog character · factory bank MUUVIN Analog Dreams (400, by category)
Interface	5 pages · 75% to 110% · 5 themes · Português and English · built-in manual

02

Getting started

1 Installation

Copy the **MUUVIN V1.vst3** folder to `C:\Program Files\Common Files\VST3` and reopen your DAW. MUUVIN V1 shows up as an instrument by **MUUVIN SOFTWARE**. Close the DAW before updating the plugin.

2 First sound

Create an instrument track with MUUVIN V1 and play. The **initial sound** preset is a clean starting point.

3 Loading presets

Click ☰ to open the browser. The **MUUVIN Analog Dreams** bank (400 presets in categories: AR, BR, BS, LD, NZ, PD, SQ and SY) comes preinstalled and is permanent.

4 Importing .sy1 banks

Use **MENU › Import bank** (folder or .zip), or the browser's 📁 icon to import several .zip files at once. Presets play with their original sound.

5 Editing a preset

Load the preset and change anything: click a module name to switch it on or off, turn the knobs and drag modulation sources.

6 Saving

Click the save icon in the top bar. Your DAW project also stores everything, including samples and slices.

03

Signal flow

Understanding the signal path helps you decide what to change. In MUUVIN V1 it always follows this order, from key to output:

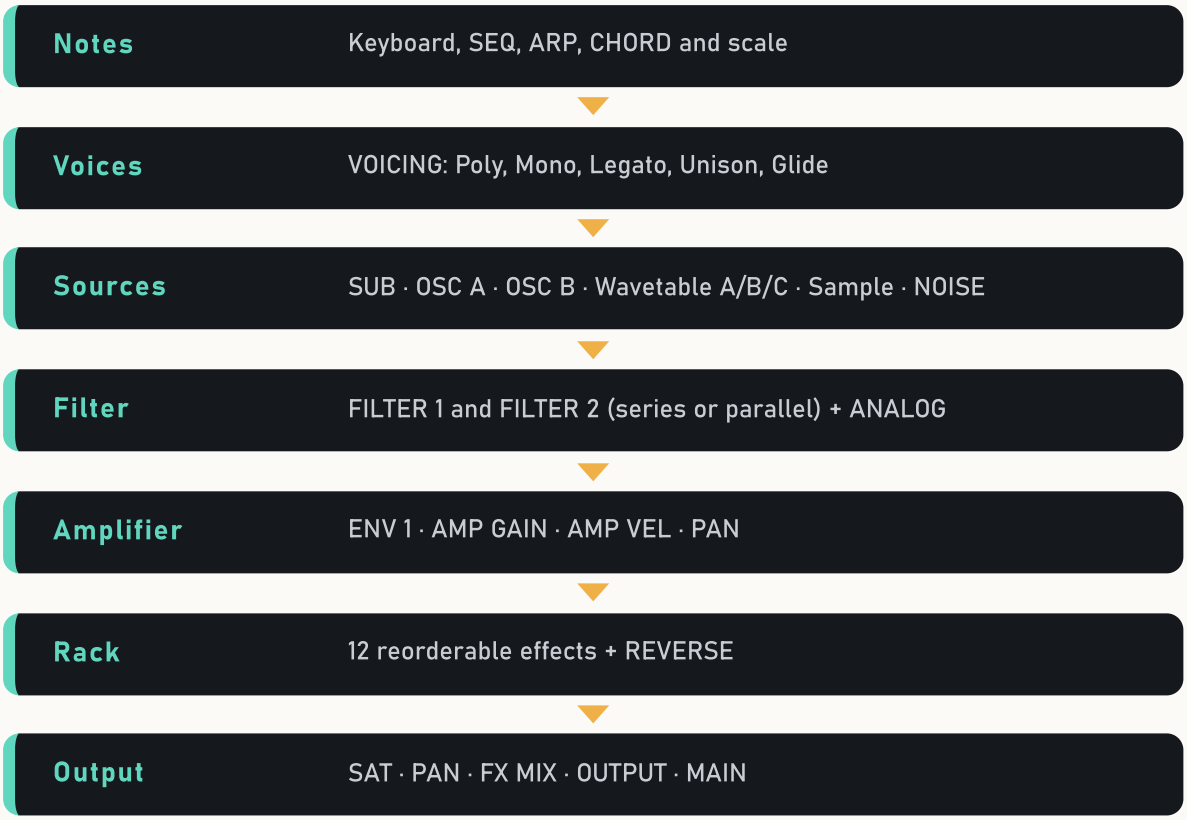

> Modulation: ENV 1–4, LFO 1–8, velocity, wheel and the 8 macros can change any stage above, through the MATRIX or by dragging the source onto a knob.

04

Interface overview

MUUVIN V1 has five pages (OSC, MIX, FX, MATRIX and GLOBAL). The top bar is always at the top and the performance bar with the keyboard is always at the bottom. The OSC page holds sound generation: oscillators, noise, filter and the modulation sources.

WHAT EACH NUMBER DOES

1. Pages: OSC, MIX, FX, MATRIX and GLOBAL.
2. Classic oscillators: SUB, OSC A and OSC B.
3. OSC C: three wavetable layers and the sampler/granular engine.
4. NOISE and FILTER (filter 1 and filter 2).
5. SOURCES: envelopes, LFOs, velocity and wheel, ready to drag.
6. ENV, LFO and VOICING (polyphony) editors.
7. Performance bar: SEQ, ARP, CHORD, key and scale.
8. On-screen keyboard: play with the mouse; shows the notes being played.

HOW TO USE

- To turn a knob, drag up or down. Hold Shift for fine control.
- Double-click a knob to reset it.
- Click the square or the name of a module (SUB, OSC A, OSC B, OSC C, NOISE, FILTER) to switch it on or off. Switching it back on restores the previous value.
- Right-click a knob to see its modulations.
- Hovering a knob shows its name, value and a hint in the preset display.

> **Tip:** Change the window size in GLOBAL › INTERFACE SIZE (75% to 110%); the 1:1 button in the top bar restores the original size.

05

Top bar

The top bar is always visible. It holds navigation, the preset name, the 8 macros and the main volume.



WHAT EACH NUMBER DOES

1. Plugin pages. The green line marks the open page.
2. Amber warning (!): something switched on that makes no sound, such as a layer at level 0 or an effect at 0% mix. Hover to see the list; click to jump to the problem.
3. Preset display: name (double-click to rename), bank and position. The second line shows help for the knob under the mouse.
4. ◀ ▶ step through the presets in the bank; ☆ adds to favourites.
5. 8 MACROS: BRIGHT, DRIVE, MOTION, SPACE, WIDTH, TAPE, ATTACK and RELEASE. Drag a macro name onto any knob to control it.
6. ☰ opens the preset browser.
7. MENU: presets and banks, size, theme, language, manuals and plugin information.
8. Undo, redo and save the preset.
9. 1:1 returns the interface to its original size (100%). It is dimmed when the size is already 100%.
10. MAIN: plugin output volume.
11. Output level meter (L/R).

HOW TO USE

- To save, shape the sound, click save (disk icon) and choose the bank.
- A coloured dot after the name means the preset was edited and not saved yet.

06

Macros: one knob, many targets

The 8 macros live in the top bar and on the MATRIX page. Each macro moves up to 4 parameters at once, each with its own amount. It is the fastest way to make a preset expressive.

WHAT EACH NUMBER DOES

1. Macro knob and name. Drag the name onto any knob in the plugin to add a target.
2. Assigned target: the name of the controlled parameter.
3. Target amount (−100% to +100%). Drag to adjust; negative values invert the movement.
4. Removes the target.
5. Empty rows: up to 4 targets per macro.
6. Panel header with a usage hint.

HOW TO USE

- Turn the macro in the top bar while playing: every target moves together.
- Automate the macro in your DAW: the 8 macros show up as automatable parameters.

> **Tip:** The names BRIGHT, DRIVE, MOTION, SPACE, WIDTH, TAPE, ATTACK and RELEASE are suggestions; a macro can drive any parameter.

07

SUB, OSC A and OSC B oscillators

The classic oscillators are the core of the tone, in the style of 80s analog synthesizers. Presets in .syl format use exactly these blocks.

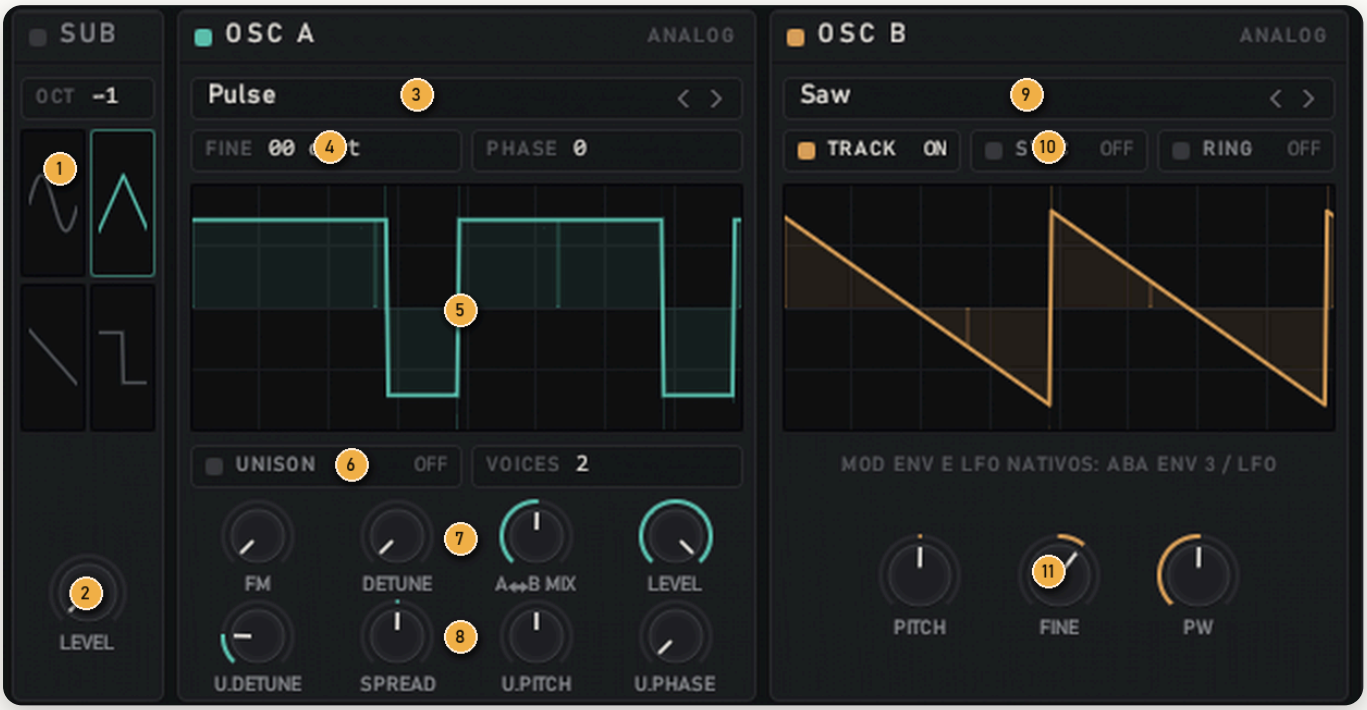

WHAT EACH NUMBER DOES

1. SUB: octave (OCT) and waveform of the sub oscillator (sine, triangle, saw or square).
2. SUB LEVEL: how much low end it adds.
3. OSC A waveform: Sine, Saw, Pulse or Triangle (‹ › arrows or click).
4. FINE (fine tuning in cents) and PHASE (start phase).
5. Live waveform display.
6. UNISON stacks voices; VOICES sets how many.
7. FM (OSC B modulates the frequency of OSC A), DETUNE, A↔B mix and LEVEL.
8. Unison controls: U.DETUNE, SPREAD (stereo width), U.PITCH and U.PHASE.
9. OSC B waveform: Saw, Pulse, Triangle or Noise.
10. TRACK (follows the keyboard), SYNC (hard sync to OSC A) and RING (ring modulation).
11. OSC B PITCH, FINE and PW (pulse width).

HOW TO USE

- For a fat 80s tone: OSC A on Saw, OSC B on Saw slightly detuned with FINE, and A↔B MIX in the middle.
- For an aggressive lead: enable SYNC and modulate OSC B PITCH with an envelope.

08

OSC A in detail: FM, unison and mix

OSC A is the main oscillator. Besides the waveform, it has FM from OSC B and its own unison, which stacks detuned copies to thicken the sound.

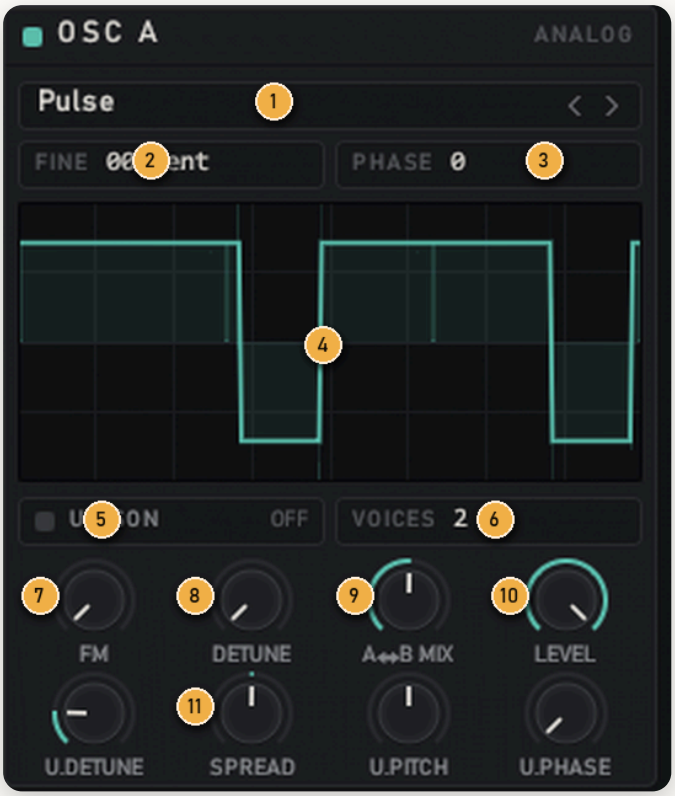

WHAT EACH NUMBER DOES

1. Waveform: Sine, Saw, Pulse or Triangle.
2. FINE: fine tuning in cents.
3. PHASE: where the wave starts on each note. 0 gives a firmer attack.
4. Waveform display, updated live.
5. UNISON: switches on the stacked copies of OSC A.
6. VOICES: how many copies unison uses.
7. FM: how much OSC B modulates the frequency of OSC A. Creates metallic and bell tones.
8. DETUNE: detuning between OSC A and OSC B.
9. A↔B MIX: balance between OSC A and OSC B.
10. LEVEL: volume of the A+B pair (CLASSIC).
11. Unison: U.DETUNE (spread of pitch), SPREAD (stereo), U.PITCH (copy tuning) and U.PHASE (phase).

HOW TO USE

- For a supersaw: Saw, UNISON on, VOICES 4 to 8, U.DETUNE around 30% and SPREAD high.
- For a bell: Sine, FM between 30% and 60% and OSC B one or two octaves up.

Tip: Unison with many voices costs CPU. For dense pads, prefer 4 voices and a gentle chorus.

09

OSC B: track, sync and ring

OSC B follows or contrasts OSC A. With SYNC and RING it creates the classic aggressive tones of 80s leads.

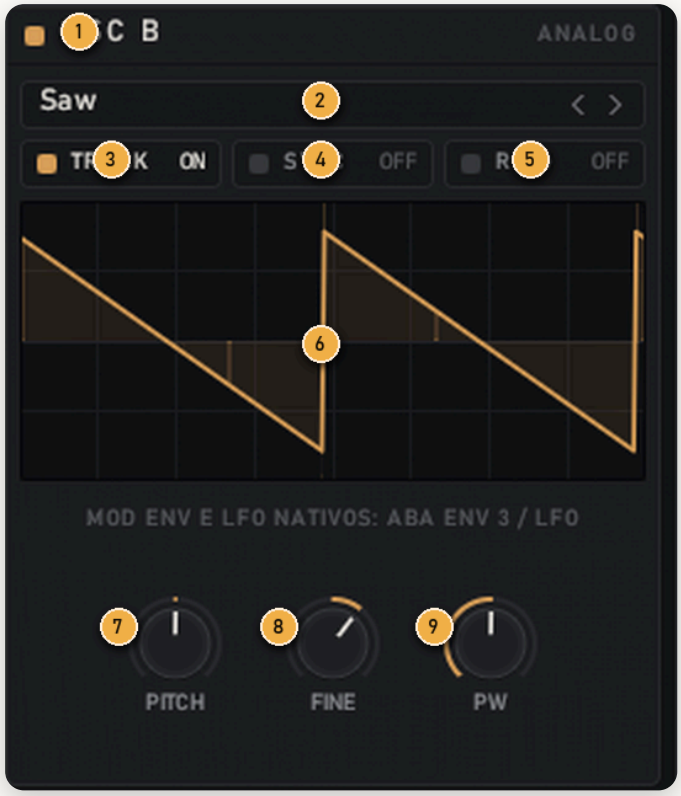

WHAT EACH NUMBER DOES

1. LED and name: switches OSC B on or off. Switching it back restores the previous level.
2. Waveform: Saw, Pulse, Triangle or Noise.
3. TRACK: OSC B follows the keyboard. Off, it stays at a fixed pitch (good for effects and FM).
4. SYNC: restarts OSC B on every cycle of OSC A. Sweep PITCH for the classic tearing sync sound.
5. RING: ring modulation (A × B). Produces inharmonic, metallic partials.
6. OSC B waveform display.
7. PITCH: tuning in semitones relative to OSC A.
8. FINE: fine tuning.
9. PW: pulse width (with the Pulse wave). Modulate it with an LFO for PWM.

HOW TO USE

- Sync lead: SYNC on, then drag ENV 3 onto OSC B PITCH.
- The text in the middle reminds you that ENV 3 and the preset's native LFOs are in the ENV 3 / LFO tab.

10

OSC C, NOISE and FILTER

OSC C adds up to three wavetables (A, B and C) and a sample to the sound. NOISE adds coloured noise. FILTER shapes the tone of every source.

WHAT EACH NUMBER DOES

1. Tabs A, B and C (wavetables) and SMP (sample). A dot marks an active layer.
2. Three-dot menu: load, edit, save and manage the layer.
3. Selected table: Basic, Harmonics, PWM, Vowels, Sync, Fold, Metal, Bitcrush or your own tables.
4. Switch each layer on or off. KEEP keeps the layer when you change presets.
5. 3D view of the wavetable frames, with the current frame highlighted.
6. The pencil opens the wavetable editor.
7. POSITION (scans the frames), OCTAVE, SEMI and FINE.
8. Levels: LVL A, LVL B, LVL C, CLASSIC (oscillators A/B) and SAMPLE.
9. Noise type, with spectrum view.
10. COLOR (noise tone) and LEVEL.
11. Tabs 1 and 2: filter 1 and filter 2 (serial or parallel).
12. Type: Low-pass 12, Low-pass 24, High-pass 12, Band-pass 12 or Low-pass 24 Ladder.
13. Live filter curve (frequency and resonance).
14. VELOCITY › CUTOFF: playing harder opens the filter.
15. CUTOFF, RESO (resonance), ENV (envelope amount) and KEY TRK (keyboard tracking).

HOW TO USE

- Enable layer A, choose a table and drag an LFO onto POSITION: the tone starts to move.
- Click the FILTER name to switch the filter off and hear the sound without it.
- The coloured ring around a knob shows how much it is being modulated.

11

NOISE and FILTER in detail

Noise adds air and attack. The filter decides the brightness: it is the most important control of the analog tone. MUUVIN V1 has two filters, which can work in series or in parallel.

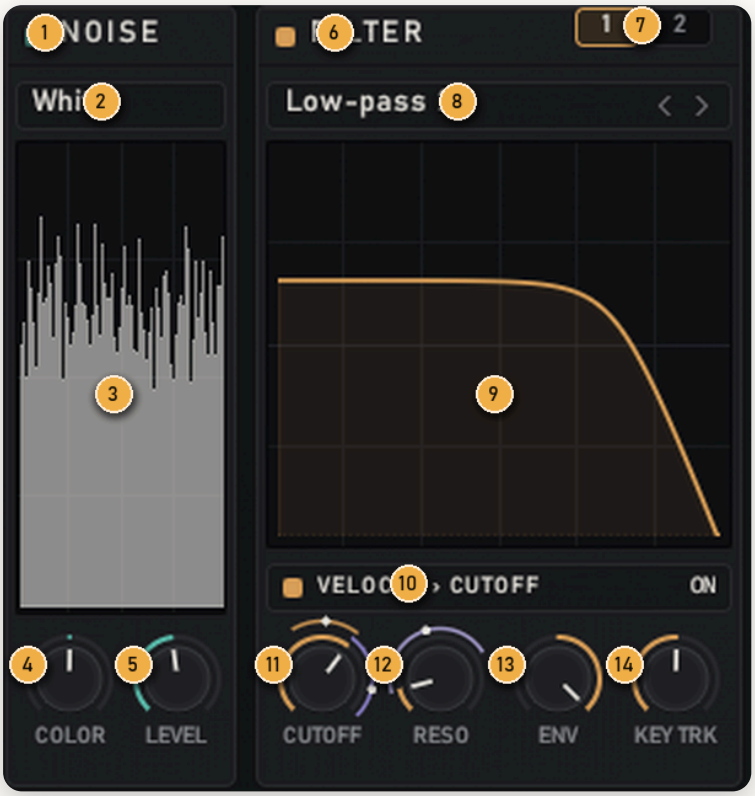

WHAT EACH NUMBER DOES

1. NOISE LED and name: switches the noise on or off.
2. Noise colour: Brown, Pink, White, Bright or Hiss, following the COLOR knob.
3. Live noise spectrum.
4. COLOR: tilts the noise toward lows or highs.
5. LEVEL: noise volume.
6. FILTER LED and name: on tab 1 it bypasses filter 1 (raw sound); on tab 2 it switches filter 2 on.
7. Tabs 1 and 2: choose which filter to edit.
8. Type: LP12, LP24, HP12, BP12 or LP24 Ladder.
9. Response curve, with frequency and Q.
10. VELOCITY › CUTOFF: playing harder opens the filter.
11. CUTOFF: cutoff frequency.
12. RESO: resonance; emphasises the cutoff region.
13. ENV: how much the filter envelope (ENV 2) moves the cutoff.
14. KEY TRK: the cutoff follows the notes, so high notes stay as bright as low ones.

HOW TO USE

- Classic bass: LP24, low CUTOFF, RESO around 30% and high ENV with a short DECAY on ENV 2.
- Attack noise: low NOISE LEVEL and a short envelope make plucks livelier.

Tip: The Ladder has the warmest, fullest character; use it for fat basses and leads.

12

Wavetables: import, export and create

The OSC C three-dot menu manages the tables of the open layer (A, B or C). Created or imported tables are stored in the preset and in the DAW project.

WHAT EACH NUMBER DOES

1. Import wavetables from WAV or MP3 files. The audio is cut into frames automatically.
2. Export the current table as WAV, to use in other synthesizers.
3. Export every table at once.
4. Draw a brand-new table from scratch in the editor.
5. Edit the current table in the wavetable editor.
6. Open the folder that holds your tables.

HOW TO USE

- Single-cycle files become a one-frame table; long files become up to 32 frames.
- After importing, turn POSITION to scan the frames and modulate it with a slow LFO.

> **Tip:** Click outside the menu to close it without doing anything.

13

Wavetable editor

Draw and edit your own wavetables with point-level precision. Open it with the pencil in OSC C or from the three-dot menu.

WHAT EACH NUMBER DOES

1. Layer being edited (A, B or C).
2. SAVE AS, SAVE and CLOSE.
3. Tools: PENCIL, LINE, CURVE, SMOOTH, NORMALIZE, MIRROR, INVERT and CLEAR.
4. Ready SHAPES: SIN, TRI, SAW, SQR, PULSE and NOISE.
5. Drawing area with 2048 points. The mouse wheel zooms and the crosshair shows point and value.
6. WAVE or HARMONICS (64 level and phase bars).
7. Precision: POINT, VALUE (±0.001; with Shift ±0.01), ZOOM, FIT, START AT ZERO and PHASE.
8. Wavetable frames (up to 32): click one to edit it.
9. NEW FRAME.
10. 3D PREVIEW of the table.
11. MORPH between frames: CROSSFADE, SPECTRAL or STEP.
12. CHARACTER: WARMTH, SMOOTH and HARMON. make the table less digital.
13. LIBRARY with factory tables and your own.
14. GRID 1/16: snaps drawing to a grid.

HOW TO USE

- Start from a ready SHAPE, refine with the PENCIL and use SMOOTH to remove harshness.
- In HARMONICS mode, drag the bars to add or remove harmonics. Alt + drag changes the phase.

14

Wavetable editor: harmonics mode

In HARMONICS mode you build the frame by adding partials, like an organ: each bar is a harmonic with its own level and phase. It is the cleanest way to create smooth, alias-free tones.

WHAT EACH NUMBER DOES

1. WAVE and HARMONICS tabs: switch between drawing the shape and editing partials.
2. Harmonic bars: drag up or down to change the level.
3. HARM: selected harmonic (1 to 64).
4. LEVEL: harmonic level in dB.
5. PHASE: harmonic phase.
6. Table frames. Click to edit another frame; + adds a frame.
7. PREVIEW: 3D view of the whole table.
8. MORPH BETWEEN FRAMES: CROSSFADE, SPECTRAL or STEP.
9. CHARACTER: HEAT, SMOOTH and HARMON. applied to the table.
10. LIBRARY: factory and user tables; click to open.
11. SAVE AS, SAVE and CLOSE.

HOW TO USE

- For an organ tone: only harmonics 1, 2, 3, 4, 6 and 8 at decreasing levels.
- Make a dark first frame and a bright last one; with SPECTRAL morph, POSITION becomes a smooth filter.

15

Wavetable editor: precision and zoom

In WAVE mode each frame has 2048 points. The fields in the bottom row let you edit point by point, with zoom, for adjustments the mouse alone can't reach.

WHAT EACH NUMBER DOES

1. Cursor showing the exact point and value under the mouse.
2. Frame waveform; the faint ghost is the original frame.
3. POINT: selected position (0 to 2047). Use ‹ › to step one point.
4. VALUE: point value, from −1 to +1. Type or drag.
5. ZOOM: zooms in; the mouse wheel zooms too.
6. FIT: shows the whole frame again.
7. START AT ZERO: forces the frame to start at zero, avoiding clicks.
8. PHASE: rotates the whole frame.

HOW TO USE

- Top-bar tools: PENCIL, LINE and CURVE draw; SMOOTH, NORMALIZE, MIRROR, INVERT and CLEAR transform the frame.
- SHAPES (SIN, TRI, SAW, SQR, PULSE, NOISE) drop in a ready-made basic shape.

> **Tip:** GRID 1/16 snaps drawing to regular divisions, great for stepped waves.

16

Sampler and granular (OSC C › SMP)

Load any WAV or MP3 file and play it as a sampler, or turn the audio into granular textures.

WHAT EACH NUMBER DOES

1. OSC C SMP tab.
2. File name. LOAD loads a WAV or MP3 (also from the three-dot menu).
3. SAMPLER mode (plays the file) or GRANULAR (grains).
4. Granular spectral view, with position (POS) and SPRAY.
5. LEVEL, GAIN, TUNE, FINE and PAN.
6. POSITION, SIZE (grain size), DENSITY, SPRAY and SCAN.

HOW TO USE

- A pad from any sound: GRANULAR mode, large SIZE, medium DENSITY and a slow LFO on POSITION.

17

Sampler: loading a sample

The OSC C SMP layer plays a WAV or MP3 sample, as a sampler (with loop) or as granular. With no sample loaded, the display invites you to drag or click.

WHAT EACH NUMBER DOES

1. Sample name; click the field (or LOAD…) to load one.
2. ON: switches the sample layer on.
3. SAMPLER or GRANULAR: playback mode.
4. Drop area: drag a WAV or MP3 from Explorer or click LOAD.
5. Click the display to open the sample editor.
6. Sample LEVEL, GAIN, TUNE, FINE and PAN.
7. FADE IN, FADE OUT, XFADE (loop crossfade), START MOD and WARMTH.

HOW TO USE

- The sample is stored in the preset and in the DAW project; you don't need to keep the original file.
- The sample runs through the filter, envelopes and effects, like any oscillator.

> **Tip:** WARMTH adds tape saturation to the sample, matching the rest of the analog sound.

Sample menu

With the SMP tab open, the three-dot menu gathers every sample action: load, edit, slice, export and remove.

WHAT EACH NUMBER DOES

1. Load sample (WAV / MP3).
2. Edit and slice precisely: opens the sample editor.
3. Slice into equal parts (2 to 64).
4. Slice by transients: cuts at every detected attack.
5. Slice on the tempo grid (1/4, 1/8, 1/16…).
6. Export slices (WAV): one file per slice. Available when slices exist.
7. Save edited sample: writes the edited result.
8. Remove the sample from the layer.

HOW TO USE

- With slices, each key plays one slice starting at C3: great for drum loops and vocal phrases.

19

Sample editor and slicing

The sample editor trims, cleans and slices audio with sample accuracy. Open it from the three-dot menu › Edit and slice.

WHAT EACH NUMBER DOES

1. WT A, WT B, WT C and SAMPLE tabs.
2. SAMPLER or GRANULAR.
3. LOAD WAV/MP3, SAVE and CLOSE.
4. Tools: NORMALIZE, REVERSE, TRIM, FADE IN/OUT, DC, CROP LOOP, DETECT ROOT, SNAP ZERO-CROSS and SNAP GRID.
5. Overview of the whole file, with the slices.
6. Slice mode: EQUAL, TRANSIENTS, GRID or MANUAL.
7. N, SENS, MIN or DIV, depending on the mode.
8. CLEAR removes all slices.
9. Waveform: double-click adds a slice, drag moves it, right-click deletes it and click selects it.
10. Zoom and data for the selected slice. Tab moves to the next one.
11. Granular and sampler controls.
12. POINTS or SLICES (list).
13. Slice list; double-click to listen.
14. Slice START, END, FADE and ZERO-CROSS.
15. USE IN GRANULAR, SLICE › WT (turns it into a wavetable), LISTEN and EXPORT SLICES (WAV).

HOW TO USE

- Drum loop: choose TRANSIENTS, adjust SENS until each hit has its own slice, then click EXPORT SLICES.

20

Sample editor: points, granular and pitch

The panel on the right of the sample editor controls where the sound starts and ends, how granular triggers and how the sample is tuned. Everything is saved with the preset.

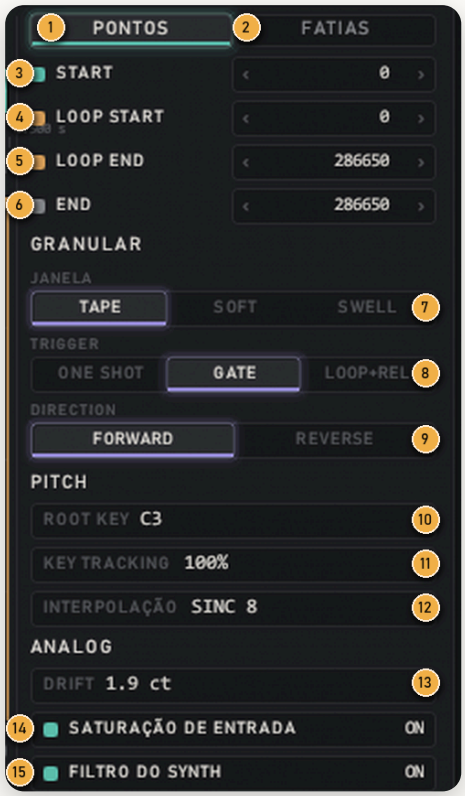

WHAT EACH NUMBER DOES

1. POINTS: sample start, loop and end.
2. SLICES: slice list and settings.
3. START: where playback starts.
4. LOOP START: start of the looped section.
5. LOOP END: end of the looped section.
6. END: where playback ends.
7. Grain WINDOW: TAPE, SOFT or SWELL.
8. TRIGGER: ONE SHOT, GATE (while the key is held) or LOOP+REL.
9. DIRECTION: FORWARD or REVERSE.
10. ROOT KEY: the note at which the sample plays at its original pitch.
11. KEY TRACKING: how much the pitch follows the keyboard (0% = fixed).
12. INTERPOLATION: LINEAR, HERMITE or SINC 8 (cleanest).
13. DRIFT: slow pitch wander, like tape.
14. INPUT SATURATION: warms the sample before the filter.
15. SYNTH FILTER: routes the sample through the preset filter.

HOW TO USE

- You can also drag the markers on the waveform; ‹ › move 1 sample (Shift: 10).
- DETECT ROOT, in the toolbar, finds the sample's note for you.

21

Granular: grain controls

In GRANULAR mode the sample is played as small overlapping grains. This lets you freeze, stretch and turn any audio into textures and pads.

WHAT EACH NUMBER DOES

1. – / +: waveform zoom.
2. FIT: shows the whole sample.
3. LOOP: frames the loop region.
4. SEL: frames the selected slice.
5. Current zoom and visible range in seconds.
6. POSITION: where in the sample grains are read.
7. SIZE: length of each grain (ms).
8. DENSITY: grains per second.
9. SPRAY: scatters grain positions around POSITION.
10. JITTER: random pitch variation per grain (cents).
11. SPREAD: stereo spread of the grains.
12. SCAN: moves POSITION along the sample by itself.
13. GAIN: grain gain.
14. WARMTH: warm saturation.
15. LEVEL: final layer volume.

HOW TO USE

- Frozen pad: large SIZE (150 ms or more), high DENSITY, low SPRAY and SCAN at 0.
- Moving texture: slow SCAN, medium SPRAY and a slow LFO on POSITION.

22

Modulation: sources, envelopes, LFOs and voicing

In MUUVIN V1 all modulation is visual: just drag a source onto a knob. There are 4 envelopes, 8 LFOs, velocity and the mod wheel.

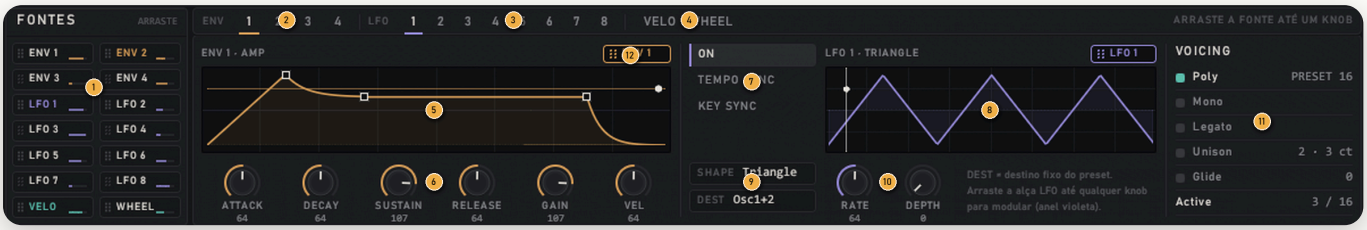

WHAT EACH NUMBER DOES

1. SOURCES: grab the dotted handle and drop it on any knob to create a link.
2. ENV 1 to 4 tabs. ENV 1 controls amplitude, ENV 2 the filter, ENV 3 modulation and ENV 4 is free.
3. LFO 1 to 8 tabs. LFO 1 and 2 use the preset's fixed destination; LFO 3 to 8 are free.
4. VELO · WHEEL: velocity and mod wheel as sources.
5. Envelope graph: drag the points to edit.
6. ATTACK, DECAY, SUSTAIN, RELEASE, GAIN and VEL (velocity sensitivity).
7. LFO: ON, TEMPO SYNC (follows the DAW tempo) and KEY SYNC (restarts on each note).
8. Live LFO shape.
9. SHAPE (Saw, Triangle, Square, S&H, Random or Sine) and DEST.
10. RATE (speed) and DEPTH.
11. VOICING: Poly, Mono, Legato, Unison, Glide and active voices.
12. Editor handle: you can also drag from here to modulate.

HOW TO USE

- Drag LFO 3 onto CUTOFF: a violet ring appears on the knob.
- Right-click CUTOFF to set the amount and the curve (LIN, EXP or LOG), bypass the link without deleting it, or remove it with ×.
- Every link also appears on the MATRIX page.

23

SOURCES and VOICING

On the left are all modulation sources, ready to drag. On the right, VOICING sets how notes are played: polyphonic, monophonic, legato, unison and glide.

WHAT EACH NUMBER DOES

1. SOURCES: each source's dotted handle can be dragged onto a knob.
2. ENV 1 to ENV 4: envelopes.
3. LFO 1 to LFO 8: low-frequency oscillators.
4. VELO: how hard the key is played.
5. WHEEL: modulation wheel (CC 1).
6. Mini meter: shows the source moving.
7. Poly: several notes at once.
8. Mono and Legato: one note only; in Legato the envelopes don't restart between tied notes.
9. Unison: stacked voices per note (count · detune).
10. Glide: slide time between notes.
11. Active: voices playing now / maximum.
12. PRESET 16: preset voice limit.

HOW TO USE

- Drag a source onto a knob: a coloured ring shows the amount. Drag the ring to adjust.
- Each new link takes a MATRIX row, where it can also be edited.

2 4

Envelopes ENV 1 to ENV 4

Envelopes shape the sound over time, from key press to after release. ENV 1 controls volume, ENV 2 the filter, ENV 3 oscillator modulation, and ENV 4 is free for any target.

WHAT EACH NUMBER DOES

1. Tabs 1 to 4: choose the envelope.
2. Envelope name and role (e.g. ENV 2 · FILTER).
3. Handle to drag the envelope onto any knob.
4. Editable curve: drag the points to change times and level.
5. ATTACK: rise time.
6. DECAY: time to fall to sustain.
7. SUSTAIN: level while the key is held.
8. RELEASE: fall time after the key is released.
9. AMOUNT (ENV 2): how much the envelope moves the filter. GAIN (ENV 1): volume.
10. VEL: key velocity changes the envelope intensity.

HOW TO USE

- Pluck: ATTACK 0, short DECAY, SUSTAIN 0.
- Pad: long ATTACK and RELEASE, high SUSTAIN.

> **Tip:** The ATTACK and RELEASE macros in the top bar adjust the envelopes of any preset in one move.

25

LFOs 1 to 8

LFOs create movement: vibrato, wah, tremolo, PWM and wavetable sweeps. LFO 1 and LFO 2 come from the preset and have their own target; LFO 3 to 8 are free, with no fixed target.

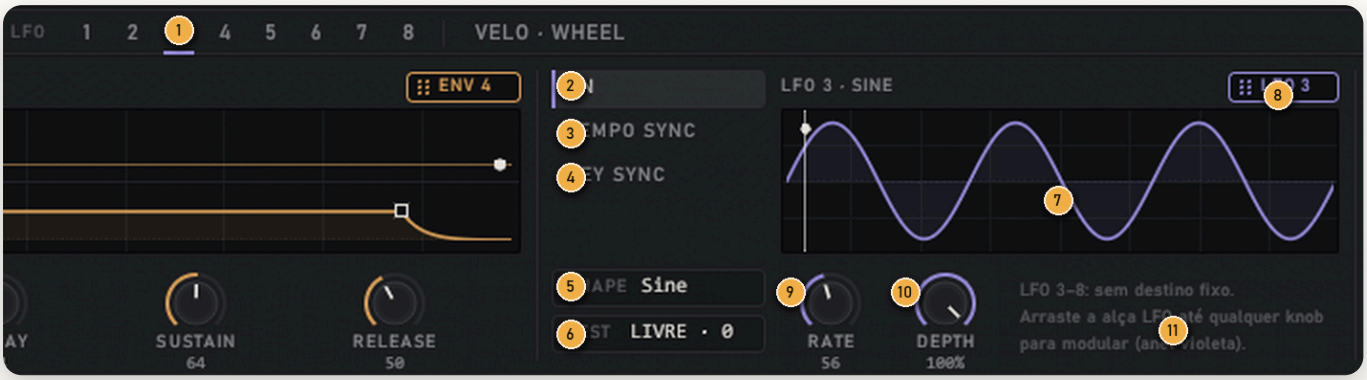

WHAT EACH NUMBER DOES

1. LFO 1 to 8 tabs.
2. ON: switches the LFO on.
3. TEMPO SYNC: locks the speed to the DAW tempo.
4. KEY SYNC: restarts the LFO on every note.
5. SHAPE: Saw, Triangle, Square, S&H, Random or Sine.
6. DEST: fixed target (LFO 1 and 2) or FREE (LFO 3 to 8).
7. Shape display, with the current position.
8. Handle to drag the LFO onto any knob.
9. RATE: speed.
10. DEPTH: intensity.
11. Usage reminder for the open LFO.

HOW TO USE

- Vibrato: Sine LFO, RATE around 5 Hz, low DEPTH on pitch.
- Wobble: TEMPO SYNC at 1/8 and a Triangle LFO on CUTOFF.

Tip: S&H with KEY SYNC off gives the classic "80s computer" filter effect.

26

VELO · WHEEL: expression

The VELO · WHEEL tab shows the two keyboard expression sources: touch strength (velocity) and the modulation wheel. Each can drive several targets.

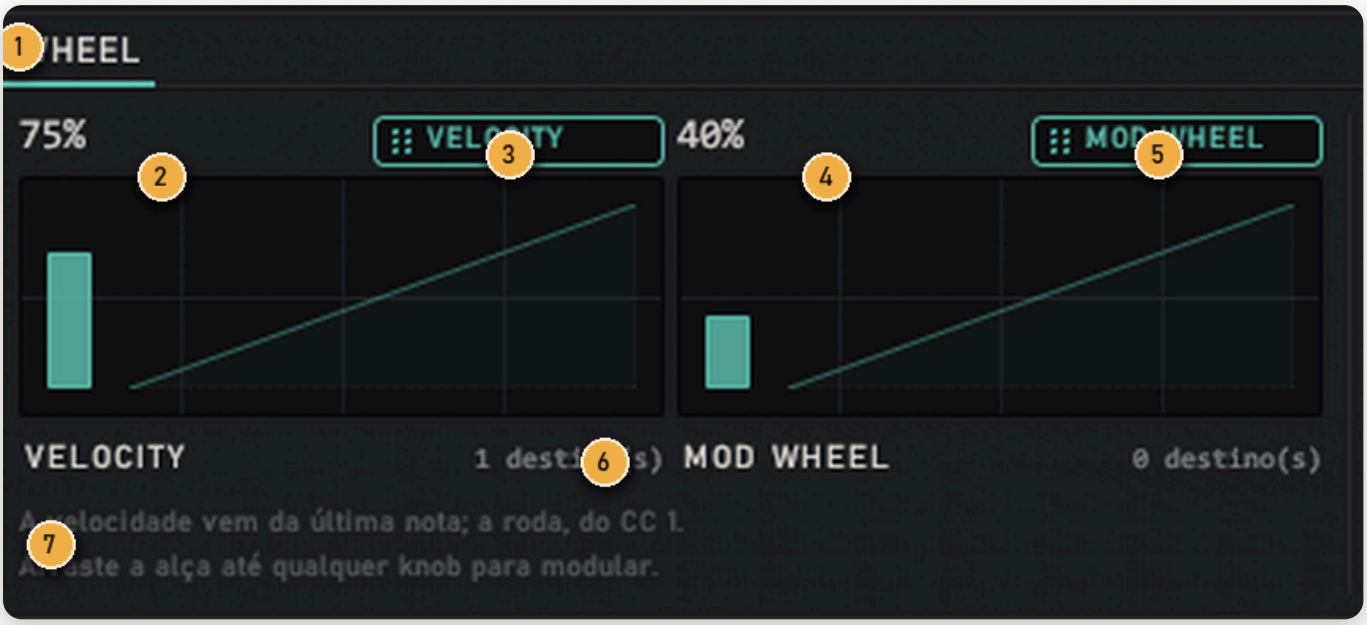

WHAT EACH NUMBER DOES

1. VELO · WHEEL tab.
2. Velocity of the last note played, in %.
3. VELOCITY handle: drag onto a knob.
4. Current mod wheel position.
5. MOD WHEEL handle: drag onto a knob.
6. How many targets each source already drives.
7. Reminder: the wheel comes from CC 1 on your controller.

HOW TO USE

- Send MOD WHEEL to CUTOFF and to an LFO DEPTH: one gesture opens the sound and adds vibrato.

27

Performance bar and keyboard

The bottom bar appears on every page and gathers the playing tools: wheels, sequencer, arpeggiator, chords, key and scale.

WHAT EACH NUMBER DOES

1. BEND and MOD: pitch wheel and modulation wheel.
2. RANGE (bend range), PORTA (portamento) and MODE.
3. SEQ: 16-step sequencer. Click the bars to edit and set the division and GT (gate).
4. ARP: arpeggiator with mode (UP·DN and others), octaves and swing.
5. CHORD: 15 chord types, SPR (spread) and STR (strum).
6. TRANSPOSE, KEY, SCALE (14 scales) and SWING.
7. SNAP TO SCALE: forces the notes you play into the chosen scale.
8. Keyboard: scale notes are marked; play with the mouse.

HOW TO USE

- One-finger chords: enable CHORD, choose MINOR and play a single note.
- SEQ and ARP follow the DAW tempo.

28

Wheels, SEQ and ARP

The left part of the performance bar holds the wheels, portamento, the 16-step sequencer and the arpeggiator. Both follow the DAW tempo.

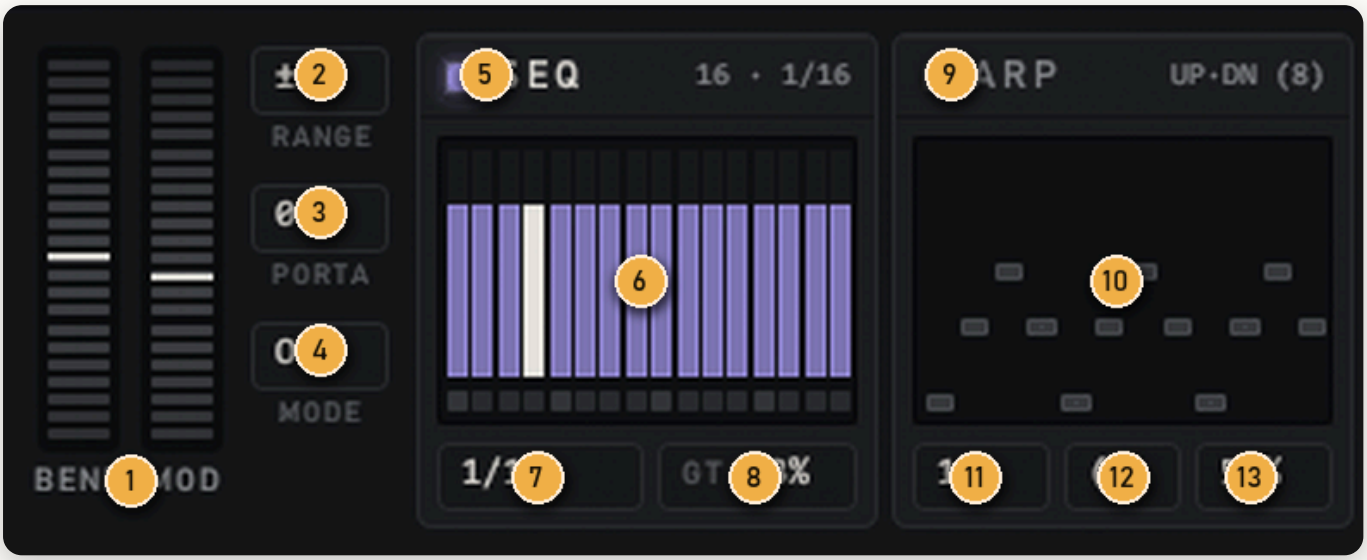

WHAT EACH NUMBER DOES

1. BEND and MOD: pitch-bend and modulation wheels; drag with the mouse.
2. RANGE: pitch-bend range (± semitones).
3. PORTA: portamento time.
4. MODE: portamento OFF or AUTO (only between tied notes).
5. SEQ: switches the sequencer on; shows steps and division.
6. Steps: click and drag to draw each step's height.
7. Step division (1/16, 1/8…).
8. GT: length of each step (gate).
9. ARP: switches the arpeggiator on; click the type to change it: UP·DN, UP, DOWN or RANDOM.
10. Drawing of the pattern that will play.
11. Arpeggio octaves (1× to 4×).
12. Arpeggio rhythmic division.
13. Arpeggio gate (note length).

HOW TO USE

- Hold a chord with ARP on: notes play one by one, in time with the song.

29

CHORD, key, scale and keyboard

CHORD turns one key into a full chord. TRANSPOSE, KEY and SCALE lock everything to the song's key, so you play without wrong notes.

WHAT EACH NUMBER DOES

1. CHORD: switches chord mode on; shows the key.
2. Chord name (15 types: MAJOR, MINOR, 7ths, SUS, POWER, ADD 9, DIM and scale chords). Click to change.
3. Chord notes and mini keyboard.
4. SPR: spreads the chord notes across octaves.
5. STR: strum; notes enter one after another.
6. TRANSPOSE: transposes everything in semitones.
7. KEY: the song's root note.
8. SCALE: 14 scales (major, minor, modes, pentatonics, blues, Japanese, Hungarian…). Click opens the scale box; drag or scroll changes it directly.
9. SWING: delays the off-beats of SEQ and ARP.
10. SNAP TO SCALE: off-scale notes move to the nearest scale note.
11. Keyboard: scale keys are marked; played notes light up.
12. Scale tag (e.g. C MAJ ▾): click to open the root and scale box, shown over the keyboard.
13. ROOT: pick the base note (C to B).
14. SCALE: all 14 scales, each showing its note pattern. ESC or a click outside closes the box.
15. Caption: the chosen scale and its notes.

HOW TO USE

- Picking the root or scale turns SNAP TO SCALE on. With CHORD on a fixed chord, it switches to the scale chord (SCALE TRIAD, 7TH or 9TH) so chords follow the key.
- The corner of the box shows what follows the scale: notes, chords or both.

Tip: The chosen scale stays active when you change presets.

MIX page and ANALOG section

The MIX page shows every layer and the output: level, waveform and spectrum. The ANALOG section gives the sound the warm, living character of an analog synthesizer.

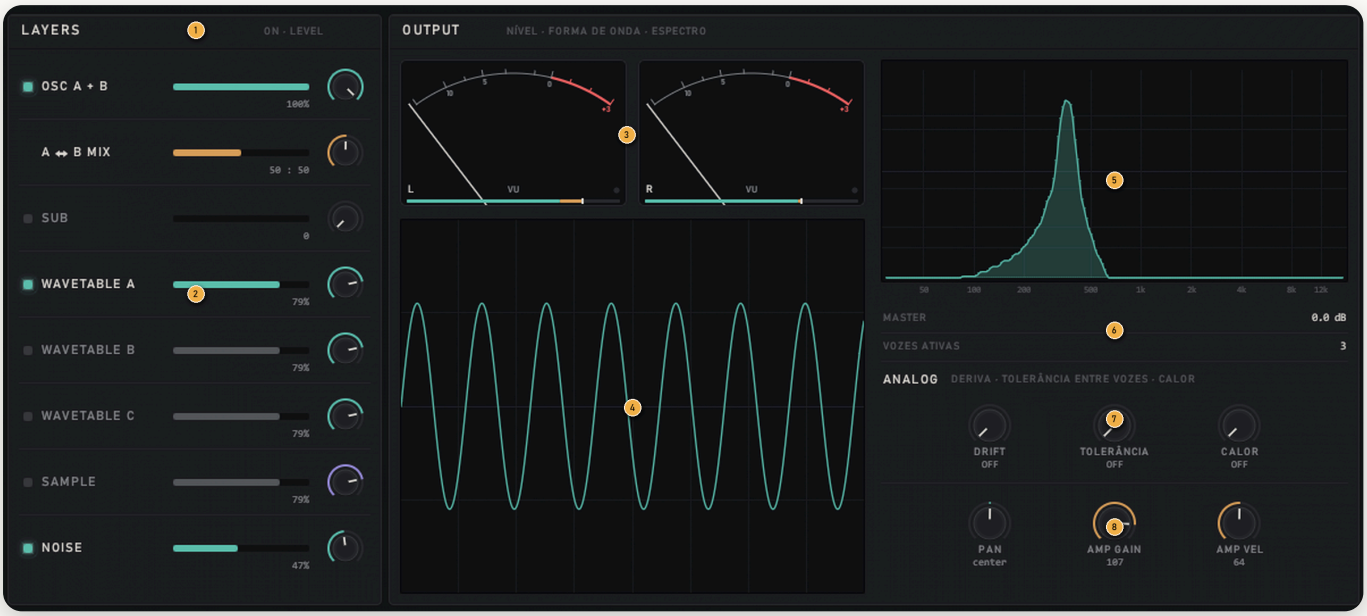

WHAT EACH NUMBER DOES

1. LAYERS: the LED switches each source on and off; the bar and knob set its level.
2. OSC A+B, A↔B MIX, SUB, WAVETABLE A/B/C, SAMPLE and NOISE.
3. L and R VU meters.
4. SCOPE: output waveform.
5. SPECTRUM: frequency analyser from 30 Hz to 16 kHz.
6. MASTER and ACTIVE VOICES.
7. ANALOG: DRIFT makes each oscillator drift slowly; TOLERANCE makes each voice slightly different in tuning and filter; HEAT saturates the sound before the filter without changing the level. At OFF, the preset sounds exactly like the original.
8. PAN, AMP GAIN and AMP VEL.

HOW TO USE

- For a vintage sound: DRIFT 30 to 40%, TOLERANCE 20 to 30% and HEAT to taste.
- An amber dot in the ANALOG title shows that one of these controls is active.

31

ANALOG: drift, tolerance and heat

The ANALOG section on the MIX page adds the imperfect behaviour of real hardware synths. At OFF, the sound is identical to the original preset.

WHAT EACH NUMBER DOES

1. ANALOG header: drift, tolerance between voices and heat.
2. DRIFT: each voice's pitch wanders slowly, like warming oscillators.
3. TOLERANCE: each voice gets a small fixed difference in tuning and filter cutoff, like real components.
4. HEAT: gentle asymmetric saturation; thickens the sound without changing the volume.
5. PAN: synth stereo position.
6. AMP GAIN: amplifier gain.
7. AMP VEL: how much velocity changes the volume.

HOW TO USE

- Values between 10% and 30% already bring pads and chords to life; above that, the effect becomes obvious.

Tip: To compare with the original, double-click the three knobs back to OFF.

FX page: effects chain

Twelve studio effects plus REVERSE. You load into the rack only the ones you want, in any order. The own effects of each .syl preset still play as they were made.

WHAT EACH NUMBER DOES

1. EFFECTS · A–Z: click an effect to load it into the rack; the number shows its position in the chain.
2. Chain SAT, PAN, FX MIX and OUTPUT.
3. ORDER: ready-made chain orders.
4. SYNC (DAW tempo) and global BYPASS.
5. Module header: ◀ ▶ change the order, ✕ removes it from the rack, plus the model (for example, DRIVE in TUBE, DIODE, FOLD or FUZZ).
6. Module PRESET: ready-made settings (‹ › to change).
7. Live effect display.
8. Effect knobs; MIX sets the dry/wet balance.
9. Scrollbar: scroll to see every loaded effect and the EMPTY slot.

HOW TO USE

- The effects are DRIVE, FILTER, TAPE, CHORUS, FLANGER, ECHO, DELAY, REVERB, GATE, COMPRESSOR (multiband), LIMITER and SATURATION, plus REVERSE.
- For tape warmth, enable TAPE (80S DECK) with low WOW and SAT.

3 3

EFFECTS: load and order

The EFFECTS column lists every effect in alphabetical order. The rack starts empty: one click on an effect loads it, already on, into the next EMPTY slot. Only loaded effects appear in the rack.

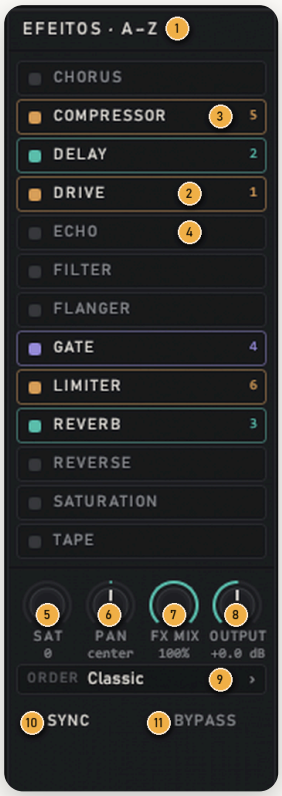

WHAT EACH NUMBER DOES

1. EFFECTS · A–Z: every effect in alphabetical order.
2. Loaded effect: coloured LED. Click to go to its card in the rack.
3. Number: the effect's position in the rack chain (1 = first to receive the sound).
4. Effect not loaded (grey): click to load it into the next EMPTY slot.
5. SAT: output saturation.
6. PAN: output stereo position.
7. FX MIX: overall dry/wet of the rack.
8. OUTPUT: final gain.
9. ORDER: ready-made orders (Classic and others).
10. SYNC: time effects follow the DAW.
11. BYPASS: switches the whole rack off to compare.

HOW TO USE

- In each card header, ◀ ▶ swap the effect with its neighbour and change the sound order.
- ✕ removes the effect from the rack and switches it off; the slot becomes EMPTY again.
- REVERSE always stays at the end of the chain.

> **Tip:** DRIVE before FILTER sounds aggressive; FILTER before DRIVE sounds rounder.

3 4

Rack: DRIVE, FILTER and TAPE

The first three rack modules add colour and weight. In every module: the LED and name switch it on/off; the menu on the right picks the model; PRESET ‹ › steps through ready-made settings; the display shows the effect live.

WHAT EACH NUMBER DOES

1. DRIVE: on/off.
2. Model: TUBE, DIODE, FOLD or FUZZ.
3. Module PRESET (e.g. Warm Tube).
4. Saturation transfer curve.
5. DRIVE, TONE, BIAS, ASYM, LEVEL and MIX.
6. FILTER: on/off.
7. Model: LOW PASS, HIGH PASS or BAND PASS.
8. Filter curve.
9. CUTOFF, RESO, RATE and DEPTH (auto movement), ENV (follows the level) and MIX.
10. TAPE: on/off.
11. Model: 80s DECK, CASSETTE or VHS.
12. Wow and saturation display.
13. WOW, FLUTTER, SAT, AGE (wear), HISS and MIX.

> **Tip:** TAPE with low WOW and AGE around 25% is the quickest route to an 80s tape sound.

35

Rack: CHORUS, FLANGER and ECHO

Modulation and short-echo effects that add width and motion. In every module: the LED and name switch it on/off; the menu on the right picks the model; PRESET ‹ › steps through ready-made settings; the display shows the effect live.

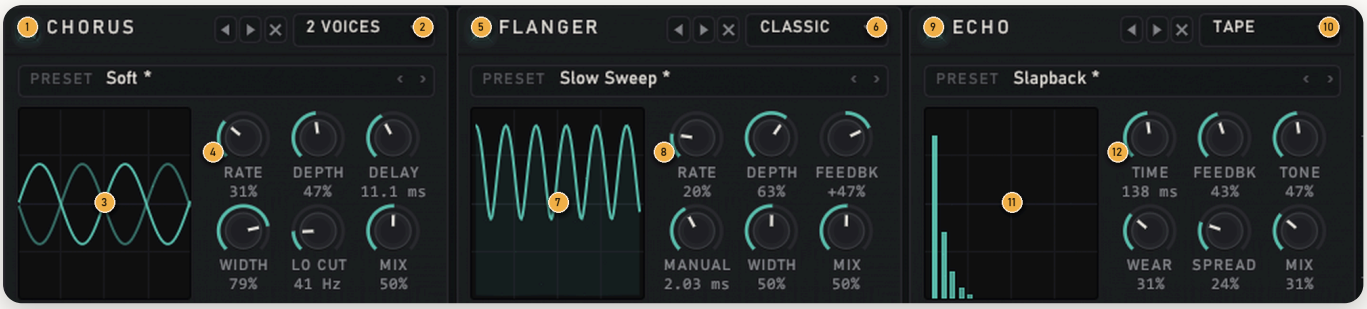

WHAT EACH NUMBER DOES

1. CHORUS: on/off.
2. Voices: 2, 3 or 4.
3. Chorus voices display.
4. RATE, DEPTH, DELAY, WIDTH, LO CUT and MIX.
5. FLANGER: on/off.
6. Model: CLASSIC or THROUGH-ZERO.
7. Sweep display.
8. RATE, DEPTH, FEEDBK, MANUAL, WIDTH and MIX.
9. ECHO: on/off.
10. Model: TAPE, SPACE or DUB.
11. Repeats display.
12. TIME, FEEDBK, TONE, WEAR, SPREAD and MIX.

> **Tip:** LO CUT on the chorus keeps the low end centred and solid, even with high WIDTH.

36

Rack: DELAY, REVERB and GATE

Space and rhythm. DELAY and GATE follow the DAW tempo when SYNC is on. In every module: the LED and name switch it on/off; the menu on the right picks the model; PRESET ‹ › steps through ready-made settings; the display shows the effect live.

WHAT EACH NUMBER DOES

1. DELAY: on/off.
2. Mode: STEREO, PING-PONG or MONO.
3. Repeats display.
4. SYNC (division), FEEDBK, WIDTH, LO CUT, HI CUT and MIX.
5. REVERB: on/off.
6. Type: HALL, ROOM or PLATE.
7. Tail display.
8. SIZE, DECAY, PREDLY, DAMP, WIDTH and MIX.
9. GATE: on/off.
10. Gate rhythmic division.
11. Step pattern: click to switch each step on or off.
12. DEPTH, ATTACK, RELEASE, SWING, STEPS and MIX.

> **Tip:** GATE at 1/16 on a pad creates the trance-gate effect without automation.

37

Rack: COMPRESSOR, LIMITER and SATURATION

Dynamics and finishing. The compressor is multiband (LOW, MID, HIGH), the limiter protects the output from peaks and SATURATION warms the sound like analog gear. In every module: the LED and name switch it on/off; the menu on the right picks the model; PRESET ‹ › steps through ready-made settings; the display shows the effect live.

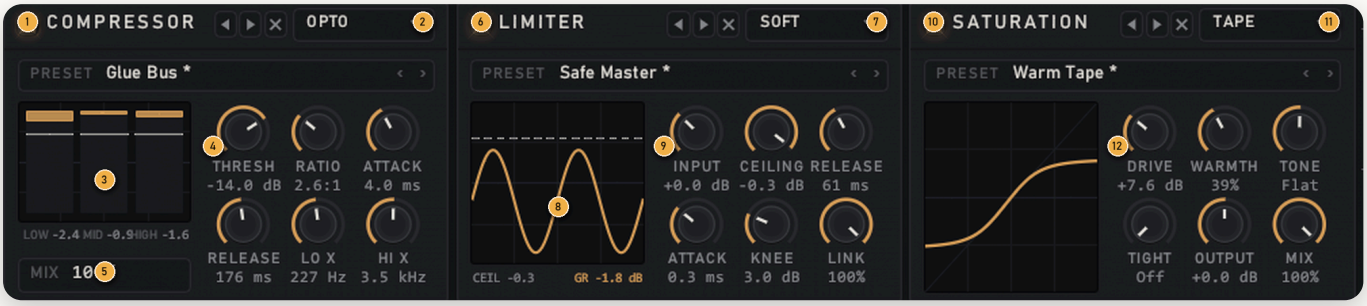

WHAT EACH NUMBER DOES

1. COMPRESSOR: on/off.
2. Model: OPTO (smooth) or VCA (tight).
3. Gain reduction of the three bands, in dB.
4. THRESH, RATIO, ATTACK, RELEASE, LO X and HI X (band crossovers).
5. MIX: parallel compression.
6. LIMITER: on/off.
7. Model: SOFT or TAPE.
8. Display with the ceiling (CEIL) and gain reduction (GR).
9. INPUT, CEILING, RELEASE, ATTACK, KNEE and LINK.
10. SATURATION: on/off.
11. Model: TAPE (round), TUBE (warm), TRANSISTOR (firm) or CONSOLE (subtle).
12. DRIVE, WARMTH (2nd harmonic), TONE, TIGHT (clean lows), OUTPUT and MIX. Level compensates itself as DRIVE goes up.

HOW TO USE

- REVERSE always sits at the end of the rack: LENGTH, FADE, FEEDBK, TONE, WIDTH and MIX.

> **Tip:** Keep the LIMITER last, with CEILING at −0.3 dB, so the DAW never clips.

3 8

MATRIX page: modulation matrix and macros

Every modulation link in a 16-row table, plus the targets of the 8 macros.

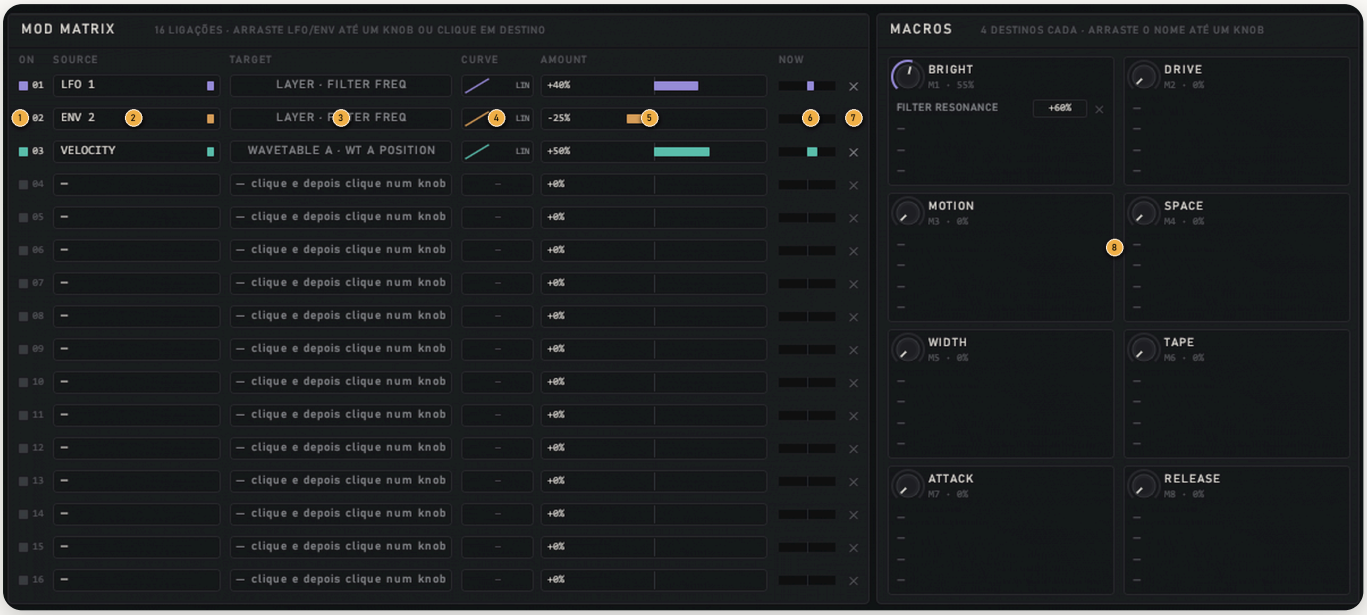

WHAT EACH NUMBER DOES

1. ON: the LED bypasses the link without deleting it.
2. SOURCE: the source (LFO 1–8, ENV 1–4, VELOCITY or MOD WHEEL).
3. TARGET: click, then click a knob to choose the destination.
4. CURVE: drag up or down (LIN, EXP or LOG). Double-click resets to LIN.
5. AMOUNT: from −100% to +100%.
6. NOW: live modulation meter.
7. × removes the link.
8. MACROS: 4 targets per macro, each with its own amount. Drag the name onto a knob.

HOW TO USE

- With EXP the modulation starts gently and grows towards the end; LOG does the opposite.

39

GLOBAL page

Interface preferences, MIDI controls and performance settings.

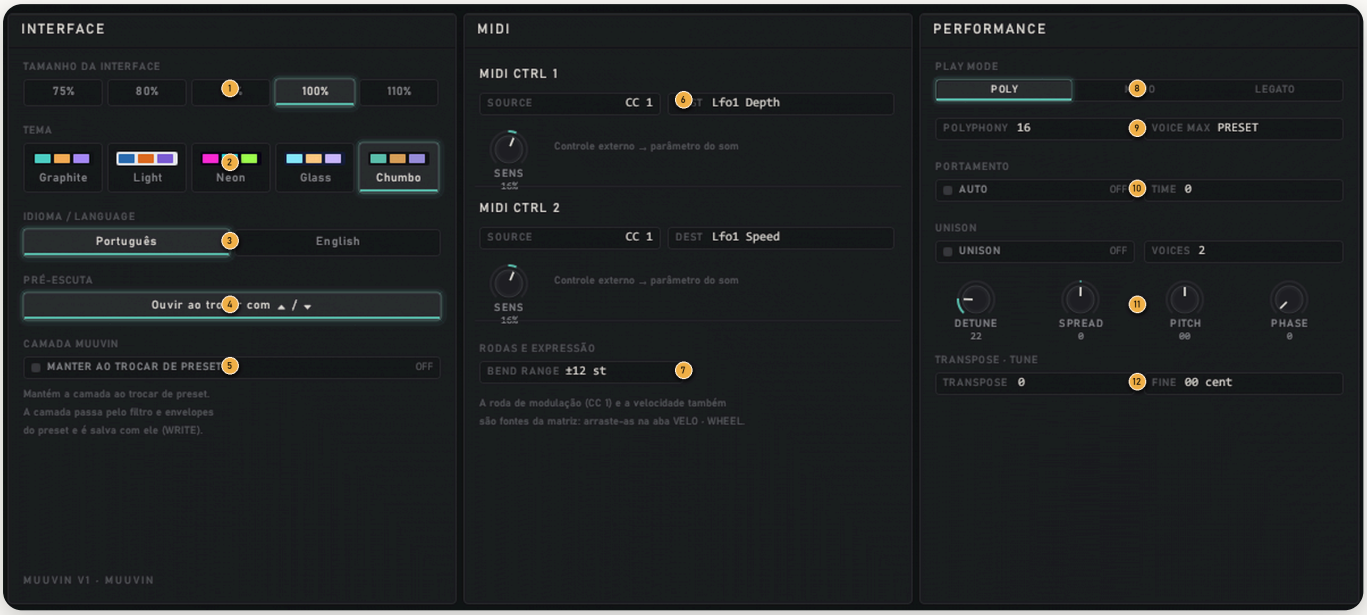

WHAT EACH NUMBER DOES

1. INTERFACE SIZE: 75% to 110%. The 1:1 button in the top bar returns to 100%.
2. THEME: Glass (default), Chumbo, Graphite, Light or Neon.
3. LANGUAGE: Português or English.
4. PREVIEW: plays a note when you change presets with ▲/▼.
5. MUUVIN LAYER: keeps the layer when you change presets.
6. MIDI CTRL 1 and 2: source (CC or pressure), destination and sensitivity.
7. BEND RANGE: pitch wheel range.
8. PLAY MODE: POLY, MONO or LEGATO.
9. POLYPHONY (up to 16 voices) and VOICE MAX.
10. PORTAMENTO: AUTO and TIME.
11. UNISON: VOICES, DETUNE, SPREAD, PITCH and PHASE.
12. Global TRANSPOSE and FINE.

40

Themes, size and language

MUUVIN V1 has 5 themes: Glass (default), Chumbo, Graphite, Light and Neon. Each theme's accent colour also paints the logo, knobs and LEDs. Size ranges from 75% to 110%, and the interface always fits whole inside the window.

WHAT EACH NUMBER DOES

1. Graphite: neutral dark.
2. Light: bright, for well-lit studios.
3. Neon: purple and magenta.
4. Glass (default): translucent blue, with high-contrast lettering.

HOW TO USE

- Choose the theme in GLOBAL › THEME or in the MENU. The choice applies to every instance.
- Size: GLOBAL › INTERFACE SIZE (75%, 80%, 90%, 100%, 110%).
- Language: GLOBAL › IDIOMA / LANGUAGE (Português or English). Text changes instantly.

> **Tip:** On small laptop screens, 90% or 100% is usually the most comfortable size.

41

Preset browser and tags

The browser opens on the side (☰) and shows imported banks, factory banks and favourites.

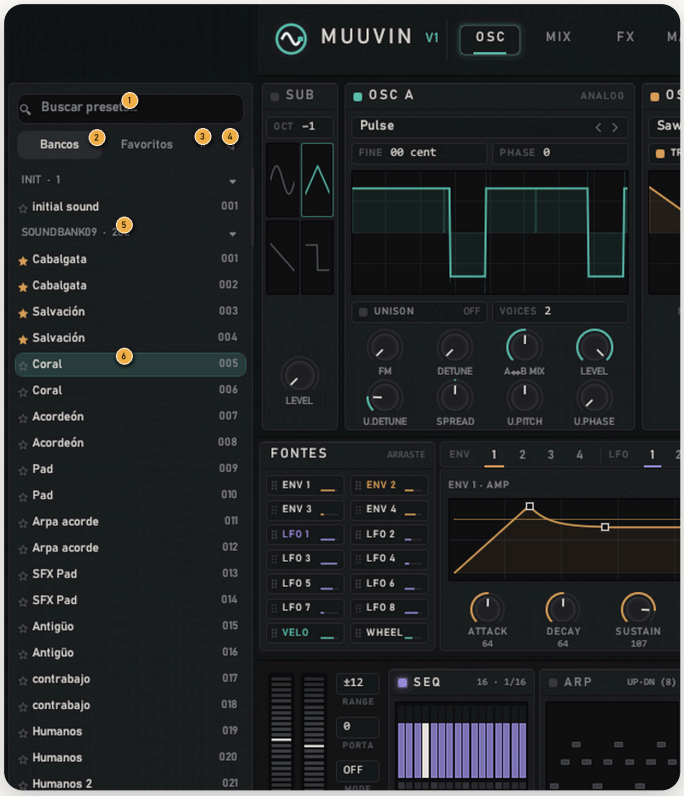

WHAT EACH NUMBER DOES

1. Search by name.
2. Banks and Favourites tabs.
3. #: tag filters (BASS, LEAD, PAD, PLUCK, KEYS, ARP, SEQ, FX, BRASS, STRINGS, 80s, WARM, DARK, BRIGHT, VINTAGE and CINEMA). Click includes; Alt + click excludes.
4. Imports every .zip bank in a folder.
5. Bank: click collapses or expands; the bin deletes it (asks for confirmation).
6. Preset: click to load. With the mouse over the plugin, the ▲/▼ arrows or Page Up/Page Down walk the list.
7. The display shows the loaded preset.

HOW TO USE

- To import .syl banks, use MENU › Import bank (folder or .zip). Each bank becomes a folder in the browser.
- Tags come from the preset name; presets with generic names may have no tag.

Search by vibe

Describe the sound you want in plain words and MUUVIN V1 finds the closest presets. Type something like "warm analog bass", "bright pad with movement" or "short plucky lead" into the browser search field.

WHAT EACH NUMBER DOES

1. The plugin reads what each preset actually does — brightness, attack, harmonics, movement, low end, density — and ranks the library by how well it matches.
2. Each result shows a relevance score and vibe tags (GRAVE, QUENTE, ANALÓG, PAD, MOV, LARGO…).
3. It all runs locally, inside the plugin: no internet, no AI, no waiting, and private.
4. It understands vibe words in Portuguese and English.
5. It respects the Banks/Favourites tabs and the tag filters (#): it only reorders what is already shown, by feel.
6. Type ordinary preset names and it still works as a normal name search.

HOW TO USE

- Combine it with the # tags and tabs: search by vibe reorders within what you already filtered.

4 3

Browser: tag filters

The browser's # button opens the tags. They are recognised from the preset name (bass, pad, lead…) and let you find sounds in large banks in seconds.

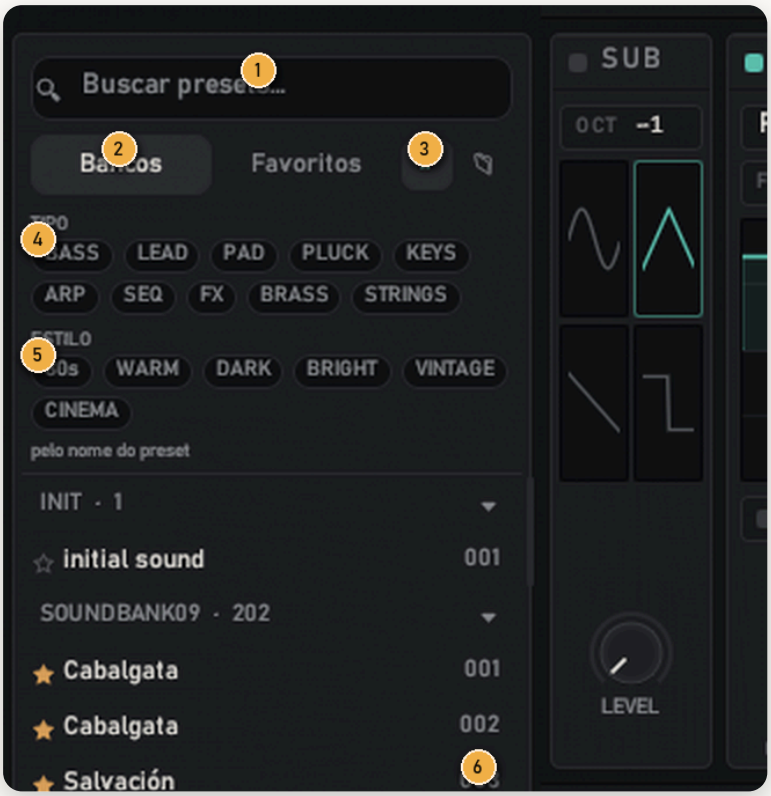

WHAT EACH NUMBER DOES

1. Search by name.
2. Banks and Favourites.
3. #: opens or closes the tags.
4. TYPE: BASS, LEAD, PAD, PLUCK, KEYS, ARP, SEQ, FX, BRASS, STRINGS.
5. STYLE: 80s, WARM, DARK, BRIGHT, VINTAGE, CINEMA.
6. Filtered list, with each preset's tag on the right.

HOW TO USE

- Click a tag to include it; Alt + click to exclude it.
- Several tags together show only presets that have all of them.

44

Main menu

The MENU button gathers import, export, preferences, the manuals and plugin information.

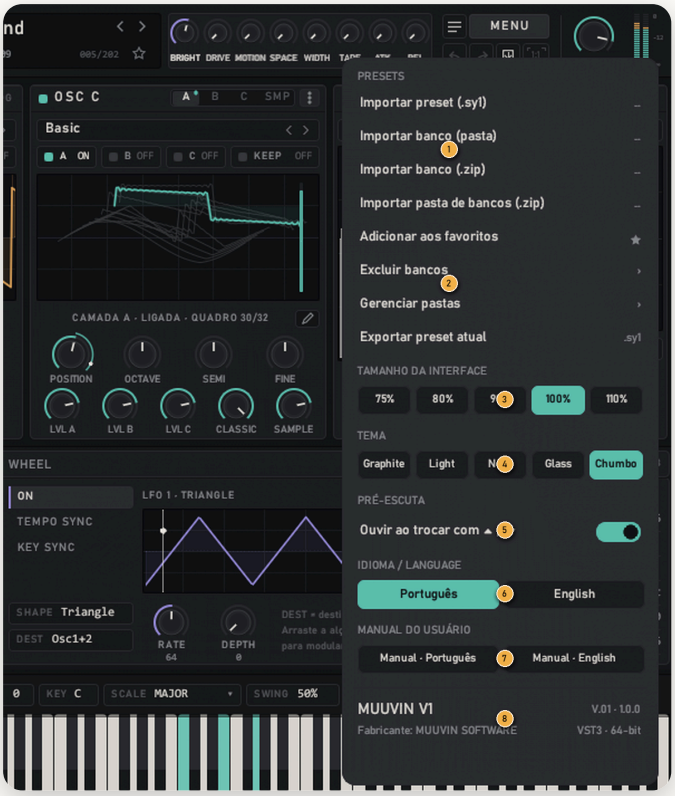

WHAT EACH NUMBER DOES

1. Import a preset (.syl), a bank (folder), a bank (.zip) or a folder of banks.
2. Favourites, delete banks, manage folders and export the current preset (.syl).
3. Interface size.
4. Colour theme.
5. Preview when changing presets.
6. Language.
7. USER MANUAL: opens this manual in Portuguese or English inside the plugin.
8. Plugin name, version and developer (MUUVIN SOFTWARE).

HOW TO USE

- Under MANUAL, choose Português or English: the manual opens inside the plugin.

45

Guide: Synth1 banks and presets (.sy1)

MUUVIN V1 reads banks and presets from the classic Synth1 synthesizer by Daichi (.sy1 format). It aims to keep the original sound fully faithful, with no robotic artefacts, clicks or distortion, and adds the warm MUUVIN analog character whenever you want. This guide shows the full route.

IMPORTING A BANK

- MENU › Import bank: pick a folder of .sy1 files or a .zip file.
- In the browser (☰), the folder icon imports several .zip files at once.
- The bank shows up in the list with up to 128 presets, in the original order.

OPENING A SINGLE PRESET

- MENU › Open preset and choose a .sy1 file.
- Or drag the file onto the plugin window.

KEEPING THE ORIGINAL SOUND

- ANALOG at OFF (DRIFT, TOLERANCE and HEAT).
- MUUVIN layers (wavetables, sample) off and KEEP in OFF.
- Effects rack off; the .sy1's own effects already play on their own.

GOING BEYOND THE ORIGINAL

- Add a wavetable or sample on top of the .sy1 preset to thicken it.
- Use the rack (TAPE, CHORUS, REVERB) to modernise without losing the character.
- Save as a new preset: the original stays untouched in the bank.

> **Tip:** The MUUVIN Analog Dreams (400) factory bank uses the same format. Synth1 is software by Daichi Laboratory; MUUVIN V1 is compatible with its files but is not affiliated with its author.

46

Sound recipes

Quick starting points from the "initial sound" preset. Adjust to taste: values are approximate.

ANALOG BASS

- OSC A Saw + SUB Square at −1 octave; Mono voicing with short Glide.
- FILTER LP24 Ladder, CUTOFF 25%, RESO 30%, ENV 60%.
- ENV 2: ATTACK 0, DECAY 30%, SUSTAIN 0. Rack: gentle DRIVE Tube.

WARM 80S PAD

- OSC A and OSC B Saw, DETUNE 15%; UNISON 4 voices.
- ENV 1: ATTACK 50%, RELEASE 60%. FILTER LP12 with a slow LFO on CUTOFF.
- ANALOG: DRIFT 20%, TOLERANCE 20%. Rack: CHORUS + TAPE + REVERB Hall.

SYNC LEAD

- OSC B Saw with SYNC; ENV 3 onto OSC B PITCH.
- Legato voicing with Glide; MOD WHEEL onto a vibrato LFO DEPTH.
- Rack: DELAY Ping-pong 1/8D at 25% MIX.

PLUCK AND ARPEGGIO

- Harmonics wavetable with POSITION modulated by a short ENV 4.
- ENV 1 and ENV 2 with short DECAY and SUSTAIN 0. ARP UP·DN, 2×, 1/16.
- Rack: ECHO Tape + REVERB Plate.

GRANULAR TEXTURE

- Load a vocal or chord in OSC C › SMP, GRANULAR mode.
- SIZE 200 ms, high DENSITY, SPRAY 30%, slow SCAN.
- ENV 1 with long ATTACK and RELEASE; large REVERB.

> **Tip:** Save each recipe as your own preset and name it with the type (bass, pad, lead): the browser tags recognise it automatically.

47

Shortcuts and troubleshooting

SHORTCUTS

Drag a knob	Changes the value
Shift + drag	Fine adjustment
Double-click a knob	Resets to default
Right-click a knob	Modulation list
Click a module name	Switches the module on or off
Click an effect in the EFFECTS list	Loads it into the empty rack slot
Drag a source or macro onto a knob	Creates the modulation
▲ / ▼ or Page Up / Page Down (mouse over the plugin)	Previous or next preset in the bank
Double-click the preset name	Rename
Tab / Shift + Tab (sample editor)	Next or previous slice
Mouse wheel (editors)	Zoom
Alt + click a tag	Excludes the tag from the filter

TROUBLESHOOTING

I can't update the plugin	Close the DAW: while it is open, the file is in use and the copy fails.
A .sy1 preset sounds different	Check that the ANALOG controls are OFF and that no MUUVIN layer (wavetable, sample or rack effect) was kept with KEEP.
An amber ! appears	Something is switched on but silent. Hover the ! to see what it is, or click to jump to it.
A module is greyed out	Click the module's square or name to switch it back on.
▲/▼ or Page Up/Down don't change presets	Keep the mouse over MUUVIN V1; some DAWs hold the keyboard focus.
The interface is too large or too small	Use GLOBAL › INTERFACE SIZE or MENU › Size.

48

Glossary

ADSR	Attack, Decay, Sustain, Release: the four stages of an envelope.
Aliasing	Harsh digital noise caused by harmonics above the sample-rate limit.
Cutoff	Frequency where the filter starts cutting the sound.
Detune	Small detuning between oscillators that thickens the sound.
Drift	Slow pitch wander typical of analog synths.
FM	Frequency modulation: one oscillator changes another's frequency.
Gate	How long a note stays on; in the GATE effect, rhythmic chopping.
Glide / Portamento	Pitch slide from one note to the next.
Grão	Small piece of audio used by the granular engine.
Key tracking	How much a parameter follows the played note.
LFO	Low-frequency oscillator used to create movement.
Macro	Knob that controls several parameters at once.
PWM	Pulse-width modulation; gives a lively, choral sound.
Resonance	Boost at the filter cutoff frequency.
Ring mod	Multiplies two signals; creates metallic tones.
Sync	Restarts one oscillator on another's cycle.
Unison	Several detuned copies of the same voice.
Velocity	How hard the key is played.
Wavetable	Series of waveforms (frames) scanned by POSITION.
.sy1	Preset and bank format MUUVIN V1 opens with the original sound.

MUUVIN V1 · © MUUVIN SOFTWARE