Assignment 2:

Networking Project


Name: Maureen Uzoewulu

Student ID: CSC26-05-NA-07

Date: June 6, 2026

Screenshot 1 –

Completed network topology in Cisco Packet Tracer

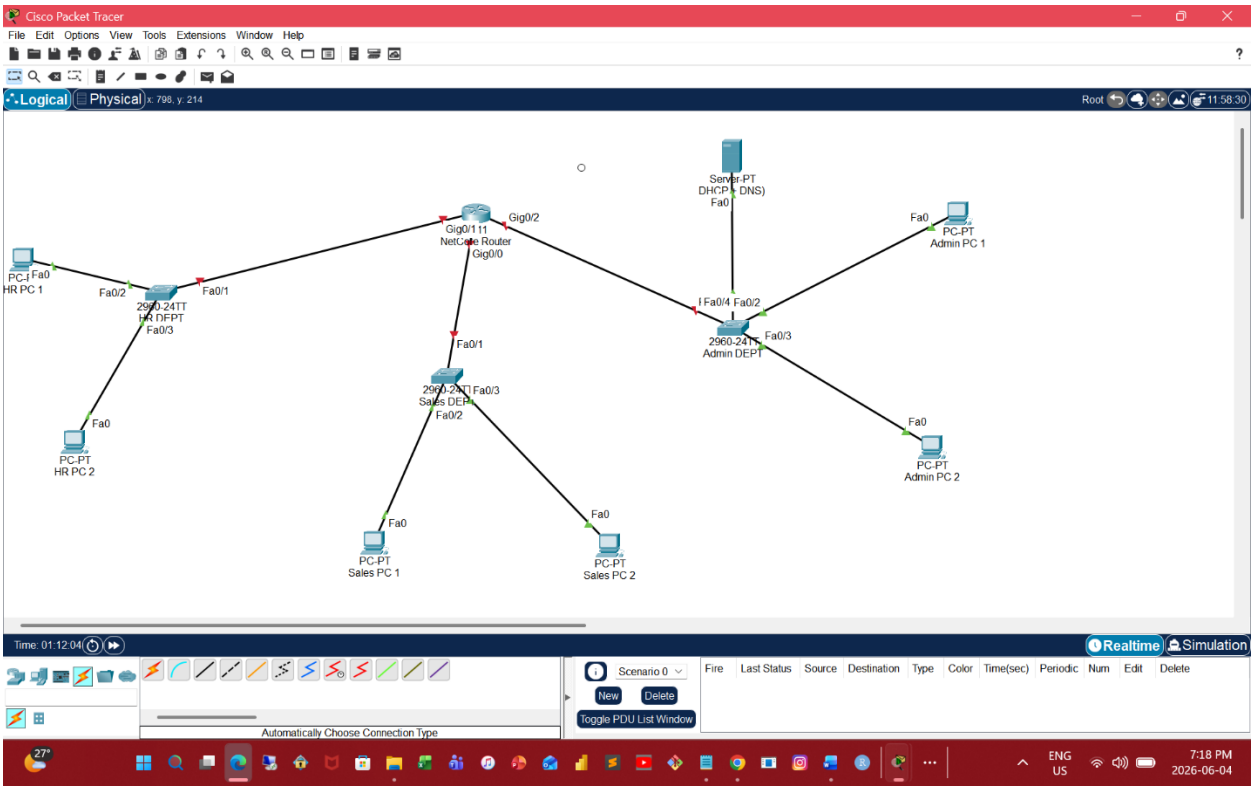


This screenshot shows that the router is connected to 3 departmental switches: Admin, Sales, and HR. Each department has 2 PCs, and the server is connected to the Admin department.

The red arrows show that the connections between the router and the switches have not been established.


Screenshot 2 –

IP address configuration on one PC per department


Admin Department – PC1

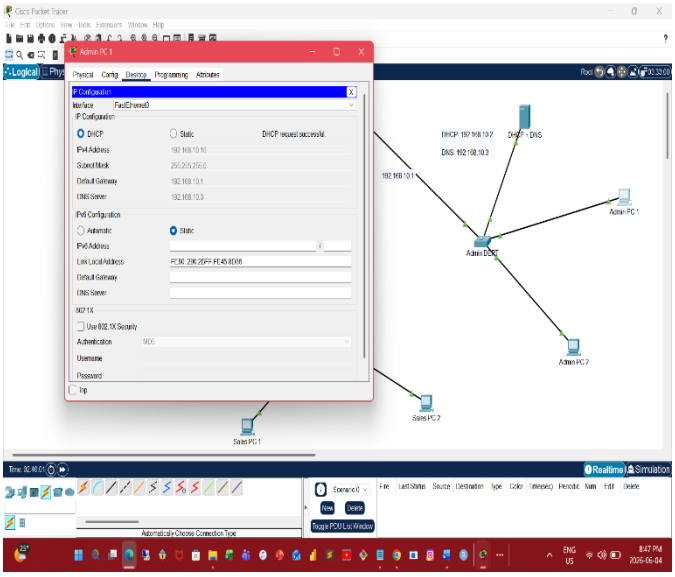

Sale Department – PC1

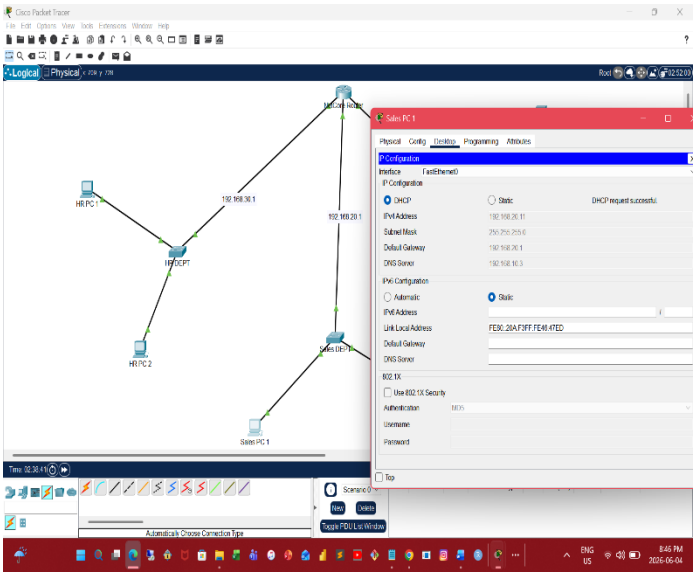

HR Department – PC1

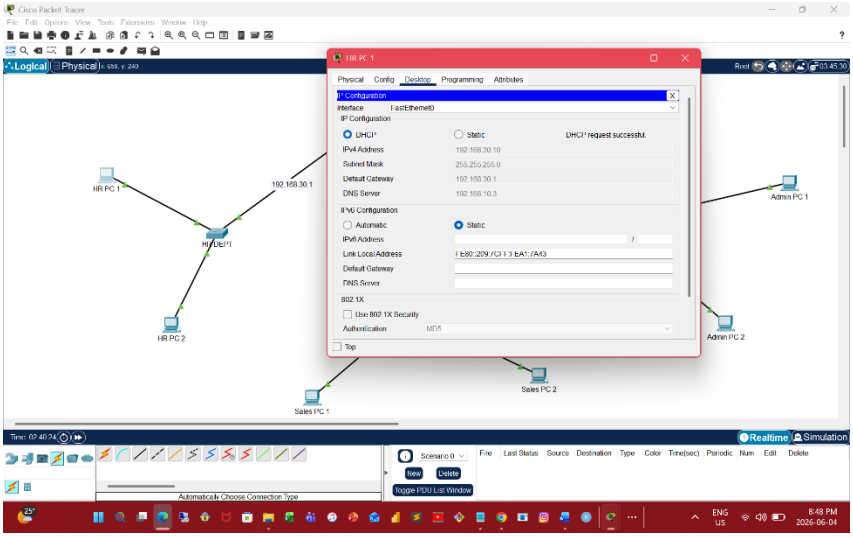

The IP address for Admin PC1 is 192.198.10.10.


The IP address for Sales PC1 192.198.20.11.

The IP address for HR PC1 is 192.198.30.10.


The “DHCP request successful” indicates that the devices are successfully connected to the server network.

Screenshot 3 –

Successful ping from a Sales PC to an Admin PC

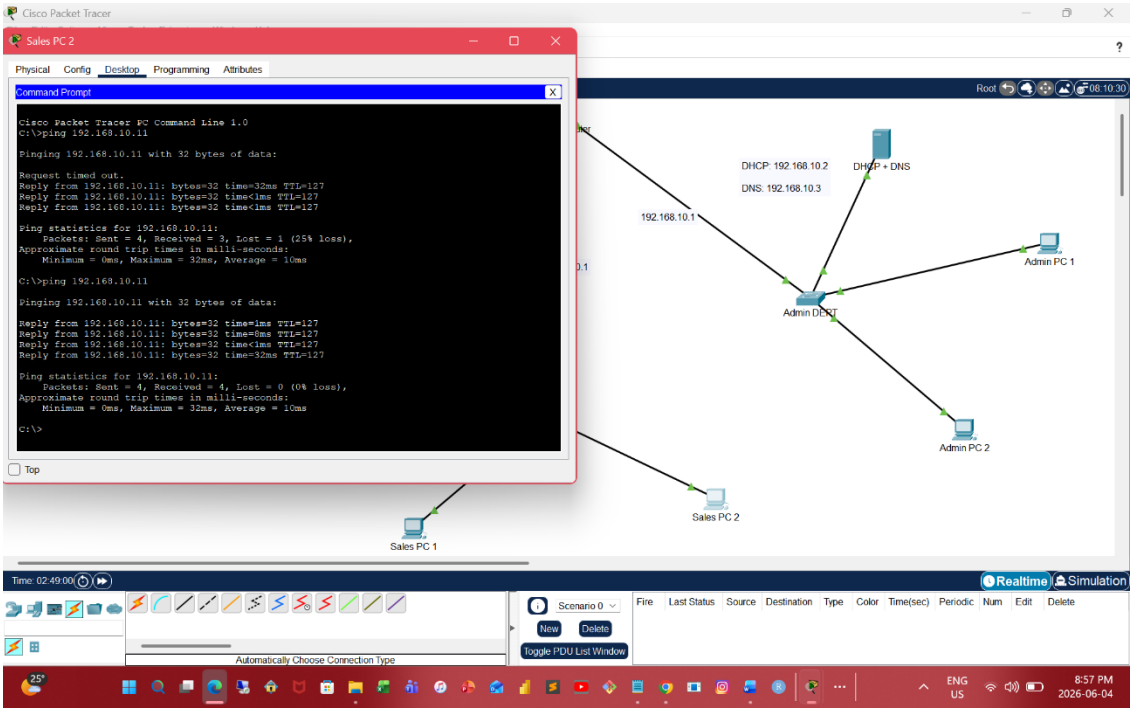


The request timed out initially because it was the first time a connection was being established between the two devices. With the next ping, it can be seen that the 0 packets were lost, confirming that the connection between Sales PC2 and Admin PC2 is very good. This was made possible after assigning IP addresses to each interface, and verifying the viability of the connections on the router CLI, as seen below

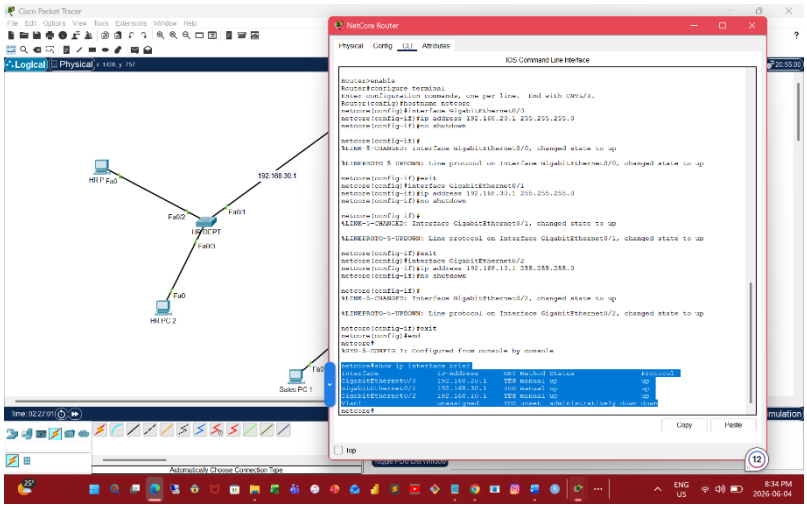

Screenshot 4 –


Failed ping from HR PC to Admin PC

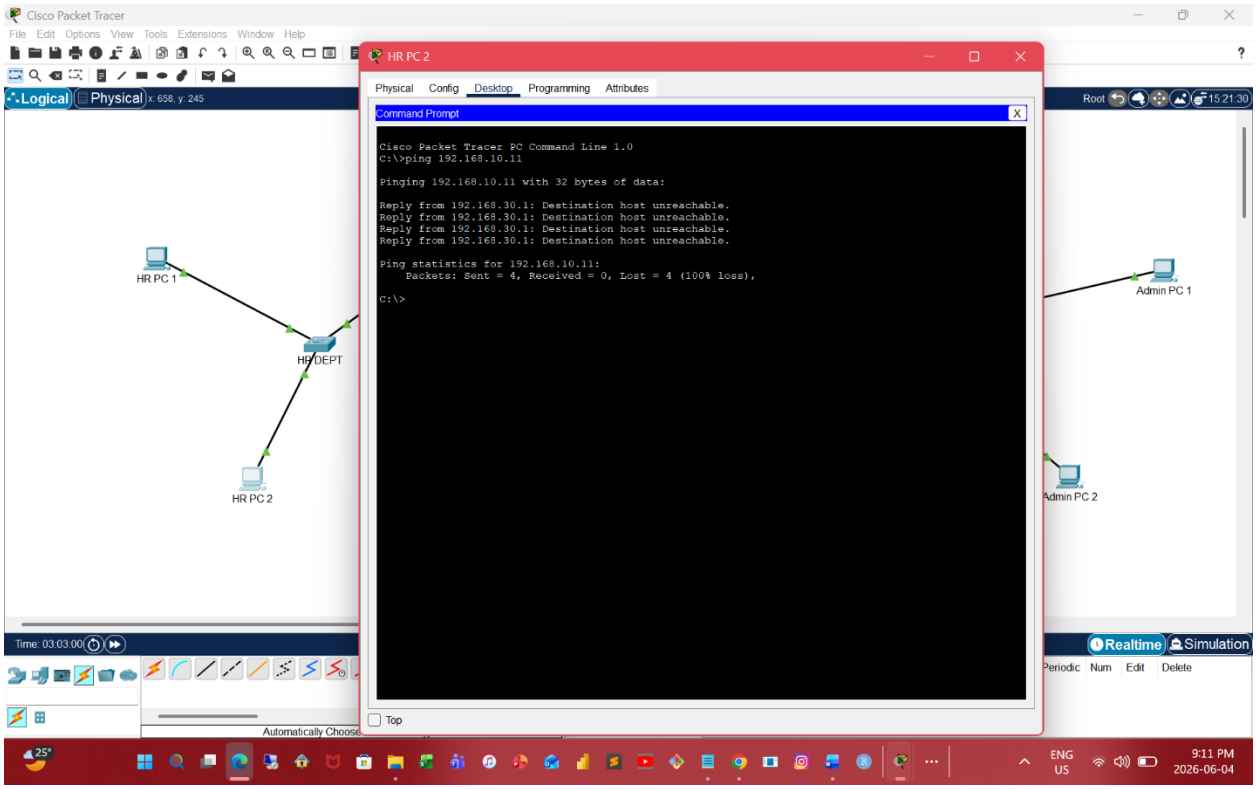

The ping between HR PC2 and Admin PC2 failed because a restriction was configured on the router CLI to deny network access between HR and Admin devices. The ACL command that enables this restriction is shown in screenshot 5.

Screenshot 5 –

ACL command

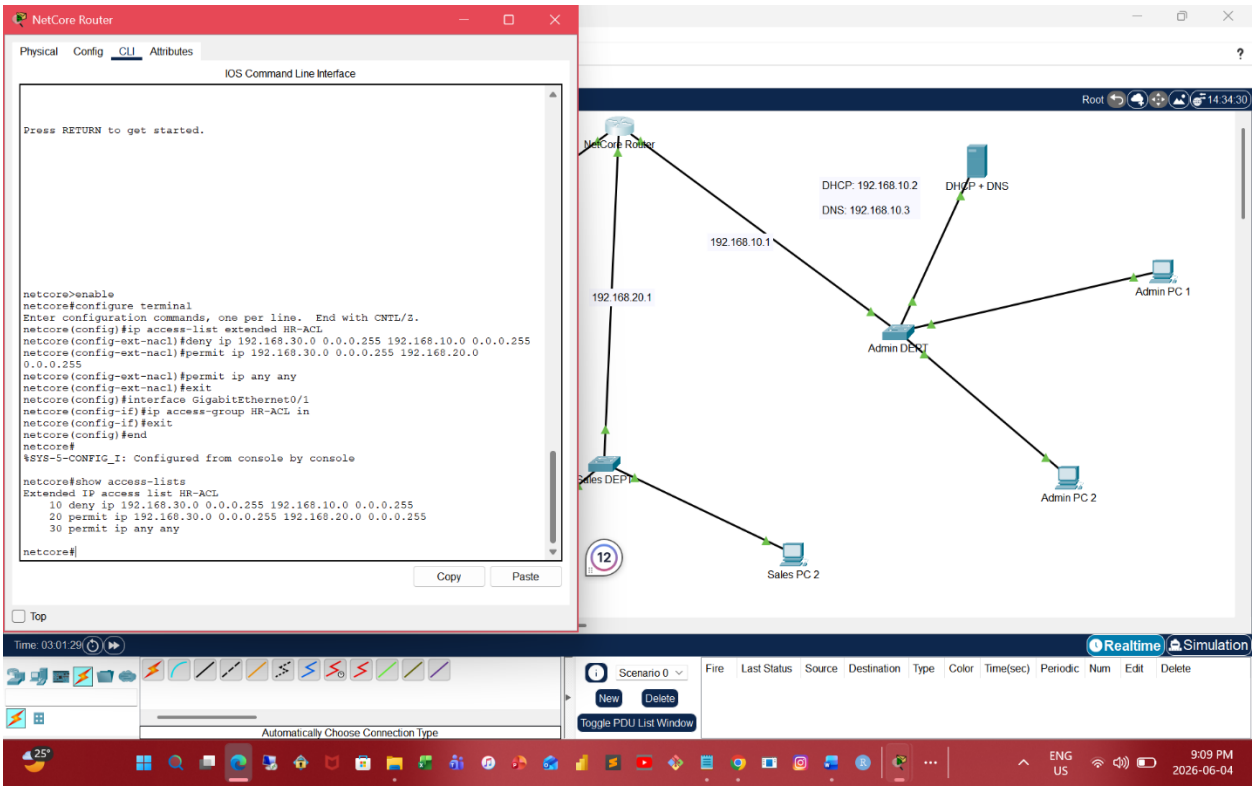

As mentioned above, a restriction was created via the ACL command between the HR and Admin devices, resulting in an unsuccessful ping.