



Note:

- R9 was placed with 0 ohm resistor
- Low pass filter (R10 and C10) can be removed by using R9 = 0 ohm and neglect C10
- R12-R20 can be changed to adjust the cut-off frequency of the low pass filter

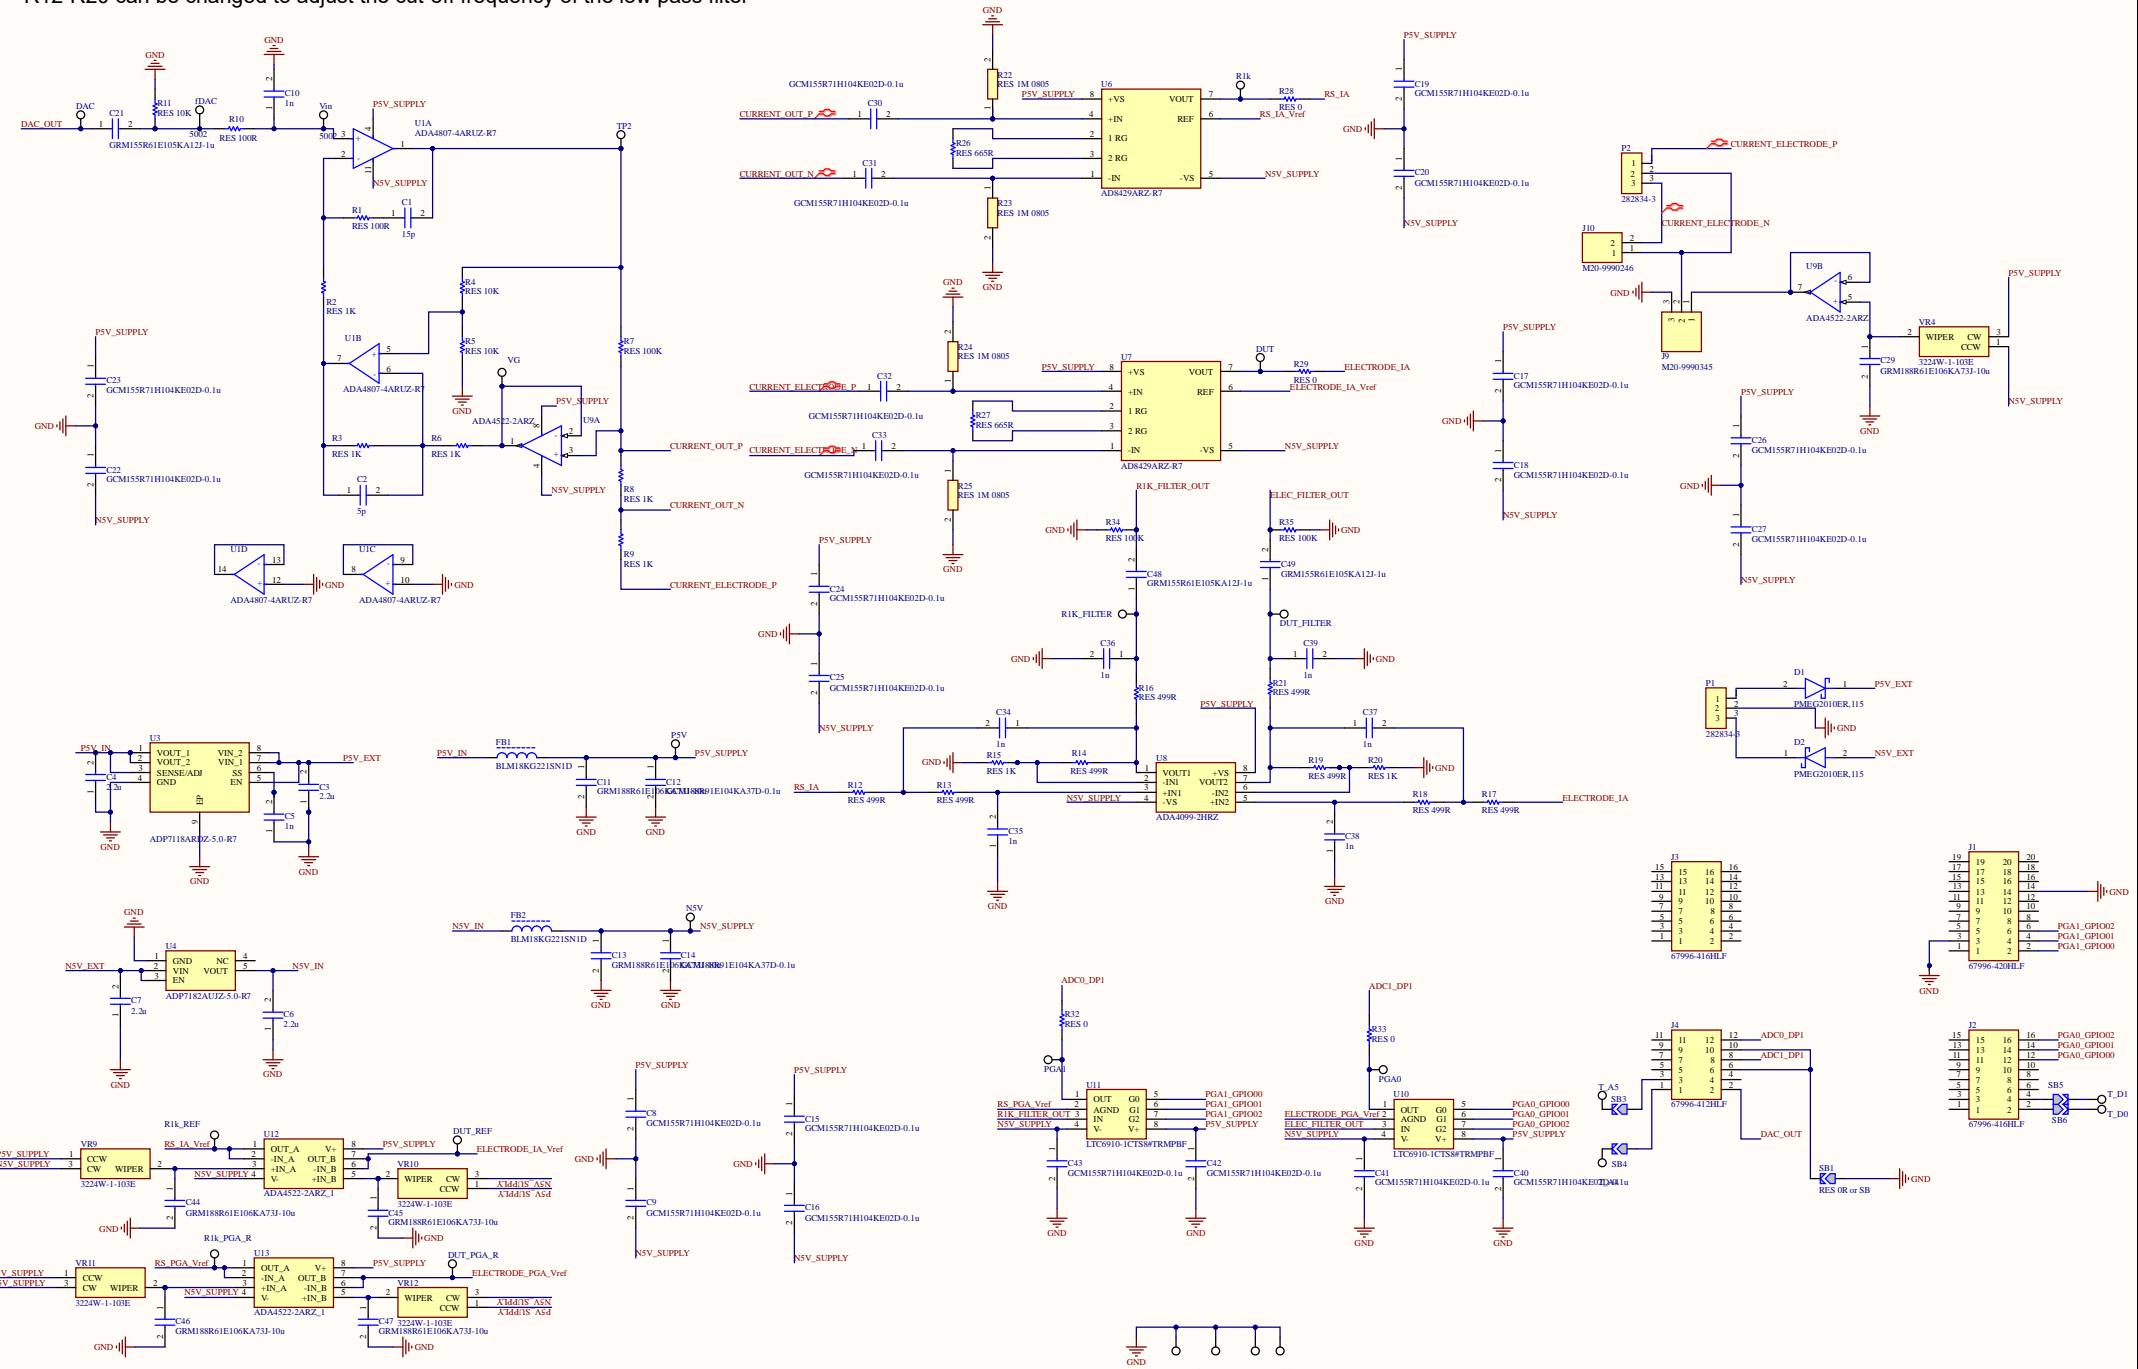

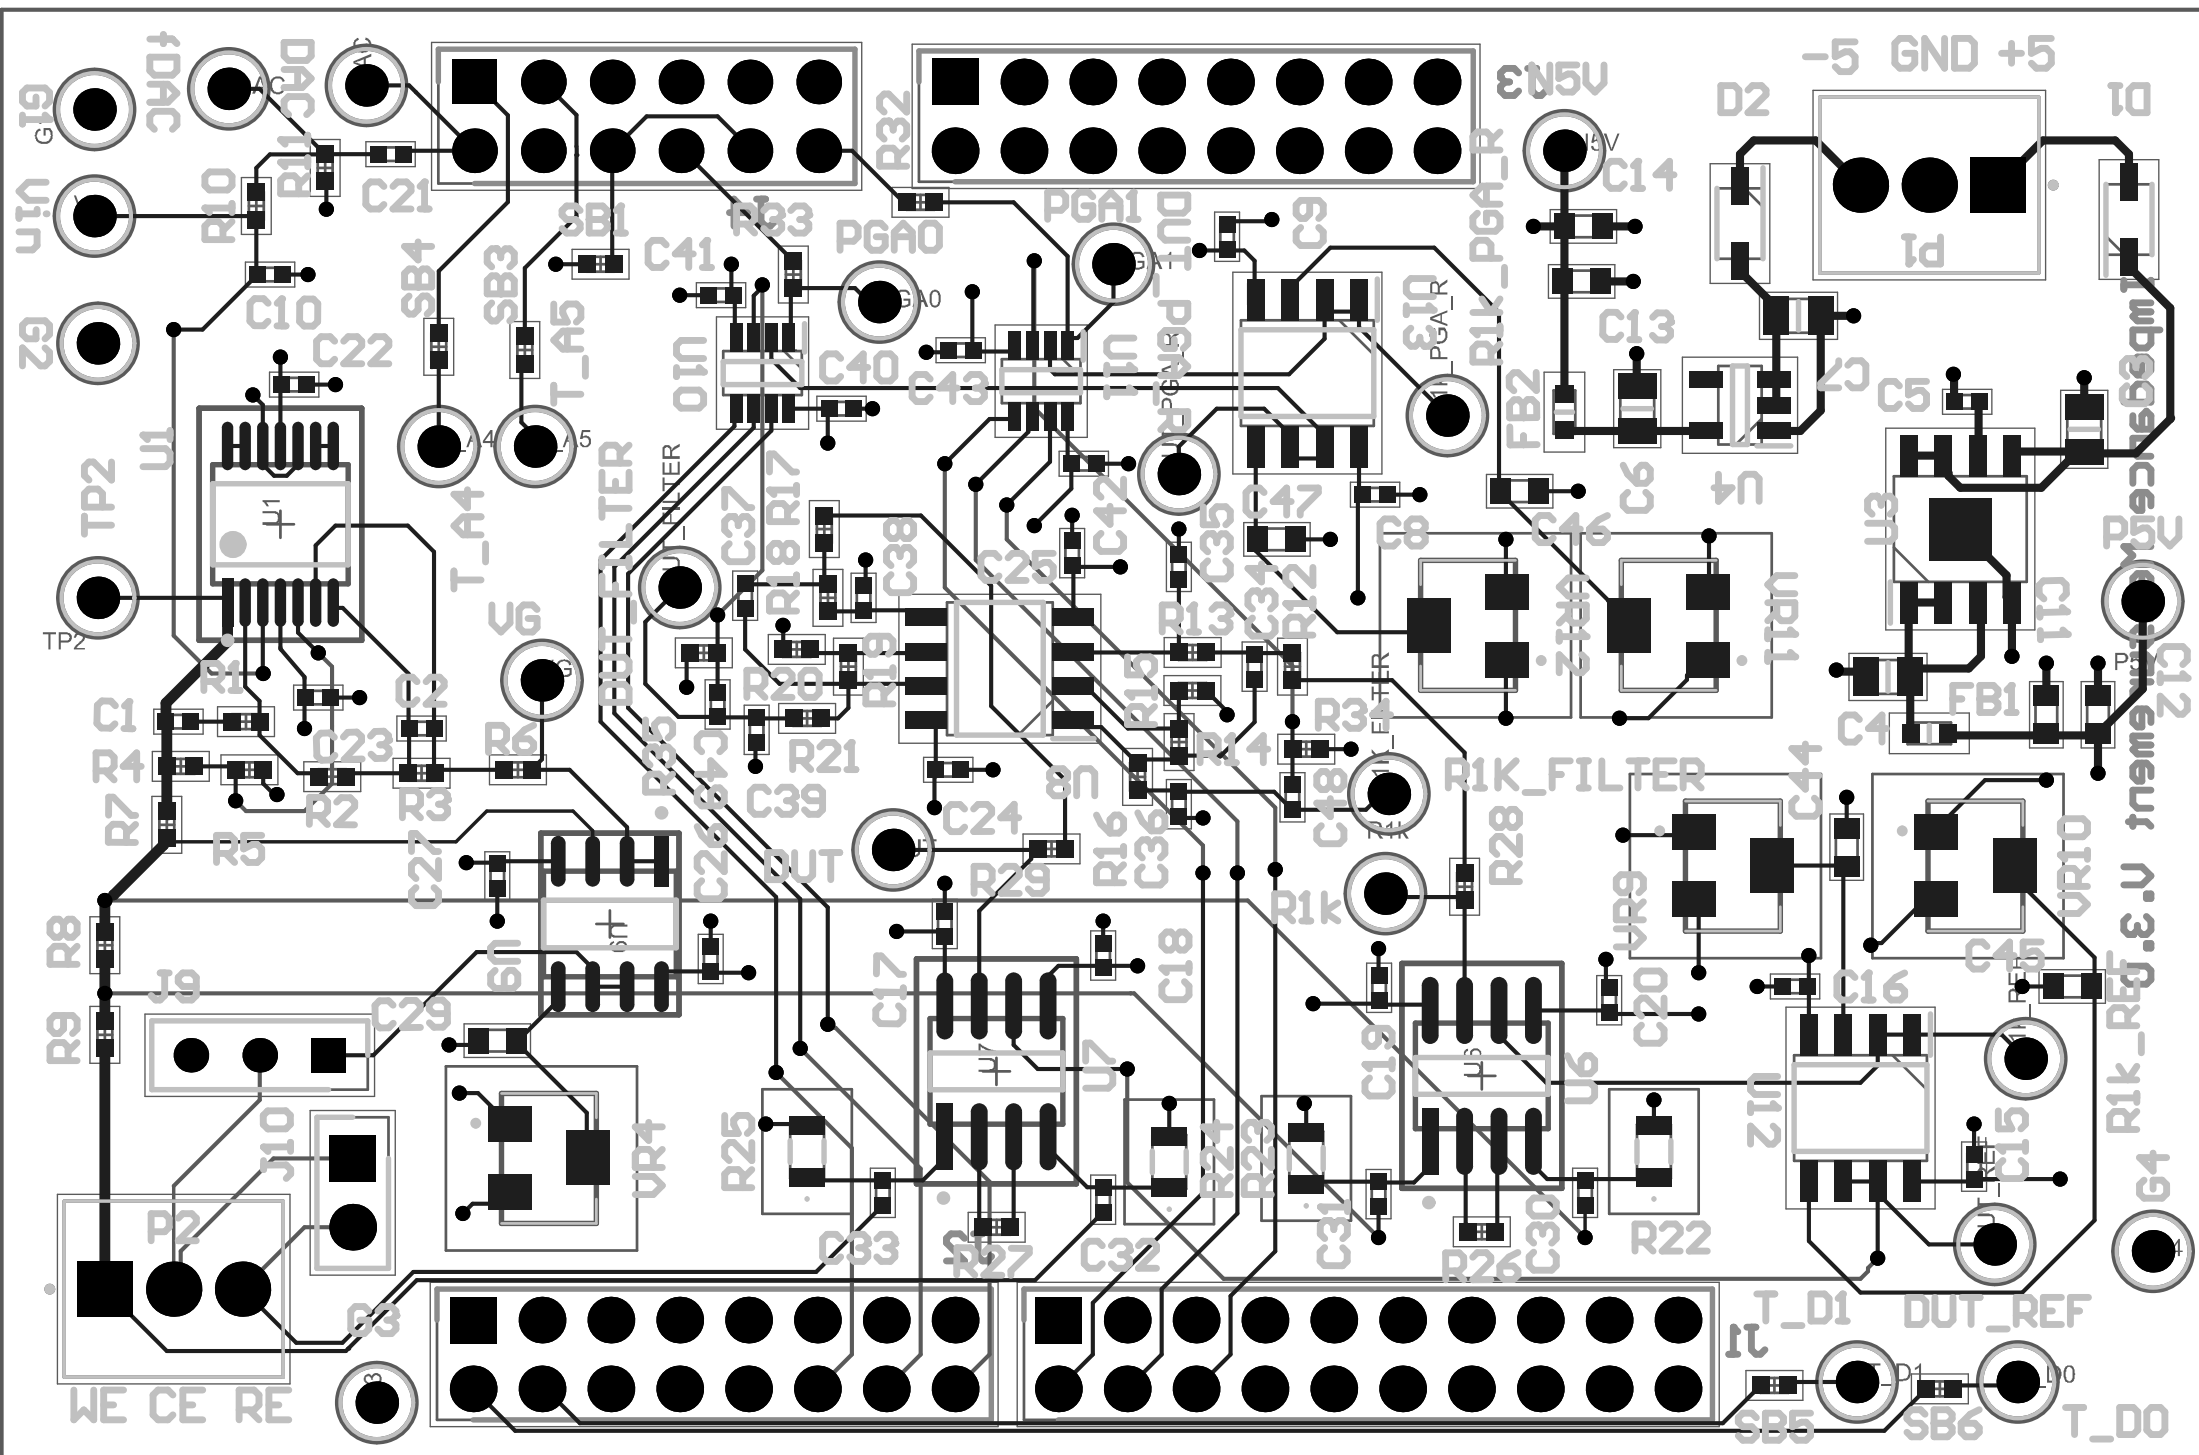

Board Stack Report