

Gazebo Motor & Propeller Model Notes

Matthew Vernacchia

Department of Aeronautics and Astronautics, MIT

December 9, 2018

This document describes the mathematics and physics behind the motor/propeller model used in PX’s Gazebo Software-in-the-Loop testing tool `sitl_gazebo`. It describes a standard propeller model used in aeronautics [Section 1], references sources for propeller data [Section 2], and then shows how to use this information to calculate the parameters used by the `sitl_gazebo` motor/propeller model [Sections 3, 4, 5]. It concludes with a discussion of sources of error in the model [Section 6].

1 Physical Model

Let’s begin with a simple physical model of the propeller. A short introduction to propeller theory is presented in [1], and one can read more details in McCormick’s book [2]. This model addresses the thrust and torque of a propeller which is moving through the air parallel to its axis of rotation.

The model uses the following variables:

- ρ , the air density (units: kg m^{-3})
- T , the thrust generated by the propeller (units: N)
- Q , the torque generated by the propeller (units: N m)
- P , the power required to drive the propeller (units: W).
- n , the rotation rate of the propeller (units: rev/s), and ω , the angular speed of the propeller (units: rad s^{-1}). $\omega = 2\pi n$.

- v_{\parallel} or v_0 , the velocity at which the propeller is moving into the air along the rotation axis of the propeller (units: m s^{-1})
- D , the propeller diameter (units: m).

To simulate the forces and moments on a quadrotor, we need to predict how T and Q vary with n . This is accomplished using four dimensionless parameters:

- $J = v_0/Dn$, the advance ratio.
- $C_T = T/\rho n^2 D^4$, the thrust coefficient (this is denoted as k_T in [1]).
- $C_Q = Q/\rho n^2 D^5$, the thrust coefficient (this is denoted as k_Q in [1]).
- $C_P = P/\rho n^3 D^5$, the thrust coefficient (this is denoted as k_P in [1]).

The thrust, torque, and power coefficients depend on the advance ratio J and the design of the propeller¹. To estimate the thrust and torque, we need to look up $C_T(J)$ and $C_Q(J)$ for our propeller, and then use:

$$T = C_T(J) \rho n^2 D^4 \quad (1)$$

$$Q = C_Q(J) \rho n^2 D^5 \quad (2)$$

The power and torque coefficients for all propellers are related by the equation $C_Q = C_P/2\pi$. Proof:

$$P = Q\omega = Q(2\pi n)$$

$$C_Q = \frac{Q}{\rho n^2 D^5} \left(\frac{n}{n} \right) = \frac{P}{2\pi \rho n^3 D^5}$$

$$C_Q = \frac{C_P}{2\pi} \quad (3)$$

Thus, while most references will list only $C_T(J)$ and $C_P(J)$, we can easily find C_Q .

¹The thrust, torque and power coefficients also depend on the Reynolds and Mach number at the tip of the propeller, but for most quadrotors this is a small effect.

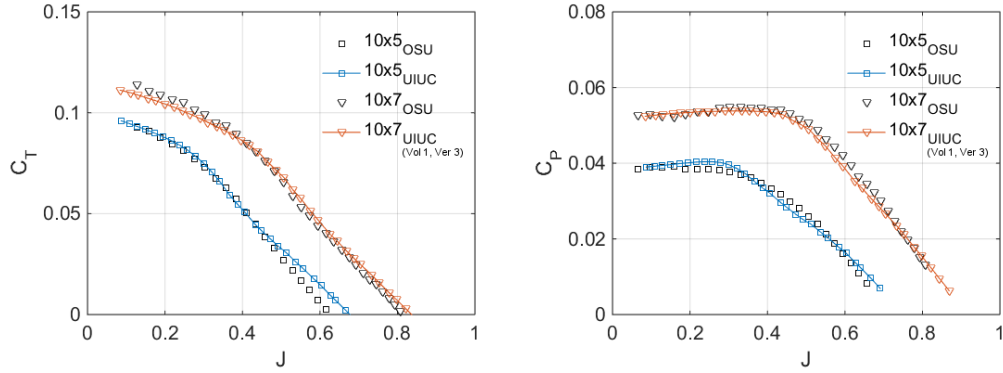


Figure 1: Example thrust and power coefficient data for two propellers (APC 10x5E and 10x7E). Reprinted from [5].

This model was developed for fixed-wing aircraft, and assumes that the air velocity is parallel to the rotation axis of the propeller. For quadrotors, the air velocity can also have a significant component perpendicular to rotation axis. This produces a force perpendicular to the thrust called the ‘H-force’. There are more complex models that attempt to predict the H-force. [3] provides a detailed derivation from blade element theory, and equations 1-2 of [4] give a low-order model valid around hovering.

2 Propeller Data

Now we need to look up $C_T(J)$ and $C_P(J)$. UIUC provides a database of such data for small UAV/model aircraft propellers, available at <https://m-selig.ae.illinois.edu/props/propDB.html>²

Figure 1 shows typical plots from this database. At static conditions, C_T usually between 0.05 and 0.2, and then declines almost linearly with increasing J . Zero thrust usually occurs at $J = 0.5$ to 1.0 . C_P is typically 0.03 to 0.3 at static conditions, and plateaus then declines with increasing J .

In the US, propellers are designated by two numbers “ $D_{in} \times p_{in}$ ”, where D_{in} is the diameter in inches and p_{in} is the pitch in inches³. If you cannot

²I’ve also included a zip file of the database in my repository (https://github.com/mvernacc/gazebo_motor_model_docs).

³The pitch angle β is the angle between the zero-lift line of the propeller blade section and the plane of rotation. The pitch p is $p = \pi D \tan \beta$ for a constant-pitch propeller.

find your vehicle’s propeller in the database, use the data from a propeller design with similar “ $D_{in} \times p_{in}$ ”.

If no data is available, reasonable guesses for two-blade model aircraft propellers at $J = 0$ (static) are $C_T = 0.1$ and $C_P = 0.05$ ($C_Q = 0.3$).

If you cannot find data for your propeller, you can also estimate the thrust and power coefficients using *blade element theory*. This is rather involved. JavaProp (<https://www.mh-aerotoools.de/airfoils/javaprop.htm>) is a free software package for perform these calculations.

3 Current PX4 Gazebo SITL Model

The source code for the PX4 Gazebo SITL motor/propeller model is available at https://github.com/PX4/sitl_gazebo/blob/master/src/gazebo_motor_model.cpp. This model uses notation that is different from the standard propeller model notation described above. Here I will attempt to provide a translation between the two models.

The thrust calculation is on line 194:

```
force = real_motor_velocity * real_motor_velocity * motor_constant_
```

Converting into the standard propeller model notation,

$$T = \omega^2(\text{motor_constant_}) = (2\pi n)^2(\text{motor_constant_}) = C_{T0}\rho n^2 D^4$$

Thus,

$$\text{motor_constant_} = \frac{C_{T0}\rho D^4}{(2\pi)^2} \quad (4)$$

where C_{T0} is the static thrust coefficient at $J = 0$. This implies that `motor_constant_` has units of kg m. Note that `motor_constant_` is proportional to the fourth(!) power of propeller diameter, so using the same `motor_constant_` for propellers of different diameters is very inaccurate.

The Gazebo model then compensates for decreasing thrust at higher propeller/air velocities. It scales the force computed above by a value `scalar` $\in [0, 1]$ (see . The scaling parameter is set to

$$\text{scalar} = 1 - \text{vel}/25.0$$

and then clamped to the range $[0, 1]$. This vaguely captures the general trend of declining thrust at higher airspeeds. It is not an accurate implementation of the standard propeller model, but the standard propeller model will not make accurate thrust vs. airspeed predictions for quadrotors because there is a significant perpendicular velocity component.

The current Gazebo model also includes an ‘H-force’ due to the perpendicular air velocity (see Line 221), using a formula from equation 1 in [4]:

$$H = -\omega\lambda_1 v_{\perp} \quad (5)$$

The parameter λ_1 is (somewhat confusingly) called the `rotor_drag_coefficient_` in the code. The parameter λ_1 is *not* dimensionless; it should have units of kilograms. No numerical values or physical relations for λ_1 are given in [4]. I do not know what value it should have or how it scales with rotor size ⁴. Perhaps [3] can give some insights?

The Gazebo model then computes the rotor torque magnitude to be `force * moment_constant_` (Line 233). This implies that the `moment_constant_` has units of meters. Under the standard propeller theory, the `moment_constant_` should be:

$$\begin{aligned} \text{moment_constant_} &= \frac{Q}{T} = \frac{C_{Q0}\rho n^2 D^5}{C_{T0}\rho n^2 D^4} \\ \text{moment_constant_} &= \frac{C_{Q0}}{C_{T0}} D \end{aligned} \quad (6)$$

Finally, the Gazebo model adds a ‘rolling moment’ (see Line 240). The ‘rolling moment’ is computed using the formula

$$M_{\text{rolling}} = -\omega\mu_1 v_{\perp} \quad (7)$$

which is taken for equation 2 in [4]. The parameter μ_1 is not dimensionless; it has units of kg m. Again, [4] does not give numerical values or physical formulas for μ_1 , and I do not know how it scales with rotor size ⁵. In the code, μ_1 is referred to as `rolling_moment_coefficient_`.

⁴ $\lambda_1 \sim \rho D^3$ would give the proper dimensionality.

⁵ $\mu_1 \sim \rho D^4$ would give the proper dimensionality.

4 Example for the Intel Aero Drone

The Intel Aero Drone uses 230 mm (9 inch) propellers from Yuneec. A spare parts seller for the Yuneec Typhoon H drone, which uses the same propellers, indicates that the propellers have pitch of 6 inches. There is a similar 9×6 propeller in the UIUC database (the APC Thin Electric 9×6), which has $C_{T0} = 0.11$ and $C_{P0} = 0.051$ ($C_{Q0} = 0.32$).

The `motor_constant_` is:

$$\text{motor_constant_} = \frac{C_{T0}\rho D^4}{(2\pi)^2} = \frac{0.11(1.22 \text{ kg m}^{-3})(0.23 \text{ m})^4}{(2\pi)^2} \quad (8)$$

$$\text{motor_constant_} = 9.5 \times 10^{-6} \text{ kg m} \quad (9)$$

And the `moment_constant_` is:

$$\text{moment_constant_} = \frac{C_{Q0}}{C_{T0}} D = \frac{0.32}{0.11} (0.23 \text{ m}) \quad (10)$$

$$\text{moment_constant_} = 0.67 \text{ m} \quad (11)$$

5 How to set the Model Parameters in the SDF File

The Gazebo quadrotor model is defined in an SDF file for each aircraft. Within the SDF, there is a `plugin` block for each motor/propeller. These blocks start with the tag

```
<plugin name='XXX' filename='libgazebo_motor_model.so'>
```

where XXX is a unique name of the motor (see e.g. Line 358 of `solo.sdf`).

Within this block, there are tags for the `motorConstant` and `momentConstant` (the variables are named in camelCase in the SDF, but using underscores in the C++ code).

The model parameters are defined for each motor/propeller separately, so if you edit the file you will have to change the value in four places (for a quadrotor with four propellers).

6 Conclusion: Model Error Sources And Steps Forward

The sections above show how to adjust the parameters of the current Gazebo motor/propeller model for the propeller diameter and propeller design of a particular multirotor. Adjusting the parameters for different propeller diameters should improve model fidelity, as some of the model parameters are very sensitive to diameter (they are proportional to D^4 or D^5).

I believe there are two major remaining sources of error in this model: 1) effects of propeller-air velocity perpendicular to the propeller rotation axis and 2) aerodynamic interactions of the propeller wake with the multirotor's body.

The Gazebo model makes some attempt to address the effects of propeller-air velocity perpendicular to the propeller rotation axis by implementing a model from [4]. However, only some of the force and moment terms in the model are implemented, and further [4] provides no verification of the accuracy of their aerodynamic model. A deeper aerodynamic analysis of propellers with off-axis airflow is found in [3] - this paper may be a good starting point for someone interested in improving this aspect of the model.

Aerodynamic interactions of the propeller wake with the multirotor's body will tend to reduce the thrust and moment generated by the propellers. On the Intel Aero Drone (which has fairly thick arms in the propeller wake) we found that setting `moment_constant_` to about half the 'theoretical' value (0.3 instead of 0.67) gave simulation behavior more similar to real flight.

References

- [1] Z. S. Spakovszky, E. M. Greitzer, and I. A. Waitz, *Performance of propellers*. [Online]. Available: <http://web.mit.edu/16.unified/www/FALL/thermodynamics/notes/node86.html>.
- [2] B. W. McCormick, *Aerodynamics, Aeronautics and Flight Mechanics*. New York: John Wiley and Sons, 1979.
- [3] M. Bangura, M. Melega, R. Naldi, and R. Mahony, "Aerodynamics of Rotor Blades for Quadrotors," *arXiv e-prints*, arXiv:1601.00733, arXiv:1601.00733, Jan. 2016. arXiv: 1601.00733 [physics.flu-dyn].

- [4] P. Martin and E. Salaun, “The True Role of Accelerometer Feedback in Quadrotor Control,” working paper or preprint, Sep. 2009, [Online]. Available: <https://hal.archives-ouvertes.fr/hal-00422423>.
- [5] UIUC Applied Aerodynamics Group, *UIUC propeller data site*. [Online]. Available: <https://m-selig.ae.illinois.edu/props/propDB.html>.