



Design Standards

Rev. 12.2025

Table of Contents

TABLE OF CONTENTS	1
BASE / SHELL BUILDING REQUIREMENTS	2
DESIGN PROCESS	3
CLUB LAYOUT	
• COMPONENTS, AMENITIES & FEATURES	4 - 8
• FINISHES & MATERIALS	9 - 14
• CEILINGS & SOFFITS	15 - 16
• LIGHTING	17 - 19
• NON-TRADITIONAL LEASE SPACES	19 - 21
• ACCESSORIES & MISC.	22 - 28
BUILDING SYSTEMS	
• MECHANICAL	29
• ELECTRICAL	30 - 32
• PLUMBING	33
• INFORMATION TECHNOLOGY	34 – 35
• SECURITY	36 - 39
SIGNAGE	40
HELPFUL HINTS	41
DEVELOPMENT PROCESS	42 – 43
INTERIOR FINISHES	44 – 46
REMODEL SCOPE	47 – 53

Base / Shell Building Requirements

Design Requirements

Once you have selected a site, you will need to ensure it meets the minimum requirements before proceeding with the design of your club and prior to signing your lease.

- The space must be able to achieve a minimum clear ceiling height of 10 feet throughout the entire space on all floors or levels.
- An open ceiling design is preferred.
- The space must be a minimum of 40 feet in width.



Design Process

The design and layout of your club is the critical first step in creating an exceptional member experience. You will work directly with a Construction Design Manager to ensure your club meets the brand standards and functionality of an Anytime Fitness Club. This section provides an overview to the steps involved in the design process

1. **REAL ESTATE** Work with your SEB Real Estate Manager and Store Development Coordinator (SDC) on the Site Approval for your club.
2. **CLUB LAYOUT / DESIGN** Your Construction Design Manager (CDM) will contact you after you receive site approval to initiate the design of your club. You will work with your CDM to create the approved design for your club. You will need to provide your CDM with the existing site conditions information. This is accomplished through as-built plans or a site survey, along with comprehensive photos, videos and virtual tours of the space/shell building.
3. **EXTERIOR SIGNAGE** Contact one of the Designated Sign Vendors listed on the Vendor Portal (to initiate the process for approval, fabrication and installation of your exterior sign). This is a lengthy process, so don't delay.
4. **ARCHITECT / CONSTRUCTION DRAWINGS** Contract with the Designated Architect to create a full set of construction documents matching the detail and format of the Anytime Fitness prototype drawings and the DCP. The Designated Architect has the experience and brand knowledge to meet this requirement.
5. **PERMIT AND APPROVALS** Submit your construction documents for permits and approvals with the governing authorities and your landlord. It is recommended you contract with your architect to handle this step.
6. **GENERAL CONTRACTOR / BIDDING** Obtain bids from a qualified general contractor. We recommend competitively bidding your project w/ a min. of 3 qualified general contractors. bids. Allow 3 weeks for the bidding process. Once you receive your bids, you will need to qualify the numbers, select a general contractor, award the project, set a schedule with your GC and execute a contract. You are required to submit a detailed line item cost breakdown "Schedule of Values" (SOV) from the GC prior to starting construction.

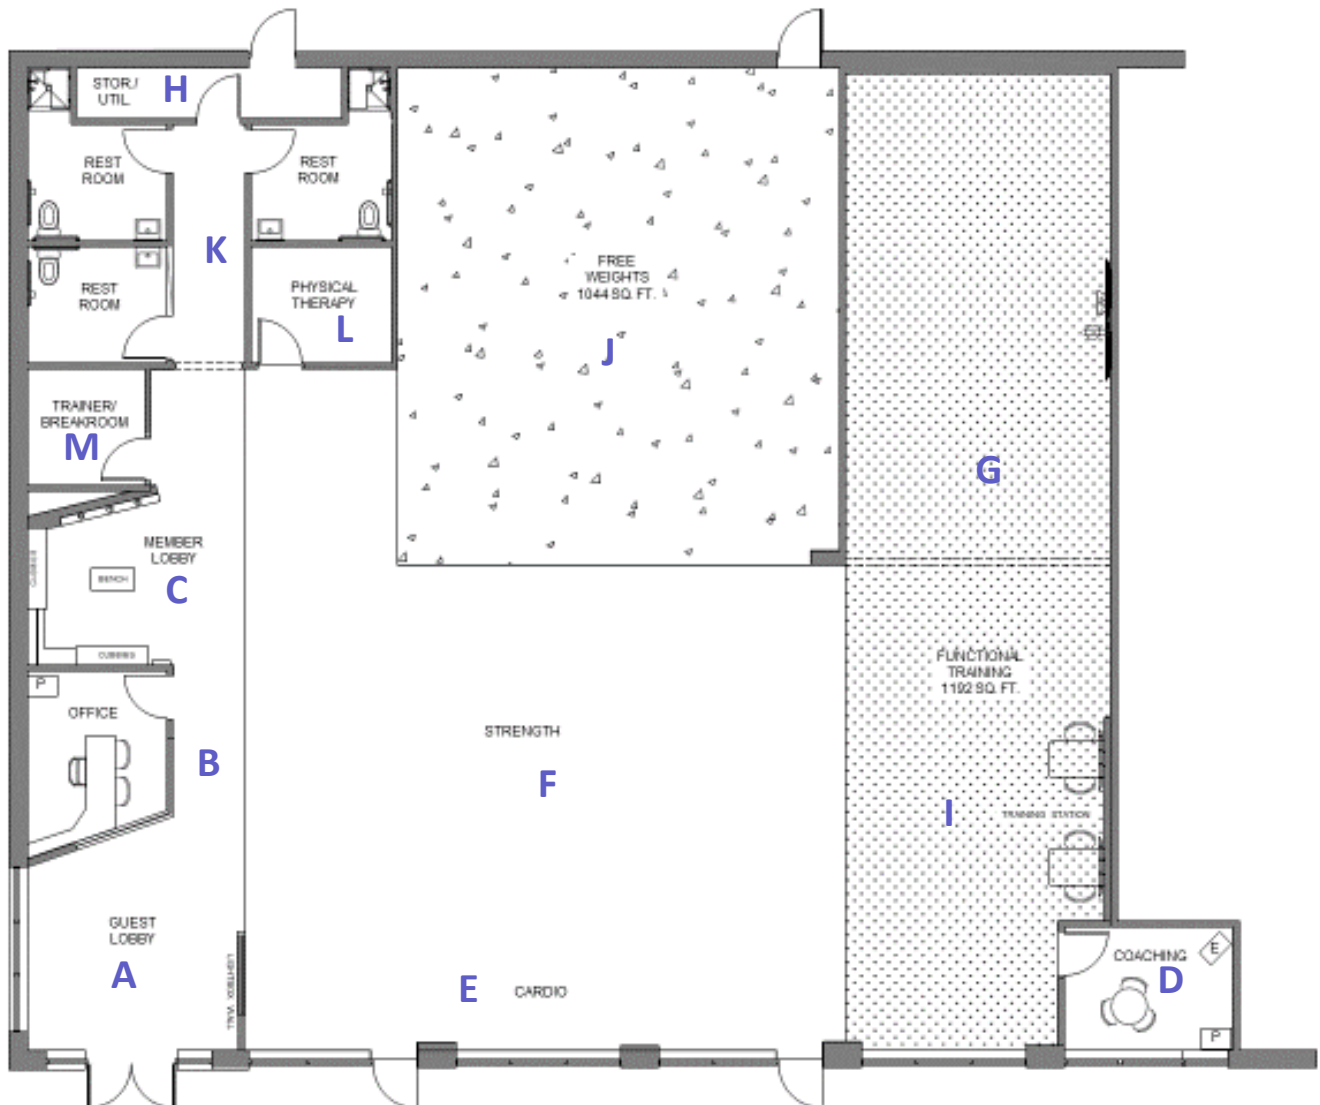
NOTE: Anytime Fitness will create the original compliance drawing for new clubs at no cost to the franchisee. If an alternate plan or revisions are required, the franchisee will be responsible for any related costs to the Designated Architect.

Club Layout

The configuration of your club may vary greatly from what is shown. This sample plan and the corresponding description of each item on the pages that follow will help you understand the various factors managed by your CDM in creating the most effective layout.

AREA/ FEATURE/ ELEMENT

A	Guest Lobby	H	Utility Room
B	Office	I	Training Station
C	Member Lobby	J	Free Weights
D	Coaching Room	K	Restrooms / Showers
E	Cardio Area	L	Recovery – Physical Therapy or Other Modality (Optional)
F	Strength Training	M	Breakroom (Optional)
G	Functional Training		



Your club must be able to accommodate the minimum equipment package
Before optional elements can be included in the design.

	SPACE/ AREA	DESCRIPTION
A	Guest Lobby	USE: 1st impression, Guest waiting area and sign-in during sales hours. SIZE: 10'-0" x 15' min. with minimum 7' wide opening view to main portion of the club. LOCATION: Immediately inside entry door. FEATURES/COMPONENTS: Lightbox Wall and lit AF Logo Sign, Bench, Decorative Lighting, QR Code Stand CEILING: Open to the deck or 2' x 2' acoustic ceiling height 10'-0" to 12'-0" AFF. • SEE "CEILINGS & SOFFITS" FOR MORE INFORMATION. • REFER TO DCP FOR REQUIRED & RECOMMENDED FURNITURE, EQUIPMENT, AND ACCESSORIES. • SEE "BUILDING SYSTEMS" FOR MEMBER ENTRANCE SECURITY & MONITORING REQUIREMENTS.
B	Main Office	USE: Membership Sales, run the business. SIZE: Approximately 10'-0" x 10'-0" min. Walls to extend to the roof deck, existing acoustical ceiling or 12'-0" minimum. LOCATION: Adjacent to Guest Lobby with direct line of site to doors. CEILING: 2' x 2' acoustic ceiling, height 10'-0" A.F.F. COMPONENTS: Logo sign, Corner, frameless windows visibility to the Guest Lobby and main club. Wood doors with window and transom above. Doors to open access main club vs. Guest Lobby. Offices with angled wall are required to have custom angled desk. The office will house your security system and computer. • SEE "CEILINGS & SOFFITS" FOR MORE INFORMATION. • REFER TO DCP FOR REQUIRED & RECOMMENDED FURNITURE, EQUIPMENT, AND ACCESSORIES. • SEE "BUILDING SYSTEMS" FOR MEMBER ENTRANCE SECURITY & MONITORING REQUIREMENTS.
C	Member Lobby	USE: Short-term storage for member shoes, coats, and bags; member communications SIZE: 10'-0" x 10'-0" min. LOCATION: Adjacent to Mgrs. Office, close, but screened Guest Lobby, but screened from view. FEATURES/COMPONENTS: Feature Wall, Decorative Lighting, Member Communication Kit, Decorative Lighting, Black Cubbies, Bench, Rock Boot Tray, 911 Center CEILING: Open to the deck or 2' x 2' acoustic ceiling height 10'-0" to 12'-0" AFF. • SEE "CEILINGS & SOFFITS" FOR MORE INFORMATION. • REFER TO DCP FOR REQUIRED & RECOMMENDED FURNITURE, EQUIPMENT, AND ACCESSORIES.

	SPACE/ AREA	DESCRIPTION
D	Coaching Room	USE: One on one client interaction and coaching conversations SIZE: Approximately 8'-0" x 10'-0". Walls to extend to the roof deck, existing acoustical ceiling or 12'-0" minimum. LOCATION: Location adjacent to the Functional Training area CEILING: 2' x 2' acoustical is recommended, height 10'-0" A.F.F. FEATURES/COMPONENTS: Full glass door equipped with lockable latch set. Evolt, printer table specified chairs and tables, desks not permitted • SEE "CEILINGS & SOFFITS" FOR MORE INFORMATION. • REFER TO DCP FOR REQUIRED & RECOMMENDED FURNITURE, EQUIPMENT, AND ACCESSORIES.
E	Cardio Area	LOCATION: Adjacent to windows with view to the exterior (preferred); may be adjacent to strength training. CEILING: No ceiling – an open ceiling/deck design is recommended. • SEE "BUILDING SYSTEMS" FOR DATA, POWER, AND HVAC REQUIREMENTS.
F	Strength Training	LOCATION: Centralized within club and adjacent to cardio area. CEILING: No ceiling – an open ceiling/deck design is recommended. • SEE "BUILDING SYSTEMS" FOR DATA, POWER, AND HVAC REQUIREMENTS.
G	Functional Training	USE: Group training and individual functional workout. SIZE: 500 S.F. minimum LOCATION: In an area that is visible to the main area of the club, preferably in a corner. The turf must be adjacent to at least one wall and cannot be free floating in the middle of the club. The area must be accessible from the main part of the club. It should not be enclosed in a room. FEATURES/COMPONENTS: Turf, Functional Training Racks, AF Training Station Graphic (optional furniture), Training Communications Kit, Hyperice 3x2 percussion therapy (required for new clubs and highly recommended for remodeling clubs). CEILING: No ceiling – an open ceiling/deck design is recommended • REFER TO DCP FOR REQUIRED & RECOMMENDED FURNITURE, EQUIPMENT, AND ACCESSORIES. • REFER TO DCP FOR REQUIRED & RECOMMENDED EQUIPMENT, DATA AND POWER REQUIREMENTS.

	SPACE/AREA	DESCRIPTION
H	Utility Room	LOCATION: At the rear of your club. SIZE (UTILITY ROOM): Sized to fit and access all necessary components, including – but not limited to – water heater, mop sink, electrical panel, etc. Connected to restrooms via tile walkway/ impervious cleanable surface. Walls should extend to underside of roof deck. <u>COMPONENTS:</u> Utility Room: Water heater, Mop Sink, Storage Shelving CEILING: 2' x 2' acoustical ceiling or open to deck, requires walls built to the deck.
I	AF Training Station	USE: Trainer daily activities, member interactions LOCATION: On or adjacent to the turf with high visibility to the workout floor and entry SIZE: (1) station 8' x 8' or (2) stations 12' X 8' FEATURES/COMPONENTS: <u>Signage Graphic Required</u>, counter height table, counter height stools, TV is optional. If purchasing table and stools, required to use approved vendor. CEILING: No ceiling – an open ceiling/deck design is recommended. • REFER TO DCP FOR REQUIRED & RECOMMENDED FURNITURE, EQUIPMENT, AND ACCESSORIES. • REFER TO DCP FOR REQUIRED & RECOMMENDED EQUIPMENT, DATA AND POWER REQUIREMENTS.
J	Free Weight Area	LOCATION: View of the space slightly obstructed from main entry points. SIZE: 1,000 s.f.. minimum to accommodate standard free weight equipment package. FEATURES/COMPONENTS: Mirrors and graphics CEILING: No ceiling – an open ceiling/deck design is recommended.
L	Recovery – Physical Therapy or Other Modality (Optional)	LOCATION: Private room or Semi-Private area. SIZE: Minimum of 80 s.f., depending on modality selection. FEATURES/COMPONENTS: Equipment, Furniture and graphics CEILING: Private: Dry wall ceiling at 10'-0" min

	SPACE/AREA	DESCRIPTION
K	Toilet/Shower Room(s)	LOCATION: At the rear of your club, all doors screened from view. REQUIREMENTS: Toilet rooms and drinking fountains must be provided per plumbing code and ADA requirements. Clubs are required to provide single occupancy rooms as-follows: • (2) Toilet rooms with showers. • (1) Toilet room without a shower. • Additional toilets may be required by local codes. Have your architect of record verify the specific requirements for your club. • Doors for toilet and toilet/shower rooms must be screened from the main club. • Walls to extend to underside of roof deck or a 12'-0" min. • These are designed for single-use only and must not be set up for shared use in any way. Locker room-style bathrooms or multiple toilet bathrooms are <u>NOT</u> allowed. SIZE (TOILET/SHOWER ROOM): Sized to fit all necessary components below; greater than or equal to the minimum required by local codes or ADA requirements. COMPONENTS: Toilet Room: One toilet, one sink, mirror, and door closure with lockable latch set from the interior of the room. Toilet/Shower Room: One toilet, one sink, one shower, mirror, and door closure that is locked from the interior of the room. MATERIALS: Porcelain tile (refer to the DCP) is required for all toilet and toilet/shower room floors and walls. Fiberglass enclosures can be used in the shower, however, tile is recommended. Porcelain tile shower floor or shower pan must be slip resistant and sloped to the shower drain. Tempered glass shower door or a rod hung, high-quality shower curtain with a heavy vinyl liner, are both acceptable. CEILING: Ceilings are required in all toilet & toilet/showers. If the walls for each room extend to the deck a vinyl wrapped acoustical ceiling system can be used. If the walls stop short of the deck, a hard lid, gypsum board ceiling is required. Ceiling height is 9'-0" A.F.F..

Finishes & Materials

This section will provide a brief description of the finishes and materials that will be used throughout your club. Refer to your club specific Compliance Drawing (approved layout) and DCP to identify where the materials will be used in your club and for material specifications.

PAINT

This is the main wall finish throughout the club. The high-quality paint provides an affordable finish that brings life to the space through the use of color. There is a line of abuse-resistant paints available for high traffic areas. National account pricing makes the specified paint an exceptional value.

Paint must cure minimum 10 days with HVAC unit running prior to install any vinyl graphics to the wall. With HVAC unit not running, curing time for the paint is 15-20 days.

FLOORING – Refer to the “Non-Traditional Lease Space” section for additional requirements.

CARPET

Carpet tile is specified for aesthetics, recycled content, and reduced waste (when compared to broadloom) as well as ease of delivery, installation and replacement (when necessary). The carpet is loop weave, commercial grade and appropriately tough against the rigors of a health club. It comes with the manufacturer’s anti-microbial finish to inhibit growth of bacteria, reduce odors, and therefore extend the life of the carpet. When installed in accordance with manufacturer’s specifications, this product will provide many years use under cardio, strength, offices, and open floor areas. Your Compliance Drawing and DCP will provide complete details.

RUBBER FLOORING

This flooring is 100% recycled rubber and installed per manufacturer’s specifications for maximum durability and performance in the free weight area only.

ARTIFICIAL TURF

This is a durable product that can take a significant amount of abuse. The high quality top thread layer is easy to clean and adds to the support and cushion along with the rubber backing. For use in functional space only.

PORCELAIN TILE

This product has great durability, ease of maintenance and will likely last as long as the building. Proper installation per manufacturer’s specifications in addition to the use of industrial quality setting compounds and grouts are key. Using an epoxy grout is an investment and will stand the test of time and be resilient to stains and dirt. If epoxy is not in the budget for the whole job, it is highly recommended for showers and bathroom floors.

FLOORING (continued)

LUXURY VINYL TILE (LVT) FLOORING

This flooring is a cost-effective alternative to carpet and tile and is well-suited for use in offices, lobby areas, hallways, cardio areas and strength equipment areas. Install per manufacturer's specifications and ensure a moisture test is complete for concrete slabs to ensure LVT can be installed and/or if additional materials; e.g. moisture barrier. Vinyl flooring can NOT be used in restrooms.

STAINED CONCRETE

A concrete floor can be cleaned and stained to add additional character to the space. If the existing concrete has been previously sealed or stained, it's difficult to change. However, a new or unsealed slab can benefit from staining.

Stained concrete can be utilized in place of carpet and tile in the main areas of the club and lobbies if the floor slab is new or reconditioned. Stained concrete is not permitted in restrooms. Stained concrete works best in first generation, new construction spaces. **If there was a previous tenant in the space, you will need pre-approval from your CDM in order to do stained concrete.**

The staining process colors the top portion of the concrete with a transparent dye. If the concrete has been patched and/or repaired the dye will not match the original concrete floor area resulting in an inconsistent and unacceptable finish. Staining a concrete slab is a multi-step process to ensure proper performance and durability. This includes proper preparation, slab densification, staining and sealant. Ensure your contractor is knowledgeable and experienced with the product and process, follows the manufacturer's recommendations and requirements. Stained concrete must be sealed on a regular basis to avoid wear and increase the usable life of the floor. Epoxy coatings, floor paint and other finishes are **NOT** allowed.

Refer to DCP for required concrete stain specifications.

FLOORING (continued)

MOISTURE TESTING

To ensure full warranties of all flooring materials, moisture testing of concrete is required prior to installation of all flooring materials. All flooring materials will need 48-72 hours of acclimation to the space prior to installing.

Refer to Vendor contacts listed in the color scheme section with any questions.

Moisture in concrete is not new. However, due to the industry's recent turn to moisture impervious products, it has now become an issue with trapping this moisture beneath the flooring products. In the past products have been "breathable" which allowed this moisture to escape into the air. The trapped moisture causes the adhesives to break down. There are two different ways to test for moisture vapor in concrete per the ASTM 2170 standard.

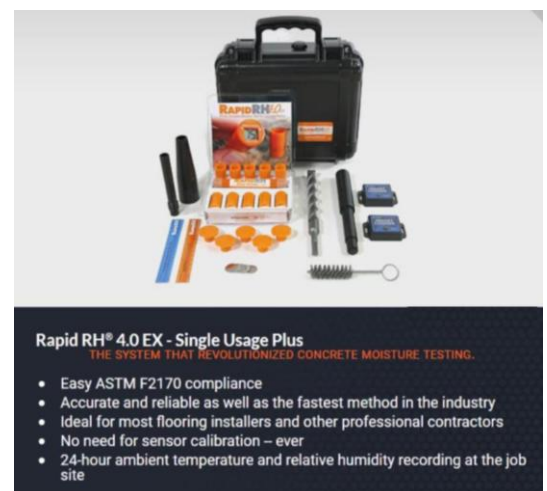
1. rH testing(Relative Humidity)

This test is done by drilling a hole into the concrete and inserting a probe into the concrete. After the designated time(usually 24-72 hours) you go back with a reader and check the rH levels at each probe. The probes will stay in the concrete and can be read for the life of the building. You would simply need the reader to go back and check for moisture in the future.

2. Calcium Chloride test.

This test is a specific kit made of calcium chloride pellets that are to be installed under a hood and kept free from being removed for 72hrs. Once the test is completed the pellets are weighed and noted. The pellets have taken on the moisture emitting from the concrete causing them to increase in weight. A specific formula will give you a reading.

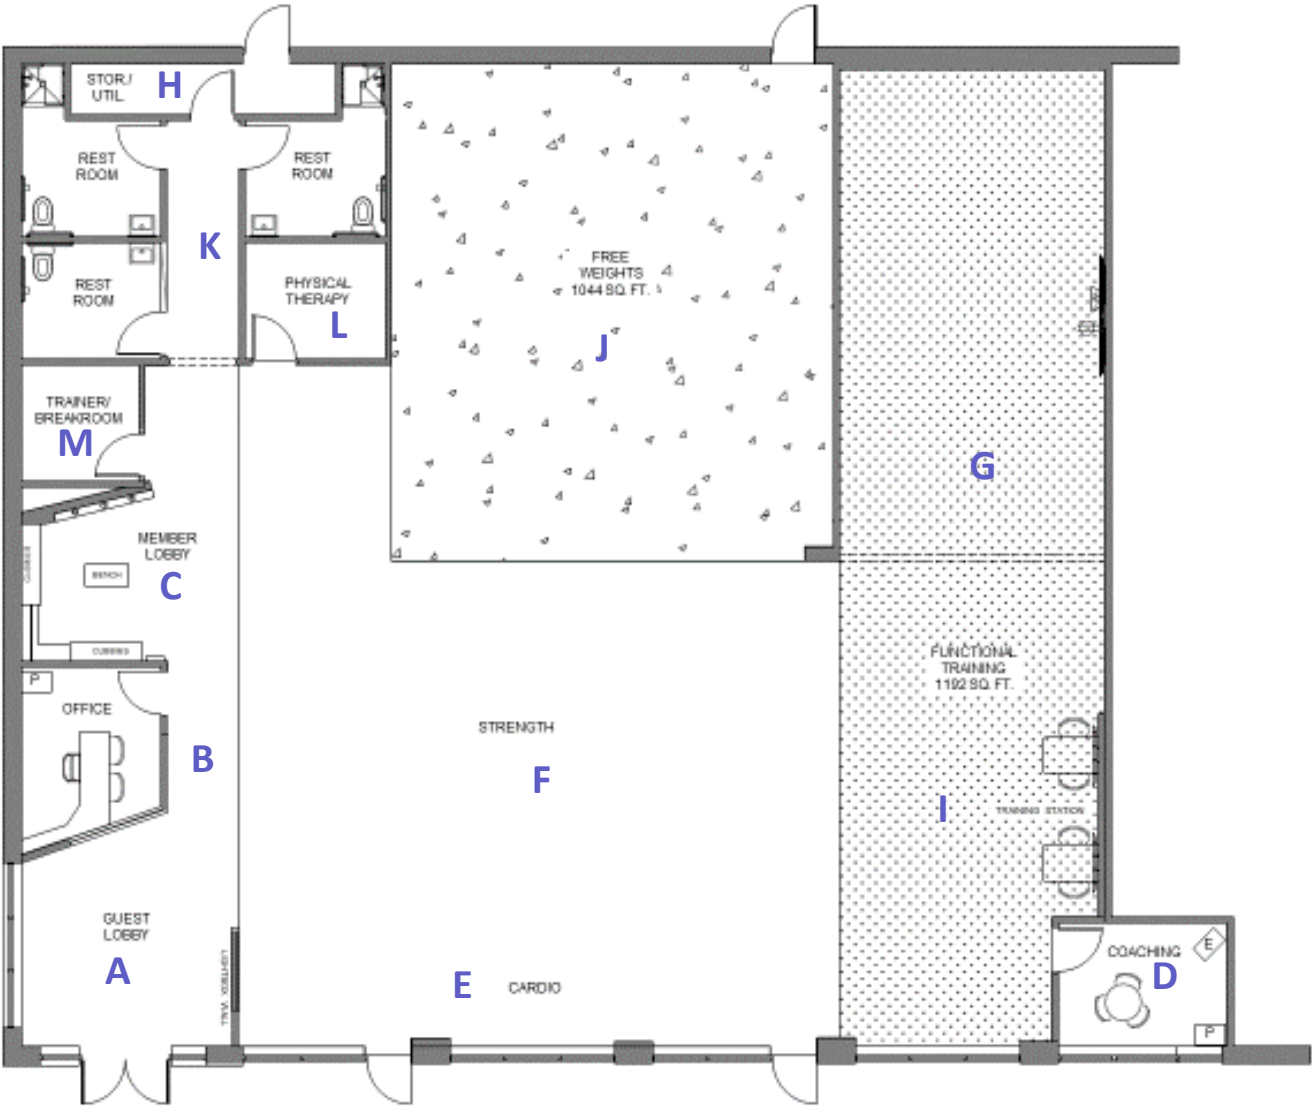
- Both of these test should consist of 3 test for the first 1000 sq. ft. and an add another test for each additional 1000 sq. ft. thereafter. This will ensure complete coverage over the entire area to be installed.
- Most manufactures will accept the test results form both of these testing methods. Confirm with the flooring manufacture prior to testing.
- The rH method is the preferred method in the industry.
- A recommend testing kit for rH is the Wagner rH testing kit.



The configuration of your club may vary greatly from what is shown. This sample plan and the corresponding description of each item on the pages that follow will identify the material and finish options for each area of the club. Refer to your club specific Compliance Drawing (approved layout) and DCP to identify where the materials will be used in your club and for material specifications.

AREA/ FEATURE/ ELEMENT

- | | | | |
|---|---------------------|---|--|
| A | Guest Lobby | H | Utility Room |
| B | Office | I | Training Station |
| C | Member Lobby | J | Free Weights |
| D | Coaching Room | K | Restrooms / Showers |
| E | Cardio Area | L | Recovery – Physical Therapy or Other Modality (Optional) |
| F | Strength Training | M | Breakroom (Optional) |
| G | Functional Training | | |






FINISHES

	SPACE/ AREA	DESCRIPTION
A	Guest Lobby	WALL: Paint FLOORING: Porcelain Tile, LVT or Stained Concrete, Vinyl Base CEILING: Paint or Acoustical Ceiling Tiles MISC. N/A
B	Main Office	WALL: Paint FLOORING: Carpet, LVT or Stained Concrete, Vinyl Base CEILING: Acoustical Ceiling Tiles MISC. N/A
C	Member Lobby	WALL: Paint FLOORING: Porcelain Tile, LVT or Stained Concrete, Vinyl Base CEILING: Paint or Acoustical Ceiling Tiles MISC. N/A
D	Coaching Room	WALL: Paint FLOORING: Carpet, LVT or Stained Concrete, Vinyl Base CEILING: Acoustical Ceiling Tiles – Paint (semi-private open area) MISC. N/A
E	AF Training Station	WALL: Paint FLOORING: Carpet, LVT or Stained Concrete, Vinyl Base CEILING: Paint or Acoustical Ceiling Tiles MISC. N/A
F	Cardio Area	WALL: Paint FLOORING: Carpet, LVT or Stained Concrete, Vinyl Base CEILING: Paint or Acoustical Ceiling Tiles MISC. N/A
G	Strength Training	WALL: Paint FLOORING: Carpet, LVT or Stained Concrete, Vinyl Base CEILING: Paint or Acoustical Ceiling Tiles MISC. N/A

FINISHES

	SPACE/ AREA	DESCRIPTION
H	Functional Training	WALL: Paint FLOORING: Turf, Vinyl Base CEILING: Paint or Acoustical Ceiling Tiles MISC. N/A
I	Free Weight Area	WALL: Paint FLOORING: Rubber, Vinyl Base CEILING: Paint or Acoustical Ceiling Tiles MISC. N/A
J	Utility Room	WALL: Paint FLOORING LVT, Stained and/or Sealed Concrete, Vinyl Base CEILING: Paint or Acoustical Ceiling Tiles MISC. N/A
K	Toilet/Shower Room(s)	WALL: Porcelain Tile, Paint FLOORING: Porcelain Tile and Base CEILING: Paint MISC. N/A
L	Recovery – Physical Therapy or Other Modality (Optional)	WALL: Paint FLOORING: Carpet, LVT, Vinyl Base CEILING: Paint MISC. N/A

FINISHES

CARPET	MANUFACTURER: Patcraft MATERIAL: Custom – <i>RAF Design Carpet</i> PATTERN: Brick SUPPLIER: N/A	
LVT	MANUFACTURER: Portico MATERIAL: Natures View, Rustique, 18 x36 Color Titanium NVS3724 PATTERN: 50% offset, horizontal SUPPLIER: Portico	
STAINED CONCRETE	MANUFACTURER: Ameripolish MATERIAL: 3D HS Densifier Ameripolish SureLock Dye Color: Chocolate Brown Ameripolish 3D SP Stain Protector PATTERN: N/A SUPPLIER: Source locally	
Turf	MANUFACTURER: Ecore MATERIAL: Motivate Rolls – Purple Rage PATTERN: Rolls Turf is directional, rolls must be laid in the same direction refer to arrow on back SUPPLIER: Ecore	
Rubber	MANUFACTURER: Ecore MATERIAL: Everlast Roll EL09 Pumpin' Purple PATTERN: N/A - Rolls SUPPLIER: Ecore	
Wall Base	MANUFACTURER: Johnsonite MATERIAL: CE-40-C Black PATTERN: Coils stock, 4' Sections not permitted SUPPLIER: Source Locally	
Flooring Transition	MANUFACTURER: Johnsonite MATERIAL: Vinyl Insert CE-40-C, Black Track MTC-00-A PATTERN: Coils stock, 4' Sections not permitted SUPPLIER: Source Locally	 









FINISHES

All paint to be Sherwin Williams as specified below. Color match by alternate manufacturers is not allowed.

Anytime Fitness has established a National Account Program with Sherwin Williams. The program has 2 main benefits.

1. Discount on paint and supplies
2. Program data on color schemes and custom paint colors

National Accounts Number: 5753-1214-5

PAINT Wall	MANUFACTURER: Sherwin Williams MATERIAL: Paint Promar 200 – Eggshell Primer Zero VOC B28W2600			
	 SW 7662 Evening Shadow	 SW 9161 Dustblu	 SW 7076 Cyberspace	 SW CUSTOM New Anytime Purple
	 SW CUSTOM Anytime Orange	 SW 7649 Silverplate	 SW 9162 African Gray	 SW 7006 Extra White
	A minimum of one coat of tinted primer and two coats of eggshell finish paint is required.			
PAINT Ceiling	MANUFACTURER: Sherwin Williams MATERIAL: Paint Waterborne Acrylic Dryfall B42W0082 Color White			

FINISHES

TILE Main Club Restroom Floors	MANUFACTURER: Dal-Tile MATERIAL: Style Modern Formation 12 x 24 Color: MF05 Smokey Ridge - Matte PATTERN: Staggered 50% Offset Vertical 1/8" Joint SUPPLIER: Dal-Tile Corporation GROUT: Mapei Flexcolor Color = CQ #107 Iron	
TILE Shower Floors	MANUFACTURER: Dal-Tile MATERIAL: Style Modern Formation 2 x 2 Mosaic, 12 x 12 Sheets Color: MF05 Smokey Ridge - Matte PATTERN: Staggered 50% Vertical 1/8" Joint SUPPLIER: Dal-Tile Corporation GROUT: Mapei Flexcolor Color = CQ #107 Iron	
TILE Restroom Walls Shower Walls	MANUFACTURER: Dal-Tile MATERIAL: Color Story 8 x 24 Color: 0034 Matte Balance PATTERN: Staggered 1/3 Offset Horizontal 1/8" Joint SUPPLIER: Dal-Tile Corporation GROUT: Mapei Flexcolor Color = CQ #77 Frost	
TILE Restroom Base Shower Base	MANUFACTURER: Dal-Tile MATERIAL: Style Modern Formation 12 x 24 <u>CUT DOWN TO 6"</u> Color: MF05 Smokey Ridge - Matte PATTERN: 1/8" Joint SUPPLIER: Dal-Tile Corporation GROUT: Mapei Flexcolor Color = CQ #107 Iron	
Tile Trim & Transition	MANUFACTURER: Schluter MATERIAL: Wall Wainscot SCHIENE EDGE TRIM 3/8" AE100 Cove Base Transition DILEX-AHK 3/8" AHK1S100AE SUPPLIER: Schluter	
SHOWER THRESHOLD	MANUFACTURER: Global Retail Environments MATERIAL: Solid Surface— Custom SUPPLIER: Global Retail Environments	

Ceilings and Soffits

There are a variety of acceptable ceiling & soffit design options. Existing conditions, functionality, cost and personal preference are all factors for consideration.

MAIN CLUB AREA

An open ceiling design creates a more open inspirational environment and is strongly recommended. This design requires that all exposed elements (structural members, decking, pipes, spiral ductwork, conduit, etc.) be painted white as defined in this manual. Care must be taken to conceal wires and cabling if they are not installed in conduit. The open ceiling design can be enhanced by providing partial ceilings and soffits in select areas. Refer to the sections below for more detail.

If an acoustical ceiling is utilized in the main area of the club, it should be installed as high as possible to create an open feel.



The minimum allowable ceiling height for the main club area is 10'-0".
Under no circumstance will any ceiling height of less than 10'-0" be permitted.

PARTIAL ACOUSTIC CEILING (optional)

DESCRIPTION:

2' x 2' white acoustical ceiling systems with premanufactured edge trim installed in select areas. This will help with reducing the volume/space of select areas that benefit from a lower ceiling, such as hallways. The height of the ceiling is typically 10'-0" but may need to be raised to accommodate window heights. Exact specification for the ceiling and edge trim can be found in the "Finishes & Materials" section.

TOILET AND SHOWER ROOMS

Ceilings are required. If the walls for each room extend to the deck, a vinyl wrapped acoustical ceiling system can be used. If the walls stop short of the roof deck, a hard lid gypsum ceiling is required.

CEILINGS & SOFFITS

CEILING PAINT

Using white paint for the exposed ceiling structure, is required, also known as an open ceiling design, is a great way to create an expansive and airy feel inside your club.

ACOUSTIC CEILING TILE (ACT)

ACT is a cost-effective system widely used in our industry. ACT is often installed to reduce the volume of a space by lowering the ceiling, reducing noise, and hiding aesthetics (duct-work, pipes, etc.). These products are frequently used in offices and hallways.

ITEM	SPECIFICATION	NOTES
Ceiling Tile	USG ECLIPSE CLIMAPLUS SQ (White) 76575 2'x2'x3/4"	If ceiling tile is used in restroom alternate specification is required
Suspension System	USG DX / DXL 24 (White)	
Ceiling System Edge Trim	USG Compasso 12" Trim Elite (Flat White)	

LIGHTING

The Lighting of your club should include practical, general lighting with a few highlighted elements. Many spaces will already be equipped with general lighting, but keep in mind that your layout may require some alterations. To ensure that all spaces are receiving the appropriate amount of lighting, some relocated and/or supplemental lighting may be necessary. Decorative fixtures are used to punctuate certain architectural elements of your club.

Preferred Vendor: Specialty Lighting Group (refer to DCP Vendor Schedule for contact info)

GENERAL CLUB LIGHTING

- Provide LED linear fixtures, evenly spaced, in area without ceilings. High bay style light fixtures should **NOT** be used unless the ceiling height is the appropriate height (typically 30+ feet) and have the appropriate diffusers.
- Provide 2' x 2' LED lay-in fixtures, evenly spaced, in areas with acoustic ceilings
- Verify that proper light levels are met
 - Your electrician must provide or maintain a consistent lighting level of 50 to 60 foot-candles at workout and office areas.
- For clubs reusing existing lighting:
 - Remove or relocate any fixtures (as needed) to provide proper light levels to new or reconfigured rooms or spaces
 - Replace existing bulbs with “cool white” bulbs for consistency in light level and quality
 - Encouraged to explore LED change over options from existing lighting. Check with your local energy company for possible rebates.

TOILET/SHOWER ROOM LIGHTING

- Install one to two recessed lights into ceiling
- Install wall sconces on either side of mirrors, if desired
- Install waterproof light fixture in the shower

UTILITY ROOM LIGHTING

- Install one surface mounted light onto ceiling

LIGHTING

ENVIRONMENTALLY FRIENDLY INFORMATION

LED LIGHTING

LED (Light Emitting Diodes) has become the industry standard and should be used throughout your club..

LED Features and Benefits:

- Saves Energy; LED lights use 50-90% less power than traditional lighting
- Saves money; lowers energy bills
- Saves the environment; less waste and disposal hazards
- Extremely long life lasts 4-5 times longer than traditional lighting.
- Reduced maintenance costs; Replacement cycle costs are drastically reduced.
- Reduces ambient heat; generates far less heat than traditional lighting allowing greater savings on air conditioning costs.
- Produces less glare; higher productivity and safety in the work place.
- Better directional lighting; directionality allows for precision lighting with no wasted light.
- Less pollution: No toxic chemicals like that found in traditional incandescent, fluorescent and HID lighting like- arsenic, mercury, lead, carbon dioxide or phosphorous.
- No UV radiation produces no ultra violet or infrared light.
- LED's are also recyclable and considered "green" or Earth-Friendly.
- Possible rebates from your local energy company

Motion detection lighting can reduce operating costs in some rooms, such as the restrooms. Motion sensor lighting is **NOT** allowed in general areas.

Non-Traditional Lease Spaces

The most common/traditional type of shell construction is a single building with a concrete floor slab on grade. Additional consideration needs be given to Non-Traditional Lease spaces that vary in type of construction, including but not limited to.

Categories:

- A. Spaces with Basements
- B. Spaces on a 2nd floor
- C. Spaces located in a structure with multiple floors
- D. Spaces with sound sensitive co-tenants; e.g. residential

The sections below will provide requirements and/ or areas of concern.

- Floor Systems
- Saw Cutting & Core Drilling
- Equipment
- Tile Membrane
- Floor Underlayment

FLOOR SYSTEMS

Spaces in categories “A”-“C” need to address the structural capabilities of the floor system. Based on an “Assembly Use” the floor system should have a minimum design live load of 125 pounds per square foot with additional consideration load from weights and equipment. It is recommended that a Structural Engineer is engaged to evaluate each floor system.

SAW CUTTING & CORE DRILLING

Additional precautions should to be taken when modifying the floor system for spaces located in categories “A” – “C”. Floor systems that are not located directly on the ground are typically designed with additional structural supports/reinforcing within the floor that are undetectable to the naked eye. If the structure/reinforcing is cut or altered, it can void the structural integrity of the entire building. Additional measures such as X-raying the floor may be necessary. Ensure the design professional and contractors involved with your club have done the necessary due diligence and taken the appropriate measures.

EQUIPMENT

Noise reduction platforms should be used in the Free Weight Area in spaces that fall into categories “A”-“D” to reduce noise for actives such as dead lifts. Refer to the portal for APPROVED/AUTHORIZED options.

FLOOR UNDERLAYMENT

TILE MEMBRANE

A membrane is required under the floor tile in the restroom/shower rooms of the club, for any space in category “A” or “B”. The membrane helps prevent leaking. There are many products on the market to choose from, including trowel on and membrane products. Some products require a specific floor drain to ensure a water tight seal. Here are a few recommended products.

- **Strataflex Waterproofing Membrane**

- Strataflex is a high strength, self-bonding, elastomeric sheet applied membrane and is designed for use under floor surfaces that require protection from water penetration.

- **REDGARD Waterproofing Membrane**

- An elastomeric waterproofing membrane for both commercial tile and stone application. Can be used as a slab-on-grade moisture vapor barrier under all types of floor coverings.

FLOOR UNDERLAYMENT (Continued)

SOUND REDUCTION MAT – To be used under Ecore Rubber in Free Weight Area

	MANUFACTURER	COLOR/ NUMBER	STYLE	SAMPLE
SRM-1	Ecore	4735 – 12mm	Rubber	
Designated Vendor: Ecore International, Inc. Direct Line: 515-450-2144 matt.koch@ecoreintl.com				

WHEELED TRAFFIC TRANISTION – Use where Ecore 4735 meets concrete

	MANUFACTURER	COLOR/ NUMBER	STYLE	SAMPLE
WTT-1	Johnsonite	CT-40-PL Black	½" Material to subfloor,	
Designated Vendor: Ecore International, Inc. Direct Line: 515-450-2144 matt.koch@ecoreintl.com				

RUBBER RAMP UP – To be used under flooring materials to create a flush transition

	MANUFACTURER	COLOR/ NUMBER	STYLE	SAMPLE
RP-1 RP-2	Johnsonite Johnsonite	LS-40 (use w/Carpet) LS-40-F (use w/ Turf)	Reduces ¼" to 0" Reduces 1/8" to 0"	
Designated Vendor: Shaw Integrated Solutions (S.I.S.) Customer Service: 800-338-9479 anytime.fitness@shawinc.com				

VINYL FLOORING TRANISTION STRIP – To be used between all flooring material changes

	MANUFACTURER	COLOR/ NUMBER	STYLE	SAMPLE
TS-1	Johnsonite	CE-40-C Black	12' "T" Molding Transition 12' Flex Track – MTC-00-A	
Designated Vendor: Shaw Integrated Solutions (S.I.S.) Customer Service: 800-338-9479 anytime.fitness@shawinc.com				

WINDOWS

Windows are a great attribute for any club. They add to the open spacious feeling and enhance the member experience; however, they can present challenges. Heat gain, blinding light, and privacy concerns may arise in some situations. The good news is that each challenge has a very specific solution that will preserve the benefits of your club's windows.

Heat Gain & Blinding Light

Fortunately, these are temporary problems that can be easily managed. In most cases, these problems occur for a limited period of time during the day and can even be seasonal. Window shades are a great solution to address the variability of the problem. Shades can be lowered and raised to address the problem as it occurs. Whereas materials such as glass tinting and graphics are permanent. They work well during excessive sunlight hours but are over kill and unnecessary the majority of the time. This is especially important at night when the light through the windows helps to communicate our ALWAYS OPEN - 24/7 access. We have partnered with a national vendor to provide a high quality, commercial grade shade for our franchisees at an affordable price.

- NOTE: Main offices with exterior windows should have blinds to ensure people cannot view the security monitors after hours.

Privacy

There are times when member and staff privacy is a concern, such as on busy urban streets. In these cases, a commercial dusted vinyl is the best solution. This product creates the illusion of frosted glass which obscures the view while still allowing in natural light. The vinyl should only be installed as necessary to obscure the view into the club. The dusted vinyl should not include any wordmark, logos, or Runningman graphics. Limit the height to 6' or 8' or use a horizontal mullion as the stop point. Ensure there is an issue with privacy before installing dusted vinyl. Most of our clubs are in a retail shopping centers and rarely have an issue with privacy.

NOT PERMITTED: Permanent Advertising Graphics

- The view into a well-maintained club is the best advertising opportunity for any nearby pedestrian or vehicle traffic. Covering windows with messaging and graphics only takes away from that benefit, while reducing natural light and limiting the view for your members in the club. For those reasons, we do not allow any permanent graphics, messaging or advertising to be installed on any windows.
 - NOTE: We do allow for temporary promotional window graphics, which are not intended to cover entire windows and are to be used for sales, new offerings, etc. Approved options can be found in the Brand Marketing Center.

WINDOW SHADES

Specifications:

- Material: Material to be 4000 Granite 5% density.
- Internal Hembar: Fabric wrapped bottom weight bar.
- Control System: Adjustment free system shall be provided by stainless steel chain inside the clutch system.
- All components that do not have bronze mullion: Clutch, brackets, child safety tension device all to be grey.
- All components with a bronze mullion: Bronze child safety tension device; clutch and brackets to be black.
- Branding of window shades is **NOT** allowed.

Preferred Vendor: Refer to Vendor Schedule in Design Compliance Packet (DCP)

The material specified was selected to allow some light to enter while blocking the excess majority. In extreme cases a heavier/darker weave may be required. The vendor representative can assist with the alternate materials in those rare cases.

DUSTED VINYL

Specifications:

The vinyl should be installed on the interior of the window – second surface.

FRAMES & HARDWARE

The materials used to finish your doors and windows vary greatly depending on the construction; – where they are located and how they are used. The selected finishes take into account aesthetics as well as durability and maintenance.

- Exterior storefront doors and windows are to match the existing and/or the remainder of the building. In the event of new construction, a clear anodized aluminum system is preferred.
- The interior surface of hollow metal exterior emergency exit doors and frames should be painted to match the adjacent wall.
- Interior doors are to be flat/smooth solid core wood with a maple veneer, finished with a clear sealant.
 - Raised panel or hollow-core doors are **NOT** allowed.
 - Office and Coaching Room doors to include full height glass window
- Frames are to be hollow metal – preferably welded – knock down metal frames are allowed
 - Wood frames are **NOT** allowed.
- Frame to be painted with a spray application and painted to match the adjacent wall
 - Brush and roller application are **NOT** allowed.

FRAMES & HARDWARE

Lockable latch set to be Schlage ND73PD, with the following functions:

- When Locked by key, outside lever can only be unlocked by key. NO pin hole keys allowed
- Inside lever is always unlocked
- Push-button locking from inside
- Turn inside lever or close door to release button

HARDWARE GROUPS

GROUP #1

- BUTT HINGES
- 180 DEGREE HINGE ON SINGLE LEAF
- DESIGN HARDWARE Z-SD SINGLE DUMMY
- IVES RL32 ROLLER LATCH
- WALL MOUNT DOOR STOP HOLD OPEN
- DELTANA SOLID BRASS MAGNETIC
- DOOR STOP
- HOLDER EACH DOOR

GROUP #2

- BUTT HINGES
- WALL STOP
- CLOSER
- MORTISE LOCK WITH OCCUPANCY SENSOR
- KICKPLATE
- DOUBLE ROBE HOOK

GROUP #3

- BUTT HINGES
- WALL STOP
- OFFICE LOCKSET
- KICKPLATE
- DOUBLE ROBE HOOK

GROUP #4

- BUTT HINGES
- WALL STOP
- STORAGE LOCKSET
- KICKPLATE
- KICK DOWN HOLD OPEN

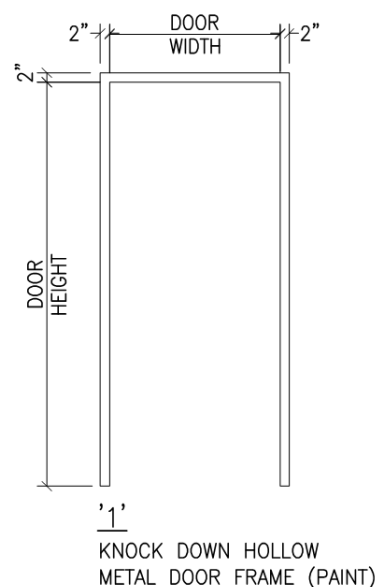
GROUP #5

- 1 1/2 BUTT HINGES
- PANIC PUSH BAR
- SURFACE CLOSER
- THRESHOLD
- WEATHERSTRIPPING
- HEAD FLASHING
- CONNECT TO SECURITY EQUIPMENT

GROUP #6

- PANIC HARDWARE - ELECTRIC STRIKE WITH REGULAR PANIC
- PROVIDE NEW IF NOT EXISTING -G.C. TO PURCHASE THROUGH TWIN CITY HARDWARE (PREFERRED VENDOR) OR APPROVED EQUAL
- PULLS - PROVIDE IF NOT EXISTING

FRAME TYPES



ACCESSORIES

TOILET/SHOWER ROOMS

- Provide shelf in showers for toiletries.
- Provide and install a mirror above the sink and be sure the height meets local building codes for handicap accessible toilet/shower room(s).
- Provide and install a towel bar or hook outside shower stall.
- Provide and install hook(s) behind door, if desired.
- Provide and install door closures.
- Provide a bench or chair, if desired, and be sure they do not block the clear area required in handicap accessible toilet/shower room(s). (Source Locally)
- Provide and install a full-length mirror, if desired. (Source Locally)

Preferred Vendor: Refer to Vendor Schedule in Design Compliance Packet

TANNING ROOMS (If applicable/approved)

- Provide and install a paper towel dispenser, as customers will be required to clean the tanning bed before and after each use.
- Provide and install a shelf or provide a table large enough for a spray bottle of cleaner/disinfectant for use in cleaning the bed.
- Provide and install a full-length mirror, if desired.
- Provide and install hook(s) behind door, if desired.
- Provide a chair or bench, if desired.
- Provide a fan if desired.

VENDING MACHINE (if applicable)

- One vending machine that sells bottled items is recommended in or near the member lobby.
- Vending machines should not be visible from the main entrance/guest lobby.
- Contact your local Pepsi or Coke distributor, they will likely install a machine at no cost to you, and keep it stocked.
- Required a standard 110V Outlet.

SEE "BUILDING SYSTEMS" FOR POWER REQUIREMENTS

ACCESSORIES

HAND DRYERS (recommended)

- One hand dryer for each restroom.
- Stainless steel recess kit is required to meet ADA code.

Preferred Vendor: Refer to Vendor Portal

WORKOUT FLOOR WIPES (recommended)

- Provide a minimum of two “gym wipes” dispensers.
 - If you select the wall-mount style, one dispenser should be mounted with bottom of dispenser no higher than 48” from the floor.
- Provide one “Simplehuman” trash can below or next to each “gym wipes” station.
 - Simplehuman Smartbucket 40-Liter semi-round step-on trash can available at Bed, Bath & Beyond.

Preferred Vendor: Refer to Vendor Portal

AIR FRAGRANCE SYSTEM

Be sure your club maintains a clean, fresh smell at all times. Current and potential members **MUST** be provided an environment that is pleasing to all senses.

- Provide staff with a method of deodorizing the workout areas of the club at regular intervals.
- Provide each toilet and tanning room with air freshener (automatic or manual).

Preferred Vendor: Refer to Vendor Portal

ACCESSORIES

WALL PROTECTION

Wall protection is required for all new clubs and highly recommended in existing clubs, located in the free weight area only. There are two levels of potential damage and protection options.

Minimal Damage / Light Protection: This is damage to the painted surface that doesn't extend into the sheetrock; i.e. scuffs. etc. The protection options are abuse resistant paints. There are two levels of paint protection listed in the paint specifications section of the DCP. Areas that typically benefit from light protection are hallways and functional training areas.

Heavy Abuse / High Protection: This is the damage that penetrates the sheetrock. Areas that typically benefit from high protection are the free weight areas. Refer to the DCP for the specification for the high protection option.

Note: Maple wall paneling and diamond plate wall protection should **NOT** be used in new clubs with the Real AF design scheme.

MIRRORS

Mirrors are required on two walls in the free weight area and a minimum of one wall in the multi-purpose room (if applicable).

- Mirrors are 6' H, installed 2' above the finished floor with the top at 8'-0" AFF.
- Mirrors to run from corner to corner on each wall.
- All wall mirrors must have "J" channel on top and bottom.
- "J" channel to be used when a vertical end is not in a corner and exposed.
- Wall protection is strongly recommended below mirrors in the free weight area, refer to DCP for product specifications.

The following information provides minimum guidelines for your mechanical, electrical, and plumbing systems of your club. All clubs are slightly different, so verify your specific needs with your general contractor and building official PRIOR to design and construction.

MECHANICAL

GENERAL HVAC

- System Recommendation Minimum: 1 ton per 350 sq.ft. (or as required by code). Your mechanical engineer will determine the final requirements based industry design parameters. All visible ductwork in an open exposed ceiling **MUST** be spiral duct work.

CEILING FAN(S)

- Provides circulation and cooling for the workout areas.
- Standard 52" commercial grade ceiling fans are recommended.
 - Color: White
 - An average 5,000 sq. ft. club would typically use 6-8 52" fans.
 - Big Ass Fans are no longer permitted due to power demand needs and the need to hire a structural engineer to help re-enforce and support the fans

Preferred Vendor: Refer to Vendor Schedule in Design Compliance Packet (DCP)

ELECTRICAL

SERVICE

- 400 AMP, 120/208V, 3-Phase, 4 Wire.

GENERAL

- Electrical outlets should be installed every 10 feet at standard height along all walls, or as dictated by your local electrical code.
- Provide outlets in the ceiling for televisions. Each TV will require 2 outlets – one for the TV and one for the receiver.
 - Outlet locations will be based on the final cardio equipment layout.
 - Coordinate with data requirements.
 - **NO exposed conduit is allowed.**
- Provide power for ceiling fan(s).
 - Coordinate with mechanical.
- Provide dedicated outlets for cardio equipment (i.e. treadmills), if indicated.
 - Each piece of equipment will require its own 110V, 20 AMP circuit.
 - Specify the outlets as separate 110V circuits and coordinate with your general contractor.
 - Verify power requirements with the equipment vendor.
 - Coordinate with data requirements.
 - Power Supply Options:
 1. Run the power in the floor by trenching through existing concrete slab (recommended).
 2. Low profile, metal raceway. (Legrand AL5200 Multi-Channel)
 3. Run the wiring down a load-bearing column, wires and conduit to be concealed.
- Provide additional outlets if you have LCD screens on your cardio equipment.
 - Verify power requirements with the equipment vendor.
 - Coordinate with data requirements.

MEMBER LOBBY

- Provide one duplex 110V outlet above member entrance door(s).
 - This outlet will be used by the electronic door strike and the access control system.
 - Coordinate with security requirements.
- Provide a dedicated outlet for vending machine(s), if desired, based on the specific power requirements.
 - Refer to section 4 for equipment information.

ELECTRICAL

MAIN OFFICE

- Provide one dedicated duplex outlet for the main computer, installed at standard height, within 3' of final placement of computer.
 - Coordinate with data requirements.
- Provide one dedicated duplex outlet for the electronic door strike and access control system within 3' of the final placement of the DVR, security panel, sound amplifier/receiver, and CCTV power supply.
 - If the security panel and/or CCTV power supply are installed above the ceiling, provide an additional 110V duplex outlet.
 - Verify that this is allowed by your local electric code.
 - Coordinate with security requirements.
- Provide additional outlets near phone jacks for use with electronics.
 - Coordinate with data requirements.
 - No exposed conduit allowed.

COACHING ROOM

- Provide a minimum of two 110V outlets or what is required per electrical code (whichever is greater).

TANNING ROOM(S) (if applicable/approved)

- Provide one dedicated outlet for the tanning bed.
- Verify specific voltage, amperage, and outlet type with tanning bed vendor.
- Provide additional outlets for a fan and/or a radio, if desired.

TOILET/SHOWER ROOM

- Provide one GFCI 110V outlet above sink, next to the mirror for razors, hair dryers, etc.

UTILITY ROOM

- Provide a minimum of one 110V outlet or what is required per electrical code (whichever is greater).

CABLE TELEVISION & INTERNET

General

- Cable outlets to be installed as required for cardio equipment and wall-mounted TV locations.
- Internet connections to be installed as required at offices and security system locations.

ELECTRICAL

Cardio

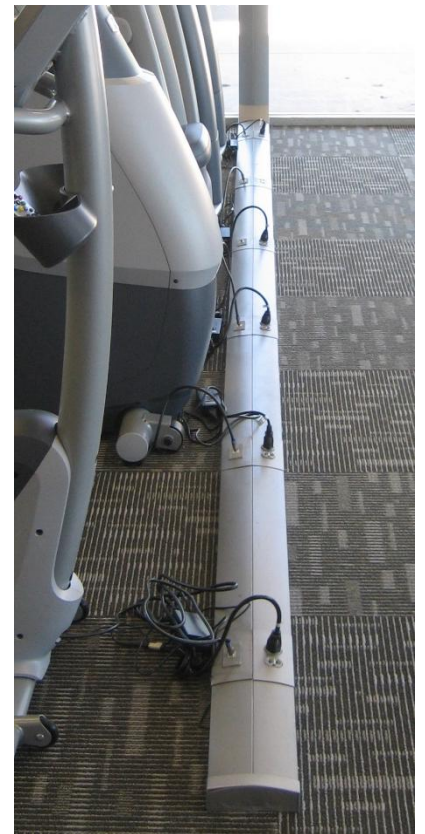
- **Single Row of Cardio**
 - Use a surface mounted raceway – Legrand AL5200 Raceway
 - Located along the storefront mullion
 - Brushed Aluminum
- **Second Row of Cardio**
 - Power to be fed inside wall, down to the floor.
- **Surface mounted conduit on the wall is NOT allowed.**
 - In-Floor Electrical Box– Walker RFB4-CI-1 Floor box
 - OR
 - Surface mounted raceway – Legrand ALDS4000 Series Raceway
 - Lower profile, radius edge
 - Brushed Aluminum
 - Provides clean, slim look
 - Need to minimize possible trip hazards
- **Knee walls are NOT allowed, they provide unwanted barriers in the club**



Surface Mounted Raceway – Single Row



In-floor Electrical Box – Second Row



Surface Mounted Raceway – Second Row

PLUMBING

TOILET/SHOWER ROOM(S)

- Provide a drain in all showers.
 - Slope shower floor/pan from shower walls and entrance lip to drain location.
 - If the shower has no entrance lip (due to ADA requirements), slope from edge of shower floor/pan.
- Provide an additional drain in the toilet/shower room floor to prevent flooding of the toilet room floor.

UTILITY ROOM

Average water consumption for a 4,000 sq.ft. club is 350 gallons per-day, or 10,500 gallons a month, depending on quantity of showers. Recommended options for water heaters (based on average water usage) is as follows:

1. Install a tank-style water heater, 50 gallons, recommended for two toilet rooms with a shower.
2. Install a 80 gallons size for three or more toilet rooms with showers.
 - For higher usage, adjust accordingly.

OR

3. Install one tankless, on-demand water heater providing up to 4.5 gallons per-minute (GPM) for one toilet room with a shower.
 - For two or more toilet rooms with showers, increase GPM to 5.3 (or higher).
4. Install two tankless, on-demand water heaters if you anticipate a high percentage of members that will use the showers.

AND

5. Provide and install one mop sink.

DRINKING FOUNTAIN

- Provide as-shown on Compliance Drawing (or as required by code).
- At least one drinking fountain is required. Refer to compliance drawing for location. Additional drinking fountains may be required by the governing authorities. Verify with your local design professional and local governing jurisdiction.
- Drinking fountains with the bottle filler feature is recommended.

Preferred Vendor: Refer to Vendor Portal



INFORMATION TECHNOLOGY

PHONES

The following phone lines are **REQUIRED** for your club. Additional lines may be added in the office(s), if desired.

- Line 1 for your main office phone.
- Line 2 for your fax and credit card terminal (DSL if applicable).
- Line 3 (analog) for your 911 emergency phone (configured for local calls only).
 - Your emergency phone line must be installed in plain view of the workout areas.
 - Mount the jack at 46" AFF and provide a wall-mounted phone and "911 Call Access" sign directly above the phone.

DATA/INTERNET ACCESS

- Broadband access (DSL, cable, etc.) with a static IP address is REQUIRED for your club. The static IP address (one that does not change) is required for remote computer support and remote viewing of the CCTV system through the DVR.
- Most Internet Service Providers (ISP) that provide broadband access also provide a modem with their service.
- Ask your ISP for the user name and password to access the router, as we will need to port forward to the DVR & security for remote access.
- A router or switch is required. We recommend that the Security provider include this switch in their equipment quote to eliminate compatibility issues and maximize remote support.
- A router allows multiple PCs, and other devices, such as the DVR & security, to access the internet simultaneously. It also provides a firewall to protect the local network from malicious attacks. We recommend that the Security provider include this router in their equipment quote to eliminate compatibility issues and maximize remote support.
- Order your internet service at least 60 days prior to your tentative opening date.

CABLE

- Programming source (cable, satellite, etc.) is necessary for TVs and LCD screens (on cardio equipment) in the cardio area.
 - NO EXPOSED CABLES ALLOWED for TV's and LCD Screens

Main Office:

- Install phone jacks for required phone lines 1 & 2, and additional jacks for computer(s), as-necessary.
 - Coordinate with Security and Electrical (based on computer location(s)).
- Provide Broadband for high-speed Internet access.
 - Coordinate with Security and Electrical (based on computer location(s)).

INFORMATION TECHNOLOGY

CABLE (continued)

Cardio Area:

- Provide cable connections to all TVs.
- Provide cable connections to all equipment mounted LCD screens.

TV's

- **General Club TV**
 - Typically size range is 50" to 55".
 - Brand is not important.
 - Buy base model
 - No need for HD, unless paying for HD service with your provider.
- **AF Training TV's**
 - Commercial grade 55"
 - Refer to Design Compliance Packet (DCP) for additional information

TV CEILING MOUNT

- Install unistrut's for support where the trusses are made out of metal.
- Typically attach at the bottom of the metal truss and span across two trusses, with the opening facing the floor.
- Specifications: 1 5/8" x 1 5/8", 12 gauge, with a minimum of two points of contact required.
- Verify manufacture, landlord and local code requirements prior to installation.
- Supplied by the Owner or General Contractor.

TV WALL MOUNT

- Install an external support to span between metal or wood studs to be hidden behind the TV
- Designed for use on 25 gauge or heavier metal studs to safely span the load between two studs (applies to 16", 20", or 24" centers).
- Verify gauge and spacing of existing or new studs with contractor.
 - Typical commercial buildings use heavier gauge studs for the perimeter (outside) walls and thinner gauge for internal walls.

SECURITY

Before ProVision Security Solutions (PSS) can begin the installation process, certain aspects of your build-out must be complete. The following information outlines these requirements. Please review these with your contractor and/or other vendors. For detailed questions about the additional requirements, please contact ProVision. Refer to Vendor Schedule in Design Compliance Packet (DCP) for contact information.

DOOR LOCK

For this component, you should contact a local, and trusted, locksmith. Your builder may have a preferred vendor for this type of work. It's best to contact the locksmith early in the build-out; doing so will allow any special order items to arrive on time. The recommended door latch is a normally secure electronic door strike. PSS strongly encourages the installation of the electronic door strike, rather than a magnetic lock. Your member entrance will control member access while allowing free exiting of members. Typically your existing doors will work, however they may need to be retro-fitted with an electronic release mechanism. It is also required that your member door(s) swing outward. If your door does not currently swing outward, adjustments will need to be made prior to the security installation. There are many different types of entrances so the best way to determine what your particular entrance will require is to meet with a local locksmith. A ProVision installer will connect the access control wiring to the electronic device the locksmith will install. The information below will help your locksmith understand the requirements for this installation.

DOOR LOCK REQUIREMENTS

Before a Technician can arrive at the club, you must provide your Provision Project Manager with adequate pictures showing the door lock complete.

The three main scenarios we see in Anytime Fitness gyms and their typical solutions are as follows:

Door Type	Recommended Door Lock System
Single Door	Electric Strike
Double Door With permanent mullion	Electric Strike
Double Door without permanent mullion (doors close together with no center rail)	Removable Mullion System

Electric Strike: An electronic strike will be cut into the door frame, a free exiting device with a spring latch is installed (i.e. crash bar or crash paddle), and a latch guard is installed on the exterior of the door to prevent tampering with the strike and latch. Anytime Fitness recommends the installation of a door latch guard to protect a strike from being damaged from the outside.

Locksmith requirements for electric strike:

- The strike will need to operate off 12 VDC.
- The locksmith will need to provide a 12 VDC rated lock power supply or plug-in transformer.
- Provide and install armored loop, if needed.
- Install the control cable from the strike to the duplex outlet above the door and test lock.

SECURITY

REMOVABLE MULLION SYSTEM

The removable mullion is installed (center rail installed from floor to top rail of the door frame on the interior of the space, the doors close up to the rail, this rail does not physically go between the doors), doors are fitted with crash bars that close to the center mullion, and an armored loop or power transfer hinge is installed to allow control wire to transfer from door to frame. A latch guard will not be necessary in this scenario as all locking components are internal and protected from tampering.

Locksmith requirements for removable mullion:

- Operates at 12 VDC.
- The locksmith will need to provide a 12 VDC plug-in transformer.
- Fail secure.
- Free exiting devices: one powered crash bar & one standard crash bar with dogging .
- Provide and install armored loop, if needed.
- Control wire run from powered crash bar through power transfer hinge or armored loop with enough wire to reach the outlet above the door.
- TEST SYSTEM.

MAG LOCK

It is not recommended by PSS, but if a magnetic lock is required, then an override key needs to be installed on the exterior of the door. This allows entry to the club when the access control program is not available or provides an additional keyed entrance, if necessary.

Locksmith Requirements for Mag Lock:

- Operates at 12 or 24 volts DC.
- Minimum of 6 hours of battery backup.
- key override on the exterior of the door, 12 or 24 volts DC.
- 2 free exit devices (RTE button is required).

ELECTRICAL OUTLETS - Requirements:

- Permanent power is required PRIOR to installation One double duplex 110V outlet above each member entrance door.
- This outlet will be used by the electronic door strike and the access control system
- One double duplex 110V outlet behind each tanning bed.
 - Please confirm with your tanning bed manufacturer, if applicable, the outlet specifications required to operate your tanning beds.
- One double duplex outlet in the office, near the computer desk.
 - The outlet must be within 3 feet of the final placement of the desk that will hold the club's main computer, and it should be installed at standard outlet height.
- Dedicated 15 amp circuit with double duplex outlet installed within 5' of the rack system at standard outlet height.
- One double duplex 110V outlet near final placement of the security panel (behind rack system).
- We also recommend additional outlets in the office for printers, lamps, and other accessories.

SECURITY

LOW VOLTAGE WIRING

It is best practice to locate your modem and router/switch together in the rack system. If the modem and router/switch are not located together, your contractor will be responsible for running one CAT5e cable from the modem to the location of router/switch.

If your managed router is located in the rack system, ProVision Security will run individual CAT5e cables from the managed router/switch to items located in the rack system (DVR/NVR, AccessPro and security panel). If your managed router is not located in the rack system, your electrician or contractor will be responsible for the individual CAT5e runs from the router to the rack components. Additionally, your electrician or contractor is responsible for any long CAT5e runs to any other device that you have that requires internet (i.e. a computer in a different room than rack system). ProVision Security does not do any TV wiring.

INTERNET

Internet access **MUST** be ordered and installed prior to our technician arriving onsite. You are required to send pictures of the modem powered on and set up to your ProVision Project Manager, prior to the Technician Arriving at the club. Anytime Fitness Corporate requires that you have functional remote viewing of your cameras. A static IP address must be purchased from your Internet Service Provider for you to view the DVR remotely.

PHONE

The security system will be integrated with an alarm monitoring service. ProVision Security will use a cellular network for your security panel to communicate and transmit signals to the central monitoring station. This cellular network connectivity eliminates the need to connect a phone line to your security panel for communication.

You will need to purchase a dedicated phone line for your 911 emergency phone. This line is always available for an emergency call and is typically located near your AED and hardwired panic button. Please note: This line can be any of the types listed above.

SECURITY SYSTEM

The security panel will be located on the wall behind rack. A motion detector must be installed in the room the rack system is located in, protecting the security panel from tampering. The power source for the security panel will be supplied by a 15 amp dedicated circuit (see "Electrical Outlets" (above) for details.)

Please keep extra batteries on-hand for replacement for wireless door contacts and panic devices.

Some local municipalities require a permit to operate a security system. Check with your local authorities to see if this is the case in your area.

In-addition to the security system components, the following items must be installed on the premises:

1. A telephone for 911 call access.
2. A sign in plain view with an advisory warning that indicates members of a non-staffed health spa should be aware that working-out alone may pose risks to their health and safety.

SECURITY

EQUIPMENT INSTALLATION AND GENERAL CONSTRUCTION REQUIREMENTS

ProVision Security will assign you to a dedicated Project Manager that will walk you through from sales and design, to the implementation and opening of your club. Please be sure to be reaching out to Provision 12 weeks in advance, so proper planning can take place.

Before your security system is installed, certain aspects of your build-out must be completed by your General Contractor. Your ProVision Project Manager will provide you with an *Additional Requirements Checklist* two weeks prior to your tentative installation date to confirm those items have been completed, you may also be asked to send photos as supporting documents.

ALARM PERMITS

Contact your local authorities for information regarding alarm permits. Occasionally emergency professionals require businesses to apply for an alarm permit. If an alarm permit is mandated by your local municipality, you will be required to apply for and purchase this permit for the operation of your alarm system. Please view the False Alarm Policy on the [Security Monitoring and Testing](#) Page of the Anytime Fitness Academy.

Mandatory Vendor: ProVision Security

Refer to Vendor Schedule in Design Compliance Packet (DCP) for contact information

SOUND

MUSIC LICENSING AND MESSAGING SYSTEMS

A quality sound system that plays upbeat music will improve the workout experience for your members. Keep in-mind, however, that you must obtain permission from the owner of the music or their representative before you can legally play it in your club. This may sound complicated, but when you partner with a music service, they will provide you with licensed music. A music system can also be integrated with a messaging component.

Exclusive Designated Vendor: Rockbot

Refer to Vendor Schedule in Design Compliance Packet (DCP) for contact information

EXTERIOR SIGNS

Your exterior signage may be the first encounter your market has with Anytime Fitness. Therefore, you need to give this component of your business the attention it deserves! To ensure a strong brand identity, your Anytime Fitness sign must contain the Anytime Fitness logo with Running Man and the “Moniker”. The sign must be built per the Anytime Fitness standards.

To help you achieve this goal, we have worked with a select group of vendors to optimize our signage specifications. The result is a greatly improved design that displays the true Anytime Fitness purple! This was made possible by partnering with industry leaders to develop a custom purple vinyl. **The custom purple vinyl is REQUIRED for all exterior signage and is only available through the Designated Sign Vendors.** The Designated Sign Vendors will work with you to achieve a look that is consistent with our brand image and complements your building site. There are many benefits to the program including; the custom purple vinyl, a complete warranty, automatic approval from corporate, reduced pricing and cradle to grave service. From design through installation and beyond the Designated Vendors are committed to you.

A couple of additional items to consider with your exterior signage. It is strongly recommended to include your exterior signage shop drawings in your lease, it is a great time for the Landlord to approve and can prevent problems later during the buildout. Check with your real estate broker for details. As a Franchisee, you assume all accountability for the signage, including approvals and inspection by all required parties.

The final power hook up and optional timer may have to be completed by a licensed electrician, confirm with your local building codes. In this case most sign installers are not able to make this final connection. You will need to coordinate this task with your general contractor. Be aware this may incur an extra cost.

Designated Vendor Responsibilities:

- Conduct a site survey of your space.
- Review local codes regarding exterior signage.
- Review Landlord sign criteria per your final lease.
- Provide you with a shop drawing showing the proposed signage per the Anytime Fitness sign specifications, Landlord sign criteria and local codes.
- Obtain Landlord approval.
- Obtain required city permits and inspections.
- Arrange installation of exterior signage.
- Provide applicable warranty for signage.

EXTERIOR SIGNAGE

Exterior signage can take 8-10 weeks from the time you start, to when the sign is installed on the building. You will want to get your sign installed as soon as possible to take advantage of the extra visibility for your presale.

EQUIPMENT ORDERING

Remember you need to order your equipment at least 8-10 weeks before the desired delivery date. It is advisable to work with your Franchise Business Consultant and Equipment Representative as soon as you receive your Compliance Drawing. The final equipment list and layout should be determined with your Equipment Representative and Franchise Business Consultant very early on. Once finalized, the equipment information and location must also be provided to your electrical contractor for coordination.

VERIFY MEASUREMENTS IN FIELD

If your landlord or real estate agent provides you with a plan of your space, you **MUST** double check all dimensions and conditions. The slightest inaccuracy can cause shortages of materials, additional costs, and potential construction delays. It is strongly recommended that you have a detailed site survey completed to accurately document the existing site conditions of your space. This can be completed by an architect or an experienced survey company (See page 5). Your CDM can help you determine what you have and need

BLOCKING

You will need to provide in wall blocking and support for fixtures, equipment and devices mounted to the wall. Common needs for blocking are listed below. Your architect will need to specify the material, location and height in the construction drawings

- Restroom sinks
- Grab Bars & Shower Seats
- Cubbies and Counters
- TVs
- Shelving

Development Process

This section provides a brief overview of the major milestones involved in the development of an Anytime Fitness facility.

- 1. REAL ESTATE** Work with your SEB Real Estate Manager and Store Development Coordinator (SDC) on the Site Approval for your club.
- 2. CLUB LAYOUT / DESIGN** Your Construction Design Manager (CDM) will contact you after you receive site approval to initiate the design of your club. You will work with your CDM to create the approved design for your club. Refer to DESIGN PROCESS
- 3. EXTERIOR SIGNAGE** Contact one of the Designated Sign Vendors listed on the Vendor Portal to initiate the process for approval, fabrication and installation of your exterior sign. This is a lengthy process, so don't delay. This should begin once you have signed the lease.
- 4. ARCHITECT / CONSTRUCTION DRAWINGS** Contract with the Designated Architect to create a full set of construction documents matching the detail and format of the Anytime Fitness prototype drawings and the DCP. The Designated Architect has the experience and brand knowledge to meet this requirement.
- 5. PERMIT AND APPROVALS** Submit your construction documents for permits and approvals with the governing authorities and your landlord. It is recommended you contract with your architect to handle this step. In some jurisdictions the GC may need to submit these.
- 6. GENERAL CONTRACTOR / BIDDING** Obtain bids from a qualified general contractor. We recommend competitively bidding your project w/ a min. of 3 qualified general contractors. Allow 3 weeks for the bidding process. Once you receive your bids, you will need to qualify the numbers, select a general contractor, award the project, set a schedule with your GC and execute a contract. You are required to submit a detailed line-item cost breakdown "Schedule of Values" (SOV) from the GC prior to starting construction.

DEVELOPMENT PROCESS

- 7. PRECONSTRUCTION** Accept the premise from your landlord and ensure it meets the delivery conditions as defined in your lease agreement. Notify the General Contractor of the start date based on the delivery of the space. Meet with your lender and review the required documentation that will be needed from the contractor during construction. Identify your rent commencement date so that you and your GC can build the schedule accordingly so that construction is finished prior to paying rent.
- 8. CONSTRUCTION** Once you have received your permits and approvals, and executed a contract with contractor you are ready to begin construction. Work with your contractor to ensure you have a comprehensive schedule including coordination of owner supplied items and materials; e.g., signage, millwork, equipment and Provision Security. Make sure you have satisfied all your lease obligations related to construction: i.e., certificate of insurance, approval of construction documents, contractor approval, etc.
- 9. OPENING** Once construction is complete and the city has granted the certificate of occupancy, you are ready to open. The GC should do a final construction clean, but it is important that you deep clean or have it cleaned professionally as well prior to open.
- 10. CONSTRUCTION CLOSE** Once the construction is complete, you should walk through with the GC to do a “punch list” which identifies any items that need to be corrected. This can be scrapes on the wall to items not completed correctly. Write these items down and with the GC identify when these need to be completed. The punch list should be completed and signed off prior to making your last payment. The GC should also provide you an Owner's manual with the information about maintenance of the items installed.

Throughout this process, you will work with your Franchise Business Consultant on a series of tasks; ordering equipment, pre-sale, billing etc. They will walk you through these items.

Interior Finishes

INTERIOR FINISHES

SPECIFICATIONS

Refer to Vendor Schedule for Ordering Information

FINISH	MANUFACTURER	STYLE	COLOR	SAMPLE	NOTES
CARPET	PATCRAFT	DARKER HAZE	SWITCHED		INSTALL LINEAR BRICK PATTERN CARDIO, STRENGTH, OFFICES
CA-1		69557	802U0		
RUBBER	ECORE INTERNATIONAL	EVERLAST ROLL	PUMPIN' PURPLE		FREE WEIGHTS
RF-1			EL09		
TURF	ECORE INTERNATIONAL	CUSTOM	LAMINATE L1		FUNCTIONAL TRAINING
TURF		218	BETTER PURPLE		
LUXURY VINYL TILE	PORTICO SYSTEMS	RUSTIQUE	TITANIUM		CARDIO, STRENGTH OFFICES 1/2 OFFSET PLANK
LVT-1	NATURE VIEWS	18 X 36	NVS3724		
		40MIL			
STAINED CONCRETE	AMERIPOLISH	3D HS DENSIFIER	GRAY		CARDIO, STRENGTH OFFICES
STC		SURELOCK DYE			
		3D SP STAIN PROTECTOR			

INTERIOR FINISHES

SPECIFICATIONS

Refer to Vendor Schedule for Ordering Information

FINISH	MANUFACTURER	STYLE	COLOR	SAMPLE	NOTES
VINYL BASE	JOHNSONITE	40	BLACK		THROUGHOUT, EXCLUDING RESTROOMS
VB-1		6" COVE BASE			
VINYL TRANSITION STRIP	JOHNSONITE	CE-40-C/MTC-00-A	BLACK		ALL FLOORING MATERIAL TRANSITIONS
TS-1		12' T MOLDING			
		12' FLEX TRACK			
WALL MIRRORS	THE MIRROR COMPANY				FREE WEIGHTS
MIRROR					
WALL PROTECTION	INPRO ARCHITECTURAL	PALLADIUM RIGID SHEET	PEWTER GRAY		FREE WEIGHTS
	PRODUCTS	406/ .060 THICK	*0107		
		3/4" TAPE-ON CORNER GUARD			
TILE	DALTILE	MODERN FORMATION	SMOKY RIDGE		LOBBY, HALL, RESTROOM FLOOR 1/2 OFFSET PLANK GROUT: MAIPEI FLEXCOLIR CQ107-IRON GROUT JOINT 1/8" INSTALL PER TCNA GUIDELINES
T-1		MF05	MF0512241PK		
		12 X 24			


INTERIOR FINISHES

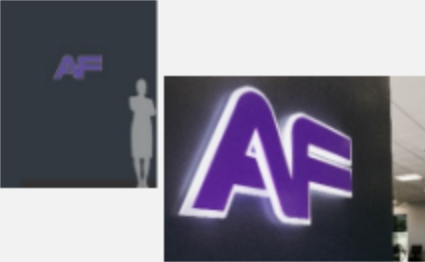
SPECIFICATIONS

Refer to Vendor Schedule for Ordering Information


FINISH	MANUFACTURER	STYLE	COLOR	SAMPLE	NOTES
TILE	DALTILE	MODERN FORMATION	SMOKY RIDGE		RESTROOM SHOWER & BASE
T-2		MF05	MF0512241PK		CUT DOWN TO 6 X 24
		12 X 24			GROUT: MAIPEI FLEXCOLIR CQ107-IRON GROUT JOINT 1/8" INSTALL PER TCNA GUIDELINES
TILE	DALTILE	COLOR STORY	BLALNCE MATTE		RESTROOM & SHOWER WALLS
T-3		#00348241P2			GROUT: MAIPEI FLEXCOLOR
		8 X 24			CQ #77 FROST 1/3 OFFSET PLANK GROUT JOINT 1/8" INSTALL PER TCNA GUIDELINES
TILE	DALTILE	MODERN FORMATION	SMOKY RIDGE		SHOWER FLOOR
T-4		MF05	MF0522MS1P1		GROUT: MAIPEI FLEXCOLIR
		MOSAIC			CQ107-IRON GROUT JOINT 1/8" INSTALL PER TCNA GUIDELINES



Remodel Scope

REAL AF REMODEL				
AREA	ELEMENT	DESCRIPTION	STANDARD SCOPE (required)	ADDITIONAL SCOPE (optional add-ons)
EXTERIOR SIGNAGE				
	Wall Mounted Signage	Replace to current brand standards if club sign is 10 years or older. If sign in poor condition, required to replace prior to 10 years. Wordmark 'Anytime Fitness' with Logo + Moniker	✓	N/A
	Moniker	Required to add moniker if not installed already (subject to space / size allowance)	✓	N/A
	Monument and Blade Signage	If signage space is available add wordmark 'Anytime Fitness' with Logo, no moniker in order to maximize signage	✓	N/A
	Entry Door Vinyl + Hours	Acrylic Fame to post hours staffed. Include QR Code for membership details	✓	N/A
	Access Entry Signage	Member entry pass scanner	✓	N/A

REAL AF REMODEL				
AREA	ELEMENT	DESCRIPTION	STANDARD SCOPE (required)	ADDITIONAL SCOPE (optional add-ons)
GUEST LOBBY				
	AF Monogram Signage	Signage Required, preferred lit: Non-Lit or Lit Signage options available	✓	✓
	Lightbox	Single sided lightbox required Double sided lightbox - optional if space layout works	✓	✓
	Digital Guest Waiver Stand	Required in all guest lobby.	✓	
	Decorative Lighting	3 Pendants add for above 11'-0" ceiling heights		✓
	Furniture - Bench	If adding a bench, must be our vendor specified bench		✓

REAL AF REMODEL				
AREA	ELEMENT	DESCRIPTION	STANDARD SCOPE (required)	ADDITIONAL SCOPE (optional add-ons)
MEMBER LOBBY				
	Rock Boot Tray	Required to either do Rock Boot Tray or Cintas Approved Mats	✓	✓
	Furniture - Bench	Seating required, approved vendor specified bench only	✓	
	Elevated Black Cubbies w/ Coat Rod	Required raised cubbies. Black ONLY. Legs purchased by specified vendor, cubbies purchased by two specified vendors	✓	
	Feature Wall	Required to be built per spec. Signage required, by specified vendor (gel marker board, pegboard, acrylic frames)	✓	
	Cubby Signage	Required, purchased by specified vendor	✓	
	Lost + Found Box	Required, purchased by specified vendor	✓	
	Decorative Lighting	3 Pendants add for above 11'-0" ceiling heights		✓

REAL AF REMODEL				
AREA	ELEMENT	DESCRIPTION	STANDARD SCOPE (required)	ADDITIONAL SCOPE (optional add-ons)
MANAGER'S OFFICE				
	Logo Signage	Required, purchased through specified vendor	✓	
	Door + Window	Required: (1) single window + glass inset into door Addition: Angle, double frameless glass	✓	✓
	Exterior Accent Drywall	Added extra layout of drywall to add accent color around office	✓	
	Furniture - Chair	Can reuse existing, or purchase from vendor. Removal of all personal belongings and declutter.		✓
	Furniture - Desk	Can reuse existing desk, unless choose to upgrade with angle then need to purchase new desk to fit the angle wall from vendor.		✓
	Low Iron Glass	Regular clear glass is standard, can choose to upgrade to low iron glass.		✓

REAL AF REMODEL				
AREA	ELEMENT	DESCRIPTION	STANDARD SCOPE (required)	ADDITIONAL SCOPE (optional add-ons)
COACHING ROOM				
	Exterior Room Graphic	Required, purchased by specified vendor	✓	
	Accent Wall	Required, custom orange paint through Sherwin Williams.	✓	
	Poster + Acrylic	Required, purchased by specified vendor	✓	
	Furniture - Table	Required, purchased by specified vendor	✓	
	Furniture - Chairs	Required, purchased by specified vendor	✓	
	Furniture - Printer Stand	Required, purchased by specified vendor	✓	
	Scanner	Required, purchased by specified vendor	✓	

REAL AF REMODEL				
AREA	ELEMENT	DESCRIPTION	STANDARD SCOPE (required)	ADDITIONAL SCOPE (optional add-ons)
AFTS				
	AFTS Graphic	Required, purchased by specified vendor	☒	
	Furniture - Table + Chair	Optional, if choose to add furniture must be purchased by specified vendor. Fixed and Freestanding table available.		☒
	Accent Wall Bump	Optional, adding a bump wall to highlight signage and furniture.		☒
	TV	Optional, to stream marketing content.		☒
	Turf	Required, 500SF at minimum for all clubs for functional training.	☒	

REAL AF REMODEL				
AREA	ELEMENT	DESCRIPTION	STANDARD SCOPE (required)	ADDITIONAL SCOPE (optional add-ons)
CLUB SIGNAGE				
	Free Weight Monogram Graphic	Required, purchased by specified vendor	☒	
	You've Got This Graphic	Required, purchased by specified vendor	☒	
	We're Building Muscle Graphic	Required, purchased by specified vendor		☒
	Purple AF / White AF Graphic	Required, purchased by specified vendor		☒
	Away Signage	Required, purchased by specified vendor	☒	
	4 Regulatory Signs	Required, purchased by specified vendor	☒	
	Emergency Signs	Required, purchased by specified vendor	☒	
	Room Signage	Required, in all clubs and updated to new signs	☒	