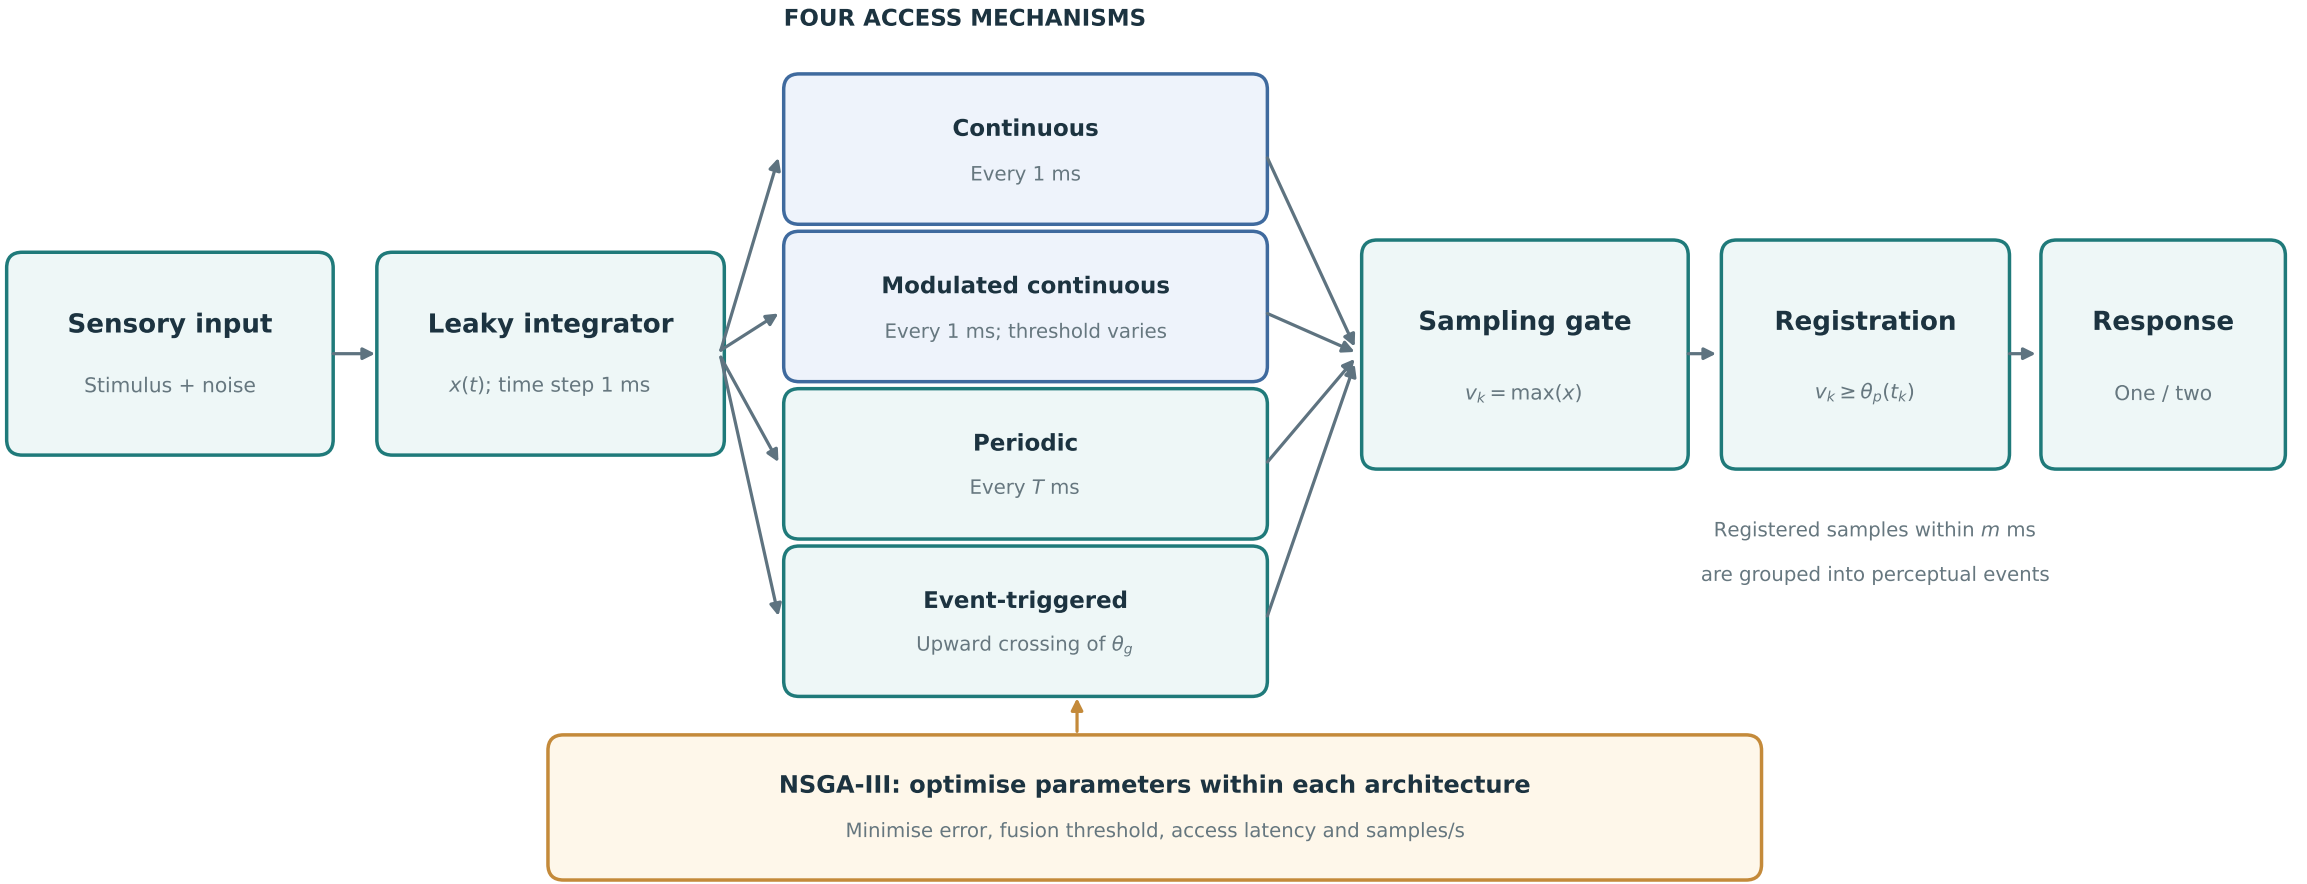
FOUR ACCESS MECHANISMS
Sensory input
Stimulus + noise
Leaky integrator
$x(t)$; time step 1 ms
Continuous
Every 1 ms
Modulated continuous
Every 1 ms; threshold varies
Periodic
Every T ms
Event-triggered
Upward crossing of θ_g
Sampling gate
$v_k = \max(x)$
Registration
$v_k \geq \theta_p(t_k)$
Response
One / two
Registered samples within m ms
are grouped into perceptual events
NSGA-III: optimise parameters within each architecture
Minimise error, fusion threshold, access latency and samples/s