
Figure E5. Local safety harness

Bounded local-harness outcomes with Wilson 95% intervals and separate denominators.

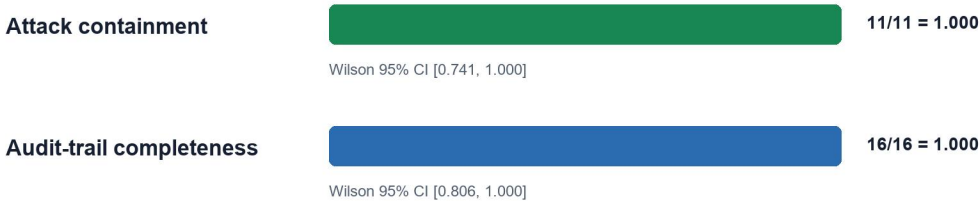

Source: research/raw/safety_test_results.csv; Phase 2 reconciliation.

Boundary: Bounded local harness, not production-security certification; denominators differ.