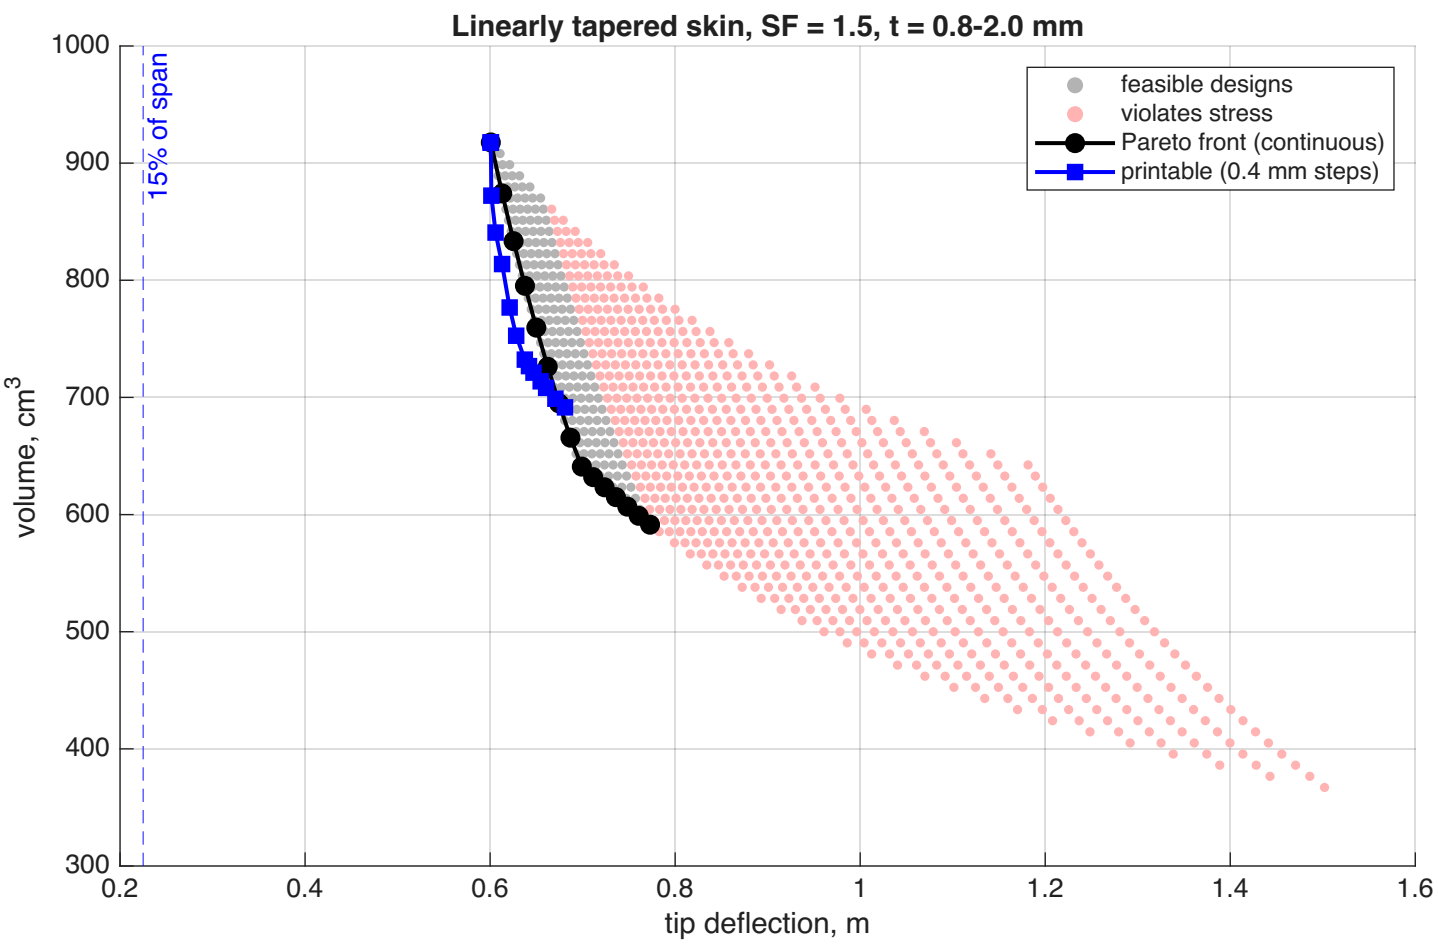

Linearly tapered skin, SF = 1.5, t = 0.8-2.0 mm
feasible designs
violates stress
Pareto front (continuous)
printable (0.4 mm steps)
15% of span
volume, cm3
tip deflection, m
1000
900
800
700
600
500
400
300
0.2
0.4
0.6
0.8
1
1.2
1.4
1.6