

Bridge Inspection Safety Plan



June 24, 2025

Version	Date	Comments
1.0	9/14/2018	Origination / Adoption
1.1	2/25/2019	Revised Section V.B.4
1.2	6/24/2025	Revised Section III.A.

Table of Contents

I.	Introduction.....	1
II.	Roles and Responsibilities	2
A.	Bridge Inspection Safety Manager	2
B.	Project Manager	2
C.	Person-in-Charge of On-Site Safety	3
III.	Training and Competency Requirements	3
A.	Training Requirements	3
B.	Competency Requirements.....	3
IV.	Employee Responsibilities	4
A.	Personal Safety Responsibility	4
B.	Conduct	4
C.	Drugs and Alcohol.....	4
D.	Smoking and Tobacco-Free Policy.....	5
E.	Housekeeping	5
F.	Emergency and Incident Reporting	5
G.	Personal Protective Equipment.....	6
H.	Lifting.....	6
V.	Safety Policies	7
A.	General Policies.....	7
1.	Project-Specific Safety Plan	7
2.	Worksite Risk Assessment.....	7
3.	Daily Safety Meetings	8
4.	Personal Protective Equipment (PPE).....	8
5.	Communications.....	9
6.	Electrical Safety.....	10
7.	Company Leased/Owned/Rented Vehicles.....	10
8.	Equipment Operation.....	10
B.	Working at Height	11
1.	100% Fall Protection	11
2.	Ladders	11
3.	Aerial Lift Equipment.....	11
4.	Rope Access Policy	11
C.	Work Zone Requirements.....	11
1.	Work Zone Traffic Control.....	11
2.	Railroad Work Policy	12

I. Introduction

Employees will be safeguarded through proper training, provision of appropriate work surroundings, and procedures that foster protection of health and safety. All work conducted by employees of Strinteg will adhere to the intent of this policy.

No duty, no matter what its perceived result, is more important than employee health and safety.

Employees are encouraged to report any unsafe work practices or safety hazards encountered on the job. Immediately report all accidents, incidents, and near misses (no matter how slight) to the supervisor in charge of on-site safety. Each employee of Strinteg has the right to stop work at any point that a safety hazard or potential safety hazard is identified. Work shall not resume until appropriate action has been taken to prevent or eliminate the concern. The following principles reflect this safety policy and shall be followed by all site personnel, including sub-consultants, if any.

- All accidents are preventable through implementation of effective safety and health control policies and programs.
- Safety and health controls are a major part of our work every day.
- Accident prevention is good business. It minimizes human suffering, promotes better working conditions, hold Strinteg in higher regard with clients, and increases productivity.
- Management is responsible for providing the safest possible workplace for employees. Consequently, management of Strinteg is committed to allocating and providing all necessary resources to promote and effectively implement this safety policy.
- Employees are responsible for following safe work practices, abiding by company rules and policy, and ultimately for preventing accidents and injuries.
- Management will establish and maintain open lines of communication to solicit and receive comments, information, suggestions, and assistance from employees where safety and health are concerned.
- Management shall monitor company safety and health performance, working environments, and conditions to ensure the program objectives are being achieved on a consistent and regular basis.
- This safety program applies to all employees of Strinteg and persons affected or associated in any way by the scope of this business.
- This safety program is a living document which shall be reviewed and updated on a regular basis to ensure applicability to the firm's organization and project scope of work.

Every Strinteg employee must be involved and committed to safety. This must be a team effort. Together, we can prevent accidents and injuries. Together, we can keep each other safe and healthy in the work that provides our livelihood.

II. Roles and Responsibilities

Every employee of Srinteg is equally responsible for maintaining our culture of safety and proactive awareness of hazardous conditions and situations. To further this intent, the following designated roles shall be maintained throughout the organization to ensure safe practices are followed regularly and consistently.

A. Bridge Inspection Safety Manager

The Bridge Inspection Safety Manager is responsible for maintaining the Bridge Inspection Safety Plan and ensuring safety practices conform to Srinteg and OSHA regulations. Other responsibilities include:

- Resolve questions, approve and/or recommend necessary expenditures to correct unsafe conditions.
- Plan, coordinate, perform, or delegate all safety training and testing given to supervisors and employees. Review results to be sure they are satisfactory. Maintain appropriate records for training and testing.
- Review safety inspection reports and unsafe conditions reported by employees. Make or obtain corrections as required to maintain a safe workplace and ensure compliance.
- Ensure compliance with safe work practices and Srinteg's safety rules. Take appropriate disciplinary action to ensure compliance.
- Review disciplinary actions with employees.
- Investigate accidents and assist with completion of accident report forms when required.
- Review reports of first aid incidents and reportable injuries to determine possible preventative actions. Take immediate corrective actions as required.
- Conduct periodic safety assurance reviews to ensure employee compliance with the safety plan.

B. Project Manager

The project manager is responsible for implementation and compliance with this safety plan. Other responsibilities include:

- Actively participate and follow the safety and health programs.
- Make regular site visits and safety inspections to determine if safe work practices are being observed and ensure that unsafe conditions do not exist.
- Conduct regular safety meetings with employees to promote safety awareness and compliance with the health and safety program.
- Distribute safety-related memos addressing corrective action for prior near misses, accidents, and significant safety issues – including industry distributed publications of near-misses and accidents.

- Ensure that contract-specific programs are being implemented and maintained on a consistent basis.
- Ensure drivers operating motor vehicles are approved drivers.
- Ensure equipment operators have any required safety training, certification, relevant experience, and authorizations.

C. Person-in-Charge of On-Site Safety

A qualified individual, assigned by the project manager, shall responsible for the day-to-day safe operations of work for a given job site. Other responsibilities include:

- Actively participate and follow the safety plan.
- Review environmental conditions the day of each planned inspection and monitor throughout the day.
- Conduct a daily safety briefing utilizing the template found in **Appendix A**.
- Conduct worksite risk assessment of each bridge location prior to conducting field work utilizing the template found in **Appendix B**.
- Ensure all employees are provided and use appropriate personal protective equipment.
- Conduct daily inspections of group equipment, e.g. ladders, power tools, inspection vehicles, etc.
- Report any unsafe conditions to the project manager and resolve or mitigate prior to continuing work.

III. Training and Competency Requirements

A. Training Requirements

All bridge inspection personnel must complete required training prior to performing any inspection activities. Required training shall be established by the project manager and based upon the anticipated hazards identified in the risk assessment prior to the inspection work beginning. *All employees of Strinteg are required to successfully complete a Strinteg-approved OSHA 10-hour safety training course and maintain active Adult First Aid/CPR/AED certifications gained through an Accredited Provider by the IACET.* In addition to the above company-wide requirement, additional courses are available and shall be assigned by the project manager or bridge inspection safety manager to individual employees.

B. Competency Requirements

At Strinteg, active certifications must be matched with competency – gained through on-site experience under the supervision of a competent person(s) – before an employee can lead an activity involving work-related risks. Only after adequate supervision and sign-off by the supervising employee shall any employee be deemed competent with a given work activity involving worksite risks.

IV. Employee Responsibilities

A. Personal Safety Responsibility

Your primary responsibility as an employee of Srinteg is to perform all duties in a safe manner to prevent injury to yourself and others. If conditions are different than the work plan, **STOP** work and review the project safety plan. Modify the plan as needed and continue work according to the plan.

Safety – not productivity – is the single most important metric for our firm.

As a condition of employment, you **MUST** become familiar with, observe, and obey Srinteg's rules and established health and safety policies and proactively seek ways to prevent injuries while at work. Additionally, you **MUST** learn the approved safe practices and procedures that apply to your particular work tasks.

Before beginning special work or new assignments, you must review applicable and appropriate safety rules and procedures, and any manufacturer guidance for any equipment used.

If you have any questions about how a task should be done safely, you are under instruction **NOT** to begin the task until you discuss the situation with the on-site safety manager. Together, you will determine the safe way to do the job.

If, after discussing a safety situation with the on-site safety manager, you still have questions or concerns, you are required to contact the project manager or bridge inspection safety manager.

NO EMPLOYEE IS EVER REQUIRED to perform work that you believe is unsafe, or that you think is likely to cause injury or a health risk to yourself or others.

B. Conduct

Horseplay, practical jokes, etc., are forbidden. You are required to work in an injury-free manner displaying accepted levels of behavior and professionalism. Conduct that places you or others at risk, or which threatens or intimidates others, is forbidden.

C. Drugs and Alcohol

Use and/or possession of illegal drugs or alcohol on company property or on company time are forbidden. Reporting for work while under the influence of illegal drugs or alcohol is forbidden.

Do not attempt to conduct work or operate equipment if you are using prescription or over the counter drugs that may impair your ability to perform your regular duties. Consult with the project manager to determine if you should be working.

D. Smoking and Tobacco-Free Policy

In compliance with state and city smoke-free legislation, and to ensure that all employees are provided with a healthy working environment, all areas of the workspace are smoke-free without exception. Tobacco use of any kind, e-cigarettes and “vaping”, and smokeless tobacco, are strictly prohibited anywhere within Strinteg’s owned or leased spaces and are not permitted anywhere in the workplace, including any room or space in our indoor facilities or within company-owned or leased vehicles. Such activities in many locations are also not permitted within a certain distance of entry access points

E. Housekeeping

The following areas must remain clear of obstructions, both within the office and on-site:

- Aisles/exits/egress routes
- Access to fire extinguishers, emergency equipment, and first aid kits
- All electrical breakers, controls, and switches

Each employee is responsible for keeping work zones clean and safe of tripping hazards. Clean-up shall occur regularly throughout the day, disposing of trash and waste in approved containers, wiping drips/spills immediately, and putting equipment and tools away as you are finished with them.

F. Emergency and Incident Reporting

In the event of any serious injury, accident, or fire, call 911 or the location-coordinated emergency number, and provide the nature and location of the incident. Send someone to a safe but conspicuous location to meet emergency responders.

All work-related injuries or any type of accident, incident, or near-miss must be immediately reported to the on-site safety manager and the bridge inspection safety manager. After each medical appointment resulting from a work-related injury, you must (within HIPPA regulations), contact your supervisor to discuss your progress.

Related Occupational Safety and Health Program Elements:

- SA203 – Incident Investigation and Response
- SA209 Vehicle Safety and Incident Reporting

Upon discovering a fire, alert others in the immediate danger area and initiate evacuation from the area. When an evacuation signal is given, all employees shall immediately turn off equipment, close doors, and evacuate to their designated rally point. Attendance will be taken to account for all personnel. Stay together in the group until further instructions are received. Do not attempt to fight any fire which is beyond the incipient stage (small trash can size flame/smoke). To use a fire extinguisher, remember PASS:

- P – Pull (the safety pin)
- A – Aim (at the base of the fire)
- S – Squeeze (the lever)
- S – Sweep (side to side)

If you use a fire extinguisher, remember:

- Stay low
- Keep yourself between the fire and an exit
- Do not turn your back on a fire
- Immediately report the use to your supervisor for replacement

G. Personal Protective Equipment

Inspect PPE prior to each use. Do not use damaged PPE. You are required to maintain and keep PPE in a good, safe working condition. Below are basis PPE to be supplemented with project-specific PPE designated by the project manager or bridge inspection safety manager.

- Safety Glasses: Must be on your person and worn at all times during field assignments where there is a danger of particles entering the eyes.
- Safety Vests (Class II or Class III): Must be worn at all times during field work. Class III shall be worn during any nighttime work.
- Hard Hats: Approved hard hats shall be worn at all times during field activities.
- Work Boots: Must be worn at all times during field activities. The boots shall adequately protect the ankle and foot for the work being performed. Steel-toed boots may be required, depending upon project requirements.
- Gloves: Work gloves must be worn at all times when handling sharp or rough stock, climbing, or performing jobs which could cause hand injuries. Synthetic gloves must be worn when handling chemicals.
- Respirators: Only employees trained and authorized to use respirators are allowed to do so. Dust masks can be used on a “voluntary” basis in environments where there is airborne particulate matter. In known airborne contaminants are identified, ensure a respiratory protection plan is in place prior to work.
- Hearing Protection: Required in areas where noise exposure is more than 90dBA. A general administrative control is to wear hearing protection whenever a conversation is difficult to have when using a normal tone of voice. Keep in mind that wearing hearing protection adjacent to traffic makes it difficult to hear a potential vehicle threat.

H. Lifting

If you need help moving material, request assistance. Follow the below general guidelines:

- Do not attempt to lift awkward-sized materials or load more than 50 lbs without help.

- When you lift, use your leg muscles by squatting close to the load, preserving the curve in your back, spreading your feet, and lifting with your legs, keeping the load close to your body.
- When you turn holding an object, move your feet, and do not twist.

V. Safety Policies

A. General Policies

1. Project-Specific Safety Plan

The project manager shall develop a project-specific safety plan for each inspection prior to the start of work. The plan shall consider anticipated hazards, nearest hospitals (with directions), and identify required PPE and risk prevention processes. The plan shall be amended with the daily safety briefings completed at each inspection site on a daily basis, and shall be reviewed and approved by the bridge inspection safety manager.

2. Worksite Risk Assessment

The following standard safety risks have been identified for bridge inspections. This list is not all-inclusive and shall be amended by the project manager and on-site safety manager throughout the project duration:

- Working in or around highway lane closures or shoulders
- Working at height
 - Ladders
 - Aerial Lift Equipment
 - Inspection Platforms and/or scaffolding
- Working on and/or over water
- Working around railroad right-of-way
- Working at night
- Confined space entry
- Environmental hazards
- Respiratory, vision, and hearing hazards

The Strinteg general risk assessment procedure includes the following minimum steps:

1. Prior to the start of field work, the project manager shall review prior inspection reports, bridge plans, and aerial (Google Maps) imaging of the project site to:
 - a. Determine which of the standard bridge inspection safety risks apply to the project.
 - b. Identify non-standard safety risks based upon on-site conditions.
2. The project manager shall complete the worksite risk assessment upon completion of the site review and complete the site-specific safety plan.

3. The project manager shall identify and/or develop and implement appropriate risk control measures.
4. The on-site safety manager shall modify the worksite risk assessment based upon actual field conditions.
5. Each inspection vehicle will be equipped with a laminated risk mitigation form for the on-site safety manager and employees to use in identifying appropriate mitigation based upon potential risks.

Most of the major safety risks associated with bridge inspection projects have control measures that are established and promulgated by OSHA. The project manager is responsible for reviewing the current OSHA requirements at the time of the project, and to revise the risk control measures contained within the project-specific safety plan or worksite risk assessment.

The originator will update the submittal status spreadsheet located within the project folder and notify the designated initial reviewer that the document is ready for review.

3. Daily Safety Meetings

Daily safety meetings shall be performed at the beginning of work with all field personnel present. The meeting shall assign employee tasks and responsibilities, identify site-specific safety hazards, ways to mitigate those hazards, and list required PPE for the assigned tasks. The inspection team shall sign or initial and date attendance at the briefing. Any personnel who arrive on site after the meeting is held shall undergo a separate briefing prior to performing site work.

4. Personal Protective Equipment (PPE)

High visibility apparel and hard hats shall be provided to all Srinteg employees who require them, and shall be maintained in good, clean, whole, and not faded.

- High-Visibility Apparel: All Srinteg employees within the highway right-of-way shall wear high-visibility apparel meeting American National Standards Institute 107-2004 Class 3 standards for conspicuity and ISEA. Managers and supervisors shall decide if high visibility apparel is faded or soiled beyond reasonable usefulness in terms of conspicuity. When there is any doubt whether apparel offers employees the high-visibility characteristics intended, it shall be replaced with new apparel which unquestionably meets the intent to maintain very high levels of conspicuity.
- Hard Hats: Employees shall periodically inspect hard hats for cracks or signs of damage or deterioration. Supervisors shall ensure defective or faded hats are taken out of service and replaced. Hard hats shall be white; have reflective material on four sides; shall not be painted or materially altered in any way; and shall be worn as intended by the manufacturer. Decals and stickers, other than those issued by the vendor or expressly approved by Srinteg are expressly prohibited. Employees, while exposed to overhead hazards, flying objects, electrical contact, and other potential head injury hazards, shall wear an approved hard hat at all times. All persons in the highway right-of-way and all other designated areas shall wear a hard hat.

- Safety Footwear: Strinteg requires work boots for all employees engaged in bridge inspection activities. Work boots must be of adequate height to provide sufficient ankle support. Work boots need not have steel reinforced toes unless the controlling agency requires this feature.
- Eye Protection: Eye injuries can be virtually eliminated with the use of proper protection. This policy describes various types of eye protection and examples of tasks requiring their use, although the list of tasks is not intended to be all inclusive.

Strinteg requires safety glasses for all employees engaged in bridge inspection activities where particulate matter may enter the eyes. Safety glasses must be worn at all times during the use of power tools, when scraping rust scale or paint, or when removing debris from bridge members.

Strinteg shall supply and employees shall wear and maintain appropriate eye protection when performing tasks which present a potential for eye injury. All employees in the immediate area where a task is being performed who are also at risk for eye injury shall wear appropriate eye protection. Eye and face protective devices shall comply with American National Standards Institute (ANSI) Z87.1-1989.

Types of Protection:

- Safety Glasses: Designed to protect eyes against impact from small objects in accordance with ANSI Standards. Safety glasses shall have side shields to protect the eyes from material entering from behind the lens. Prescription glasses are not a substitute for safety glasses unless they meet ANSI Standards (normal prescription glasses are rated "impact resistant", which is less stringent than ANSI Standard requirements). Prescription safety glasses shall have identification on the lens or frames to be acceptable as safety eye wear. *Strinteg's policy is to supply its employees with reimbursement for prescription safety glasses. Contact your supervisor for additional information.*
- Goggles: Eye protection that forms a seal around the entire area of the eyes. Goggles with direct side ventilation holes are for impact protection. Goggles with indirect ventilation (holes are partially covered to restrict liquids from entering) provide chemical splash protection.
- Face Shields: Constructed of high impact plastic or metal mesh, and are used to increase the area of protection (entire face) from impact or chemical splash. Face shields should always be used in conjunction with safety glasses.
- Eye Wash: An important part of eye protection is the availability of emergency eye wash stations. Portable squeeze bottle eyewashes shall be available where employees are exposed to particles or noncorrosive liquids.
- Contact lenses do not provide eye protection. Their use without additional eye/face protection where required is prohibited.

5. Communications

Strinteg employees shall use mobile phones for the majority of communication required between field inspectors and office personnel. For specific site situations where mobile phones are deemed inadequate, project specific lines of communication will be established.

6. Electrical Safety

No work will be performed within 10 feet of electrical lines or energized equipment. Personnel shall avoid direct or indirect contact. Always assume that lines are “live” and carry high voltage. Electrical lines can only be considered “dead” when verified by the utility. Line voltage must be known prior to work near electrical lines. Operations shall conform to the High Voltage Proximity Act.

7. Company Leased/Owned/Rented Vehicles

Employees driving Strinteg leased, owned, or rented vehicles are required to complete a vehicle use agreement. Employees driving for work purposes must complete a motor vehicle record agreement and are subject to an annual motor vehicle record check. Contact your supervisor for assistance with obtaining approval to drive.

- Only employees authorized by Strinteg are permitted to operate Strinteg vehicles.
- No personal use of company vehicles are permitted.
- Seat belts / shoulder harnesses must be worn whenever seated near traffic or if the vehicle is in motion.
- All local and state traffic regulations and signs must be followed.
- No unauthorized riders are allowed at any time.
- All violations resulting in a ticket must be reported in writing to your supervisor.
- Driving while under the influence of alcohol or other drugs is forbidden.
- Do not use mobile phones or portable radios while driving, even with a hands-free device.
- All vehicle incidents must be reported

8. Equipment Operation

You must specifically be authorized by your supervisor to operate the following:

- Company vehicles.
- Machine and power tools.
- Aerial lifts: scissor lifts, boom lifts, bucket trucks, under-bridge inspection units.

Equipment operations must be in accordance with the manufacturer’s instructions. Equipment that does not have current operating manuals available on-site shall not be used.

When operating machines, operate in accordance with manufacturer recommendations, do not wear loose clothing, long hair should be tied up and back, remove jewelry, and sleeves should either be rolled all the way up or all the way down.

Never operate damaged or defective equipment. Turn the machine off and report it to your supervisor immediately.

Never tamper with, remove, or deactivate machine guards or controls designed to ensure safe operations. Never reach into an operating machine or moving machine part.

B. Working at Height

1. 100% Fall Protection

All work at height shall conform to OSHA and ANSI requirements for fall protection and personal protective equipment. Refer to OSHA Standard 29 CFR 1926 for details of Fall Protection Procedures and Equipment.

Employees working 6-feet or more above a lower level shall be protected by a passive fall protection system (OSHA specified railing or net), OR if unprotected by passive fall protection systems, where the danger exists for a fall of 6-feet or greater, shall use an active (personal) fall arrest system meeting OSHA/ANSI standards. *Strinteg maintains a 100% tied-off policy. Absolutely no lead climbing or alternate access methods are acceptable at any time.*

Because aerial lifts have passive fall protection (bucket or rail system), the intent of requiring a full body harness with lanyard attachment at all times is to prevent a “catapult effect” from occurring should the equipment be impacted.

2. Ladders

No aluminum ladders are to be used within 20-feet of electrical lines. Only ladders with a minimum load rating of Type IA 300 lbs capacity are allowed. The inspection team should select the proper ladder for the task to be performed.

3. Aerial Lift Equipment

Aerial lift devices shall conform to ANSI Standards applicable to the type of equipment being used: bucket truck, work platform, under-bridge inspection unit, portable or self-propelled personal lifts. Aerial lift devices shall only be used for the purposes intended by the manufacturer. All manufacturer recommendations and warnings regarding operation, capacity, inspection, and specific safety precautions shall be strictly followed. Permanent labeling must be conspicuously posted to indicate lifting capacity and travel height.

4. Rope Access Policy

Any rope access shall conform to the latest version of the Safe Practices for Rope Access Work, Society of Professional Rope Access Technicians (SPRAT).

C. Work Zone Requirements

1. Work Zone Traffic Control

Prior to going to the field, all traffic control requirements will be identified. The Manual on Uniform Traffic Control Devices (MUTCD) which provides specific information on the proper selection and use of lane closures and devices will be utilized. In addition, the team leader must verify

local city, district, or division traffic control requirements. Most bridge inspection work zones will be short-term stationary single-lane or shoulder closures and performed and supervised by the client agency. This does not alleviate the need for Strinteg team leaders to inspect traffic control closures to be within conformance with all standards and requirements prior to beginning work.

2. Railroad Work Policy

Due to the outweighed risk associated with work within a railroad right-of-way and onerous railroad-specific insurance requirements, Strinteg's current policy is to not offer engineering services within railroad right-of-way.



Risk Assessment & Daily Safety Briefing

Work / Project Location: _____

Srinteg Employee In-Charge of On-Site Safety and Phone#: _____
(Print Name)

Identified Risks*	Approach to Reduce/Eliminate Potential Issue/Hazard
Elevated Height / Fall Hazard	100% tie-off within 6' of unprotected edge access opening awareness trauma straps on harnesses ladder safety training proper fall arrest usage
Vehicular Traffic / Impact Hazard	situational awareness identify and stay within safe work zones never turn back to flow of traffic inspect traffic control setup prior to entering
Work over Water / Drowning Hazard	employ safety boat when necessary personal flotation devices wader belts
Aerial Lift & UBIU / Pinch, Crush, & Hydraulic Hazard	competent and qualified through appropriate training in aerial lift equipment awareness of exposure to hydraulic fluid and pinch-points 100% tie-off
Falling Objects	awareness of hazard zone properly fitted hard hats impact rated tie-off loose equipment whenever possible
Hot Environment / Fatigue Risk	stay hydrated take adequate breaks cool down when necessary look for signs of heat stroke among coworkers
Extreme Weather Events	halt work if weather becomes unsafe for task being performed track weather forecast prior to beginning work
Allergic Reactions / Wildlife Hazard	awareness of inspector allergies ensure corrective options are available on-site (i.e. Epipen) use snake guards

*** The hazard/risk cards are not an exhaustive list of hazards or exposures and can be amended to add additional hazards and mitigations. If conditions or new hazards are identified, STOP work and reevaluate this site-specific safety plan.**

Nearest Hospitals _____ CALL 911

Project Safety Plan and First Aid Kit On-Site with Emergency Procedures: Yes ☒ No ☐

Required PPE for Project Work (check appropriate PPE):

☒ Hard Hat / Class II Reflective Safety Vest / Safety Glasses / Safety Boots / Gloves / First Aid Kit

☐ Harness & Lanyard

☐ Other (_____)

Recognition Safety Meeting Held:

Signature	Date	Initials						
		Date	Date	Date	Date	Date	Date	Date

*** Upload completed form(s) to the appropriate Project Safety Folder & email to safety@srinteg.com ***

Bridge Inspection Worksite Risk Assessment

Bridge Number:	Bridge Description:	
Project Manager:	Phone (work):	Phone (mobile):
Site Leader:	Phone (work):	Phone (mobile):
Client Contact:	Phone (work):	Phone (mobile):

Emergency Response

Nearest Hospital from site and Phone No.	WSP Office Main Phone:
--	------------------------

Summary of Personal Protective Equipment (please check equipment required from risk assessment and/or by client)

- | | | | | | |
|--|--|---|---|---|-------------------------------------|
| ☐ Hard Hat | ☐ Safety Vest, Class 2 | ☐ Safety Vest, Class 3 | ☐ Foot Protection | ☐ Gloves | ☐ Respirator |
| ☐ Hearing Protection | ☐ Safety Glasses | ☐ Dust Mask | ☐ Disposable Coveralls | ☐ Fall Protection Body Harness | |
| ☐ Fall Protection Lanyard | ☐ Personal Flotation Device | | | | |

Are sub-consultant safety plans submitted? ☐ Yes ☐ No ☐ N/A – Not Applicable

Select the hazards or risks below that apply to the specific bridge to be inspected. The hazards or risks, and mitigations are to be reviewed prior to any field work. Please review the project hazard /risk cards in your vehicle.

- | | | | | |
|---|--|---|---|---|
| ☐ Weather Conditions | ☐ Roadway traffic | ☐ Mobile lift platform | ☐ Bridge over railroad | ☐ Energized Elec Equip |
| ☐ Portable Ladders | ☐ Traffic Control | ☐ Scaffolding | ☐ On/Over water | ☐ Elec/Mech Systems |
| ☐ Airborne dust | ☐ Noise | ☐ Catwalk/working surfaces | ☐ Boating, barges | ☐ Confined Spaces |
| ☐ Small Tools | ☐ Fall Protection | | | |

Project Staff Assigned to the work:

Site Leader

Date Reviewed on site

The hazard/risk cards are not an exhaustive list of hazards or exposures and can be amended to add additional hazards and mitigations. If conditions or new hazards are identified, STOP work and reevaluate this site-specific safety plan.

RISK or HAZARD	MITIGATION
Weather conditions	• Suspend work in the event of lightning • Work appropriately in high heat or cold climate conditions •
Airborne dust concerns	• Wear eye protection. • Wear dust mask respirators (for nuisance dust only) while performing up close inspections
Small Tools	• Wear eye protection for any type of chipping or scrapping. • Use tool lanyards if there is an opportunity for the tool to fall onto people, traffic or water. • Do not climb and attempt to carry small tools in your hand. • Inspect electrical cord sets for proper cord ends and no damage to outer insulation prior to each use. • Do not remove guards from tools and always use in accordance with the manufacturer's guidance.
Roadway traffic	• Remain at least 10 feet from traveled lanes whenever possible. • Stay behind traffic control devices. • Do not turn you back to traffic to work without someone watching traffic for you. • Utilize high intensity flashing beacons on vehicles whenever in traffic control areas.
Traffic Control	• Verify traffic control devices are properly placed per the TCP. • Verify line of sight and visibility of the devices for motorists.
Mobile lift platform	• Arrange for the proper mobile lift platform for your work, i.e., reach distance • Ensure documented training is conducted by the vendor on site • Daily inspections must be documented • Body harness and lanyard must be worn while in the lift basket • Ensure to connect the lanyard to the provided manufacturer anchorage point • Consider using a Self-Retracting Lifeline (SRL) for your lanyard while on a mobile lift platform
Scaffolding	• Do not access until it is determined to be safe for access by a "qualified person." • Look for tags or talk to the competent person prior to access. • Visually inspect the access and egress points for safe access.
Catwalk or working surfaces	• Pay attention to path, stop and look to inspect. • Verify condition of metal walkways or fixed ladders rungs, etc. Prior work or lack of maintenance can leave conditions in disrepair as a hidden trap. • Look for holes in deep grass or vegetation • Use extreme caution when walking on rip rap • Wear work boots or hiking type boots that provide ankle support and soles that provide good traction.
Bridge over railroad	• Complete owner safety training and orientation requirements • Submit a permit if working within the foul zone of the railroad • Obtain pre-access information from the flagger • Verify if flagger(s) are positioned to alert staff working within the foul zone should a train approach the work area.
On/Over water	• Verify the need for a rescue skiff or boat

	• If on boat and/or barge, communicate with Coast Guard or local authorities of your work on a navigable waterway around the bridge site • Wear a US Coast Guard approved Personal Flotation Device • Maintain a life ring on site. Ensure that it has at least 90' of line attached to it. • Ensure a fellow employee monitors you while working near the water's edge when there is current
Boating, barges	• Wear US Coast Guard Personal Flotation Device (PFD) while in the boat • Wear proper footwear for slippery surfaces inside the boat • Ensure the boat is steady before boarding. Use handholds to access. • Boat must be equipped with all safety equipment per US Coast Guard and/or local boating enforcement. • Should there be a small craft advisory because of high winds, postpone boating operations • Adequate access from ferry boat to barge must be provided. • Do not disembark the ferry boat or vessel to barge until they both move in the waves in unison. • Operator must be a licensed to operate the boat • Maintain communication with the US Coast Guard or local navigable waterway authorities of boat traffic during inspection.
Confined Spaces	• Prepare site specific confined space entry plan • Prepare a confined space entry permit • Coordinate stand-by rescue • Determine type of confined space – prepare a written plan for entry. • Employees must complete confined space training • Test the air in the space continuously using a multi gas air monitor (O₂, CO₂, H₂S, and LEL) • Lock out tag out electrical and mechanical hazards • Rescue is on standby
Energized electrical equipment (general)	• Assume all electrical equipment on site is energized • Use non-conductive tape measures around electrical equipment • Report unsafe or questionable electrical conditions • Maintain a 10 foot minimum clearance from electrical systems and conduits
Electrical and Mechanical Systems	• Utilize lock out tag out procedures and ensure the system is in zero mechanical state before conducting an up-close, hands-on inspection of movable bridge components • Determine line voltage for any electrical systems and provide minimum clearance requirements
Noise	• Wear hearing protection in continuous or intermittent high noise conditions • Use caution when wearing hearing protection around moving equipment and traffic
Personal Security	• Work in groups of two or more • Be aware of your surroundings and access and egress points • Use caution around structures that appear to have homeless or vagrants in the area. Be aware of drug paraphernalia or trash in the area

- Be alert for and avoid dogs, skunks, snakes, rats, racoons, and other wildlife. Consider that these animals have rabies or are venomous
- In snake infested area, “Snake Gators” should be considered for snake bite protection

How to ID Poison Ivy, Oak, and Sumac



Poison Ivy: The plant has shiny leaves, small yellow/green flowers and green/white berries. It grows as a vine, shrub or bush. It is common throughout the United States, except in some parts of the desert southwest, Alaska and Hawaii. The leaves of poison ivy grow in groups of three.



Poison Oak: The leaves of poison oak are similar to those of an oak tree, and grow in groups of three. It has white/green flowers and berries. Poison oak grows as a shrub and is common on the west coast of North America from Mexico to British Columbia.



Poison Sumac: The leaves of poison sumac grow in pairs; often 7-13 pairs on a stem with a single leaflet on the top. Poison sumac produces yellow/green flowers and white/green berries. The non-poisonous variety produces red-berries. Poison sumac grows as a shrub or tree and is common in the eastern United States and along the Mississippi River.

Prevention: Wear long-sleeved shirts and long pants if you will be in areas where these plants grow. Also, wear gloves to remove clothes and shoes, and wash them in hot water and detergent to remove any plant oil that may have come in contact with them.

Treatment:

1. Wash all exposed skin with strong soap and water to remove the oil. If no soap is available, rinse thoroughly with water.
2. If no water is available, carry a bottle of isopropyl alcohol or a waterless cleansing solution designed for prevention of poison ivy or oak rashes.
3. To reduce redness, ease itching and dry out dry out blisters, apply aluminum acetate solution soaked cloths and then calamine solution.
4. Take lukewarm baths with cornstarch or colodial oatmeal.

- Cover any oozing blisters with a clean gauze bandage soaked in baking soda and water solution.

Fall Protection



Snooper

Aerial Lifts

Bucket Boats

Fall Hazards

- Always keep feet on the floor of bucket/basket
 - Do not sit, stand, or climb on the edge of the basket.
 - Do not place any item in the bucket for the purpose of increasing work height (ladders, step stools).
 - Do not try to climb down from the bucket when it is raised.
 - Make sure bucket floor is clear of debris.
 - ALWAYS WEAR FALL PROTECTION!
 - Personal Fall Arrest System (PFAS) – Full body harness, lanyard, secure anchorage.
- Always consider the use of a retractable lanyard. Do not work over active traffic lanes. **Note:** Falls with a 6-foot lanyard can extend up to 15 feet.



Bucket Trucks



Leading Edge Work


Required Training (MyLP)

Course Description	Course Code	Duration
Fall Protection	fallprotection.1	50 min.
Fall Protection Equipment	fallprotectionequipment.1	50 min.
Motorized Mobile Platforms	motorizedmobileplatforms	45 min.

Note: Also, review the manufacturer's instructions for use and care of equipment.

Fall prevention or protection is required at heights 6' or more above the lower level including water.

Fall Clearance Distance

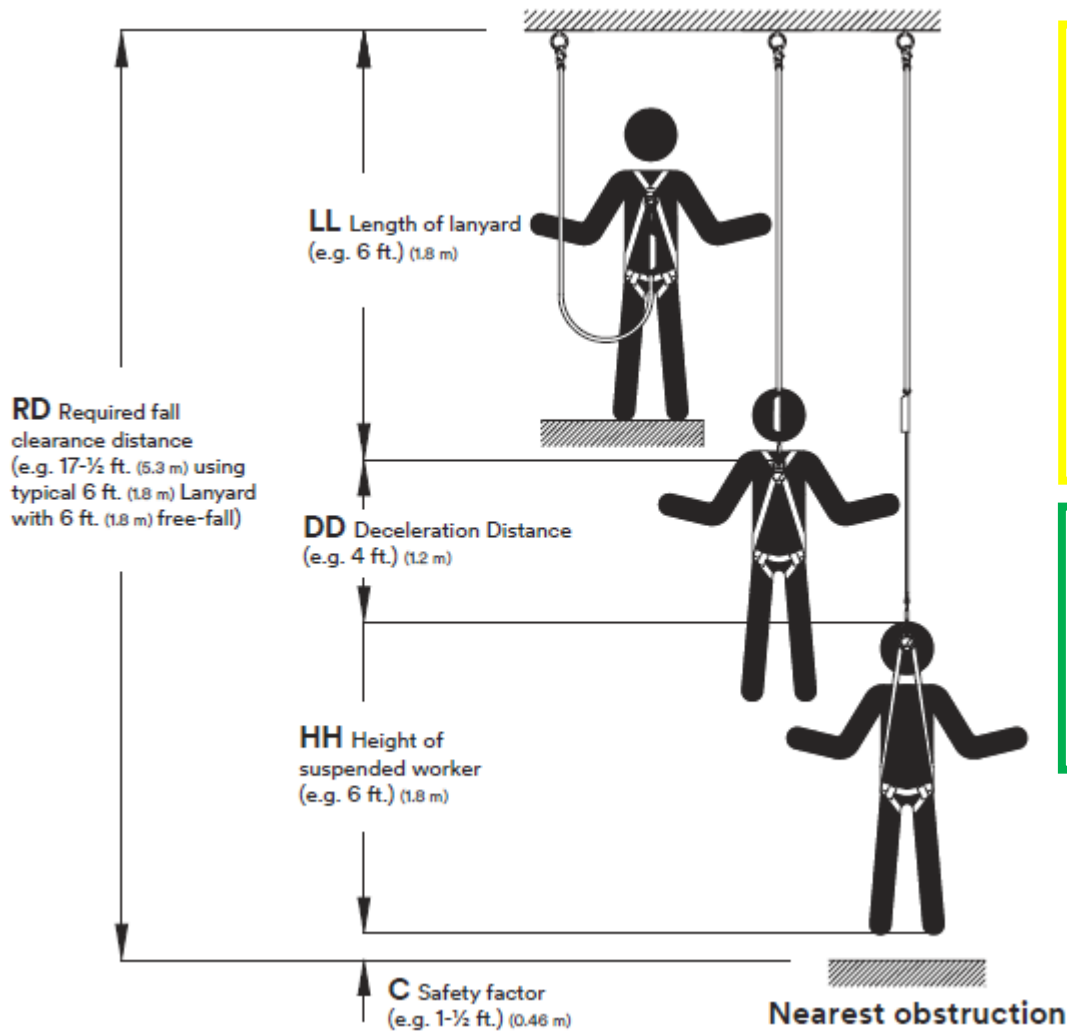

RD = LL + DD + HH + C 9 (Standard Lanyard)

1. Add 1 ft. to DD for free-fall over 6 ft. up to 12 ft. or for person over 310 lbs. up to 420 lbs. with 6 ft. max free fall for ANSI & OSHA compliant lanyards.
2. D-ring slide and harness stretch factors are built into DD.
3. DD shown in e.g. assumes maximum allowable amounts.
4. See User Instruction Manual for additional information.


RD = LL + DD + HH + C (Self Retracting Lanyard)

1. LL = length of SRL pulled out at time of use.
2. DD = Deceleration of manufactured device. Usually 18" to 24".
3. RD reduced by LL due to retractability of lanyard.

- Ensure that adequate fall protection anchorage is provided (must support a 5,000 lb load) before connecting your lanyard.
- Fall protection rescue plan has been prepared and coordinated.

- Ensure fall prevention is provided.

Portable Ladders

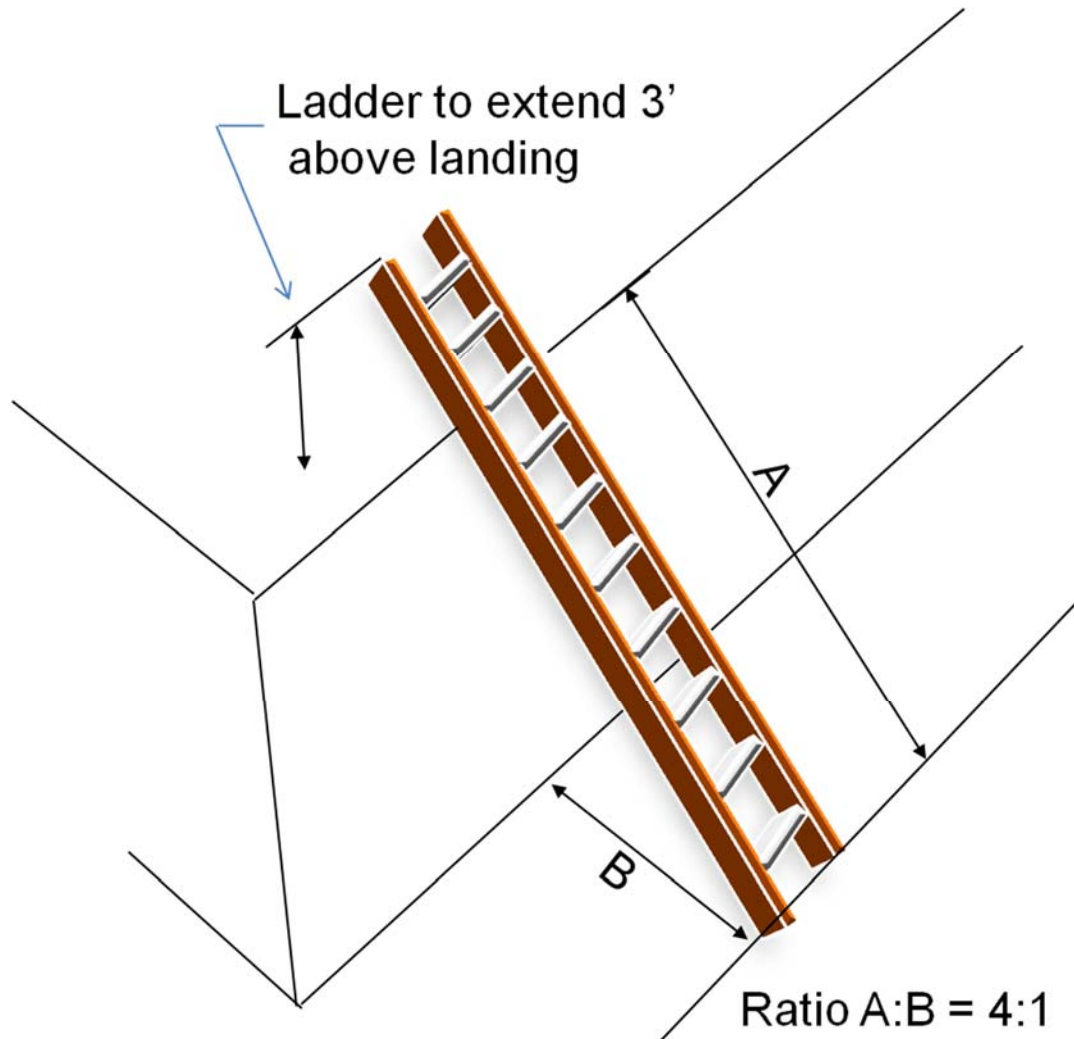

This diagram illustrates the proper use of a ladder. *A* is measured as the “working length” of the ladder, which is measured from the base of the ladder to where the ladder is resting on the landing. *B* is measured from the base of the landing to the base or foot of the ladder. *A* to *B* should be a 4:1 ratio

Safe Use of Portable Ladders

- Select the proper ladder for the task.
- Before each use, visually inspect the ladder for defects.
- Position the base of the ladder on a firm and level ground.
- The top of the ladder should be secured to the structure to prevent movement while in use.
- Ensure that the locks on the extension ladder are engaged.
- Maintain a 3-point contact with the ladder at all times and face the ladder when ascending and descending.
- Avoid electrical hazards – look for overhead power lines before handling the ladder. Do not use aluminum ladders. Use only Type 1A and 1AA Ladders.