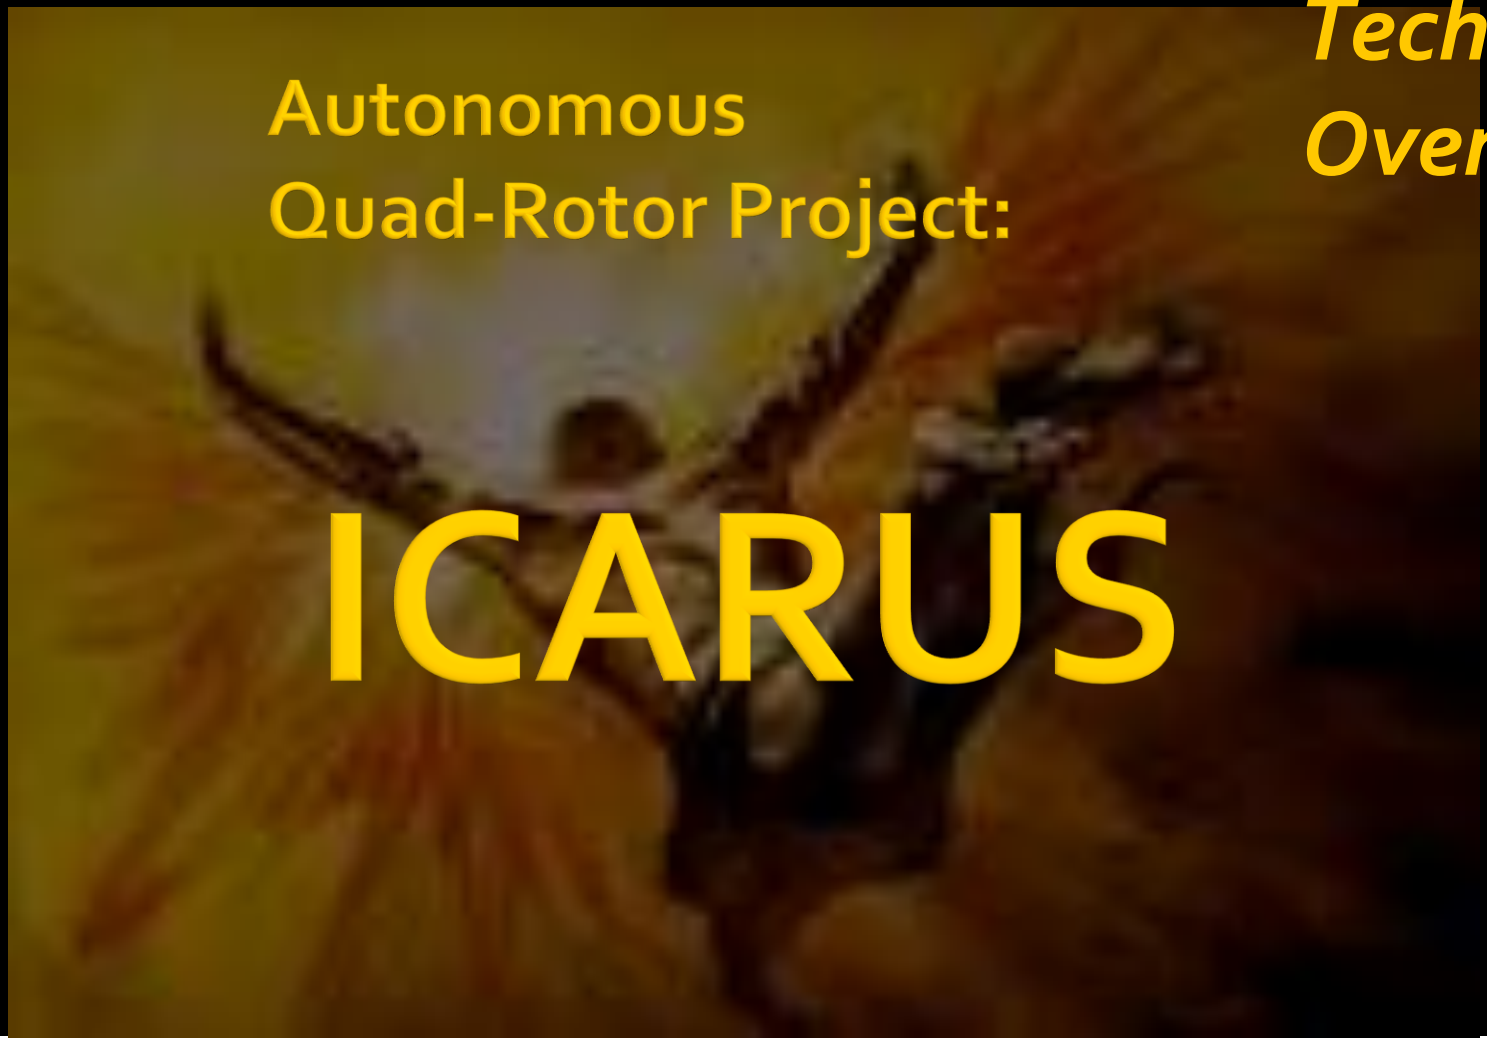

Autonomous
Quad-Rotor Project:

ICARUS

Technical Overview

Integrated Complex Advanced Robotic Unmanned System

David Gitz, EE, ICARUS Lead Engineer

ICARUS

Topics:

- System Description
- Capabilities and Technologies
- System Specifications
- Q&A

System Description

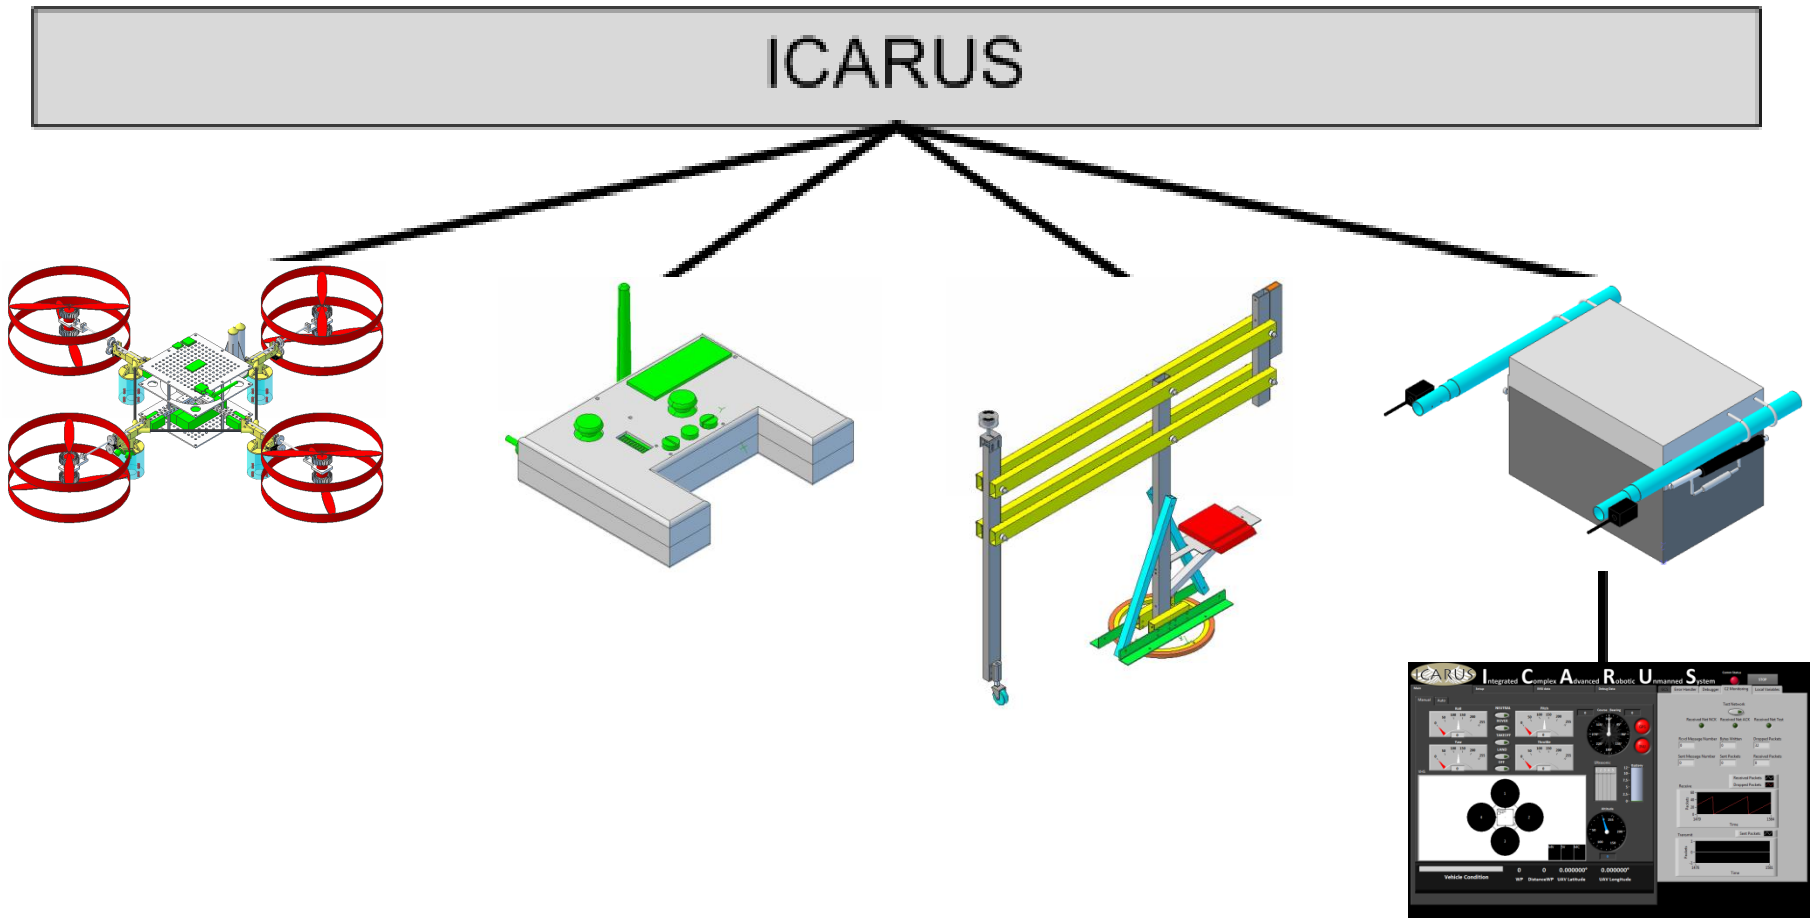

Vehicle

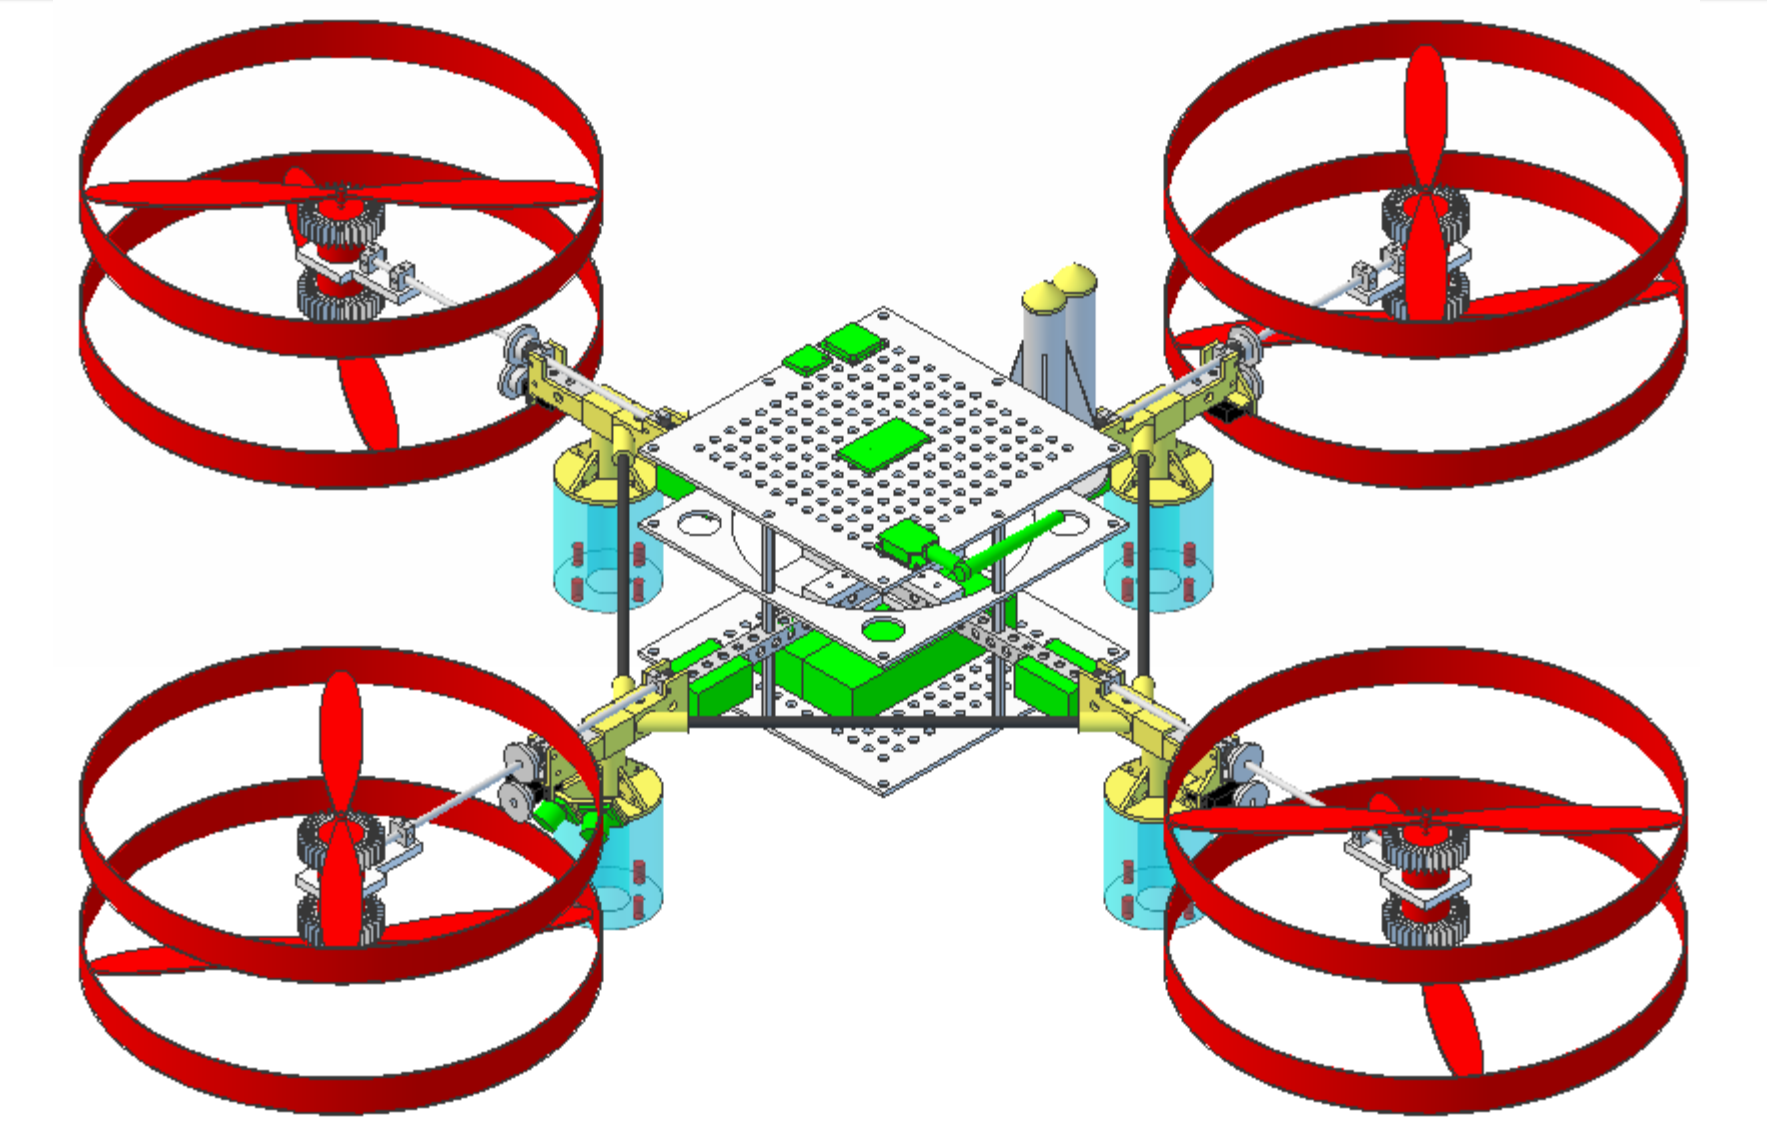

Vehicle

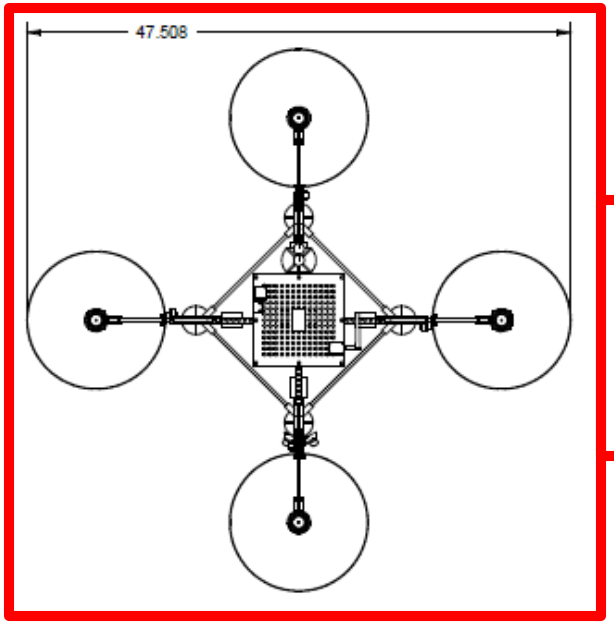

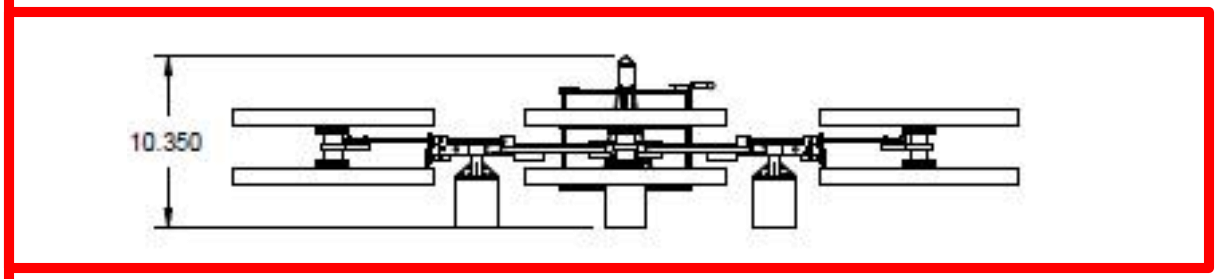

- Quad-Rotor design – Offers simpler control system with fewer moving parts than a single rotor helicopter and minor reduction in lift capacity

Vehicle

- 2 “Brains”, 1 SoM Board and 1 Parallax Propeller™ uC
- SoM handles waypoint navigation, mission planning, vehicle health.
- Propeller™ uC handles PWM generation.
- In the event of an in-air mishap, Propeller™ uC can take over Vehicle and land safely.

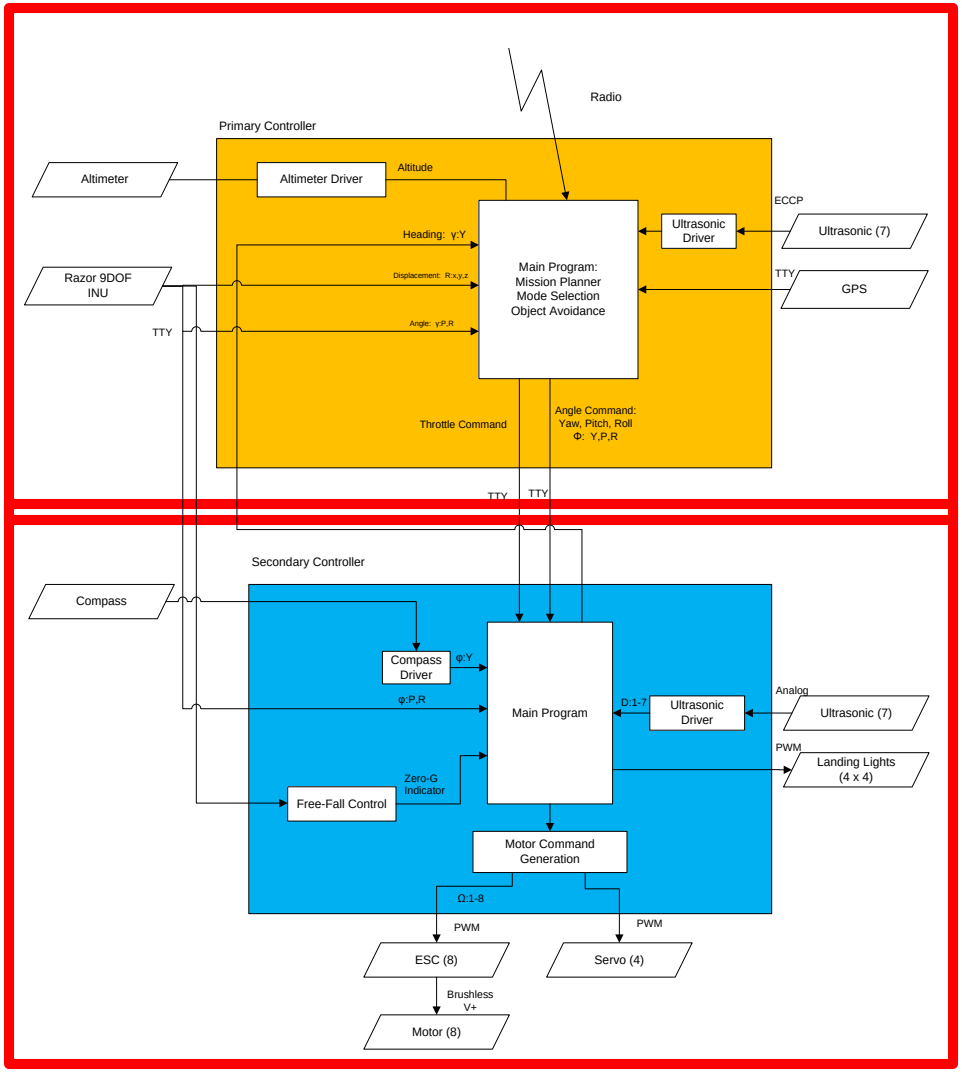

Vehicle Specifications

- Sensors: 3-Axis Accelerometer, 3-Axis Gyroscope, 3-Axis Magnetometer (INU), Digital Compass, Altimeter, GPS, 7 Ultrasonic Sensors
- Power: 8 Brushless DC 200 Watt Motors, 4 Micro Servo's, 2 Lithium-Ion 11.1V 5 Amp-Hours Batteries, 4 18A Electronic Speed Controllers, 5V and 3.3V Linear Voltage Regulators.
- Control: SoM Controller (Primary), Propeller Controller (Secondary), custom PCB.
- Communications: Xbee Radio for Command/Control, Video Transmitter, Wi-Fi (Field programming, tentative).
- Fabrication: ~50% COTS, ~50% produced by MakerBot/Ponoku.

Movement

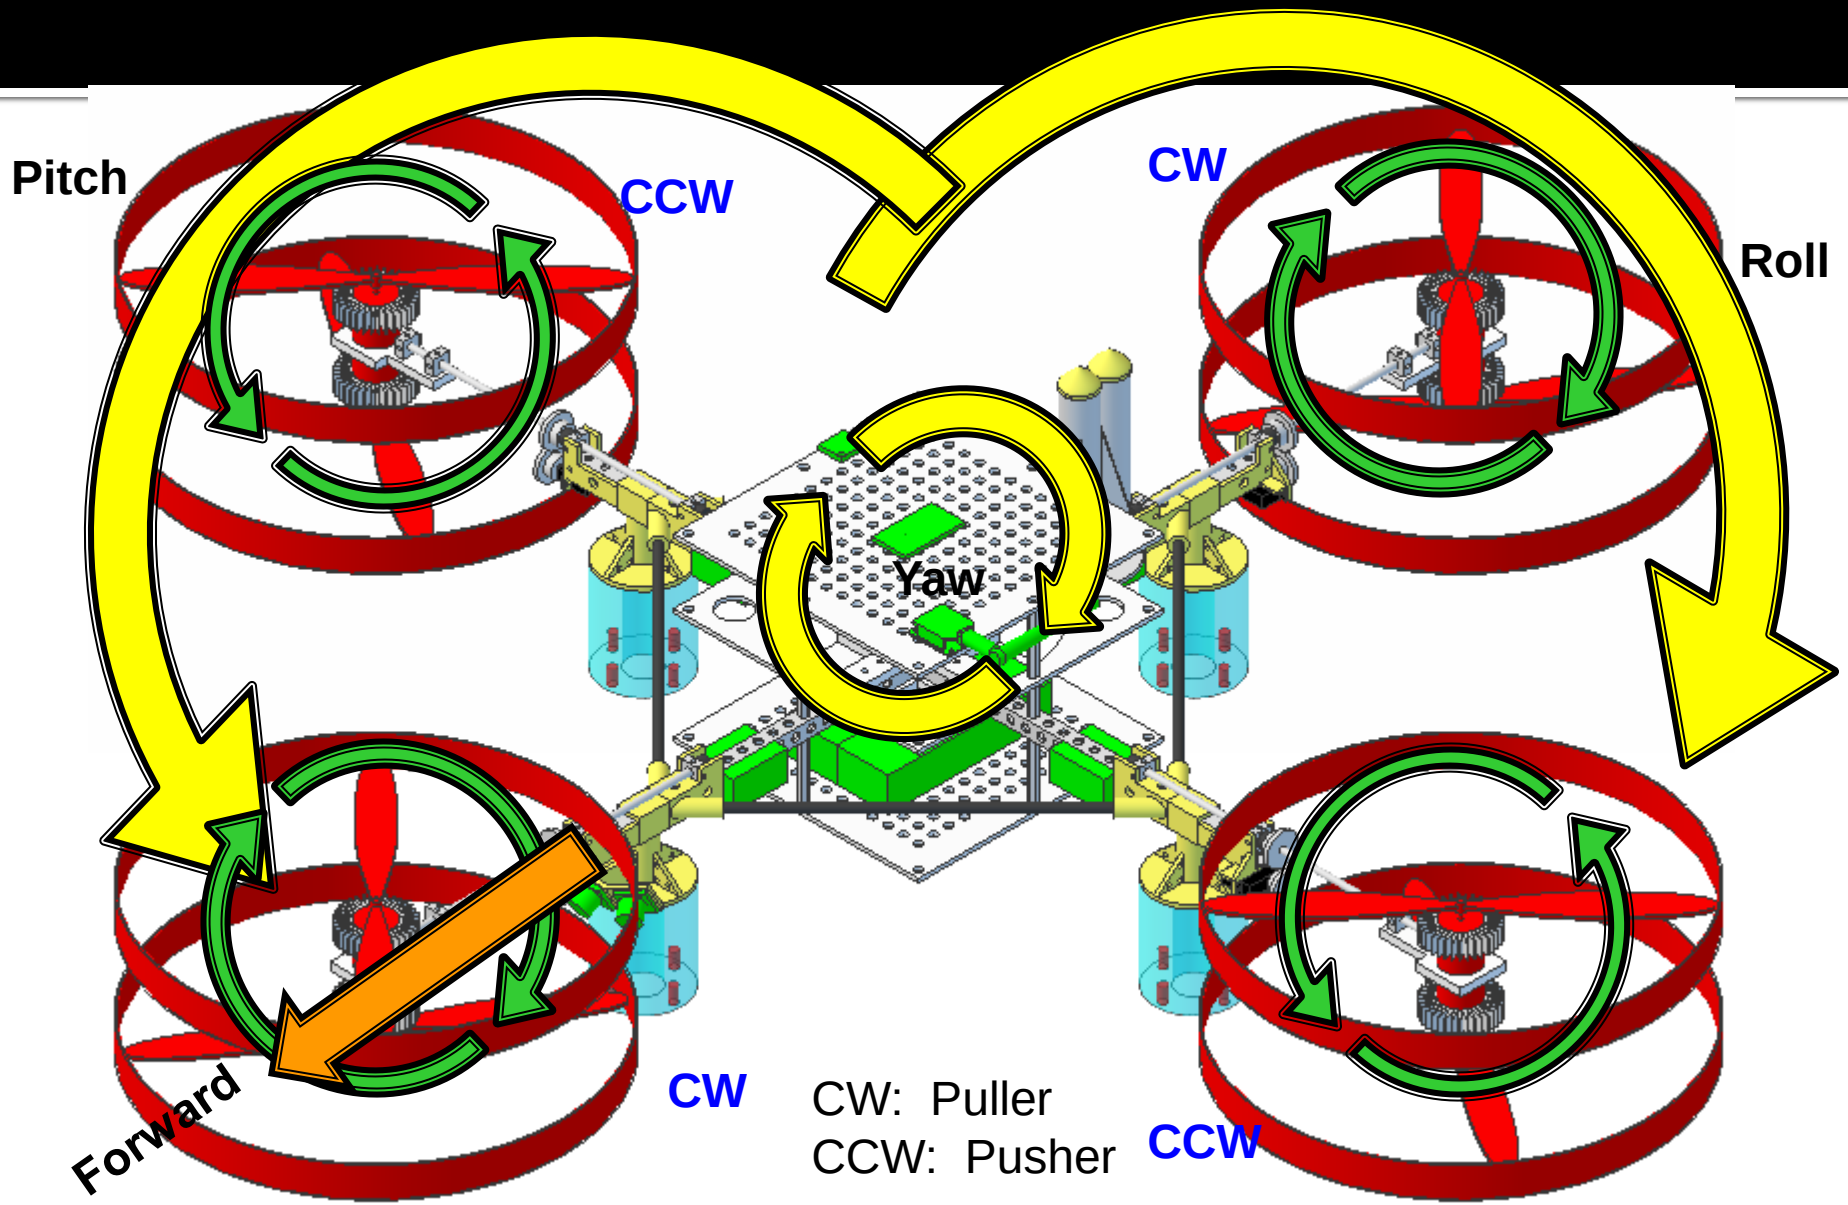

Prototype Systems

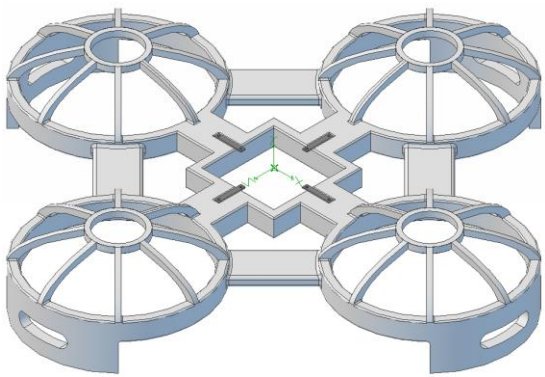

Safety System

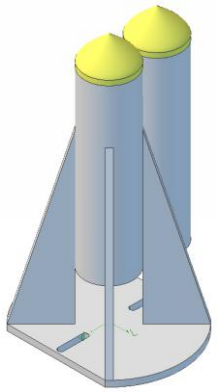

Recovery System

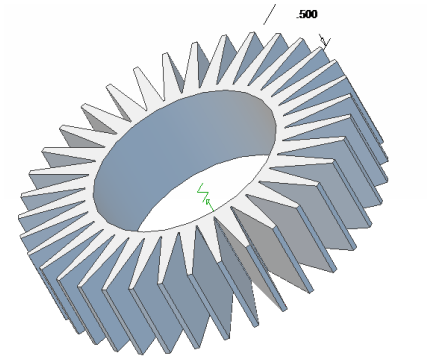

Heat Removal System

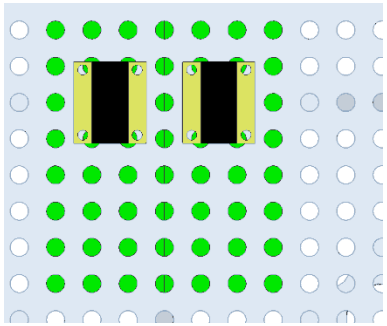

Test-Fixture Attachment System

Vehicle w/ Prototype Systems

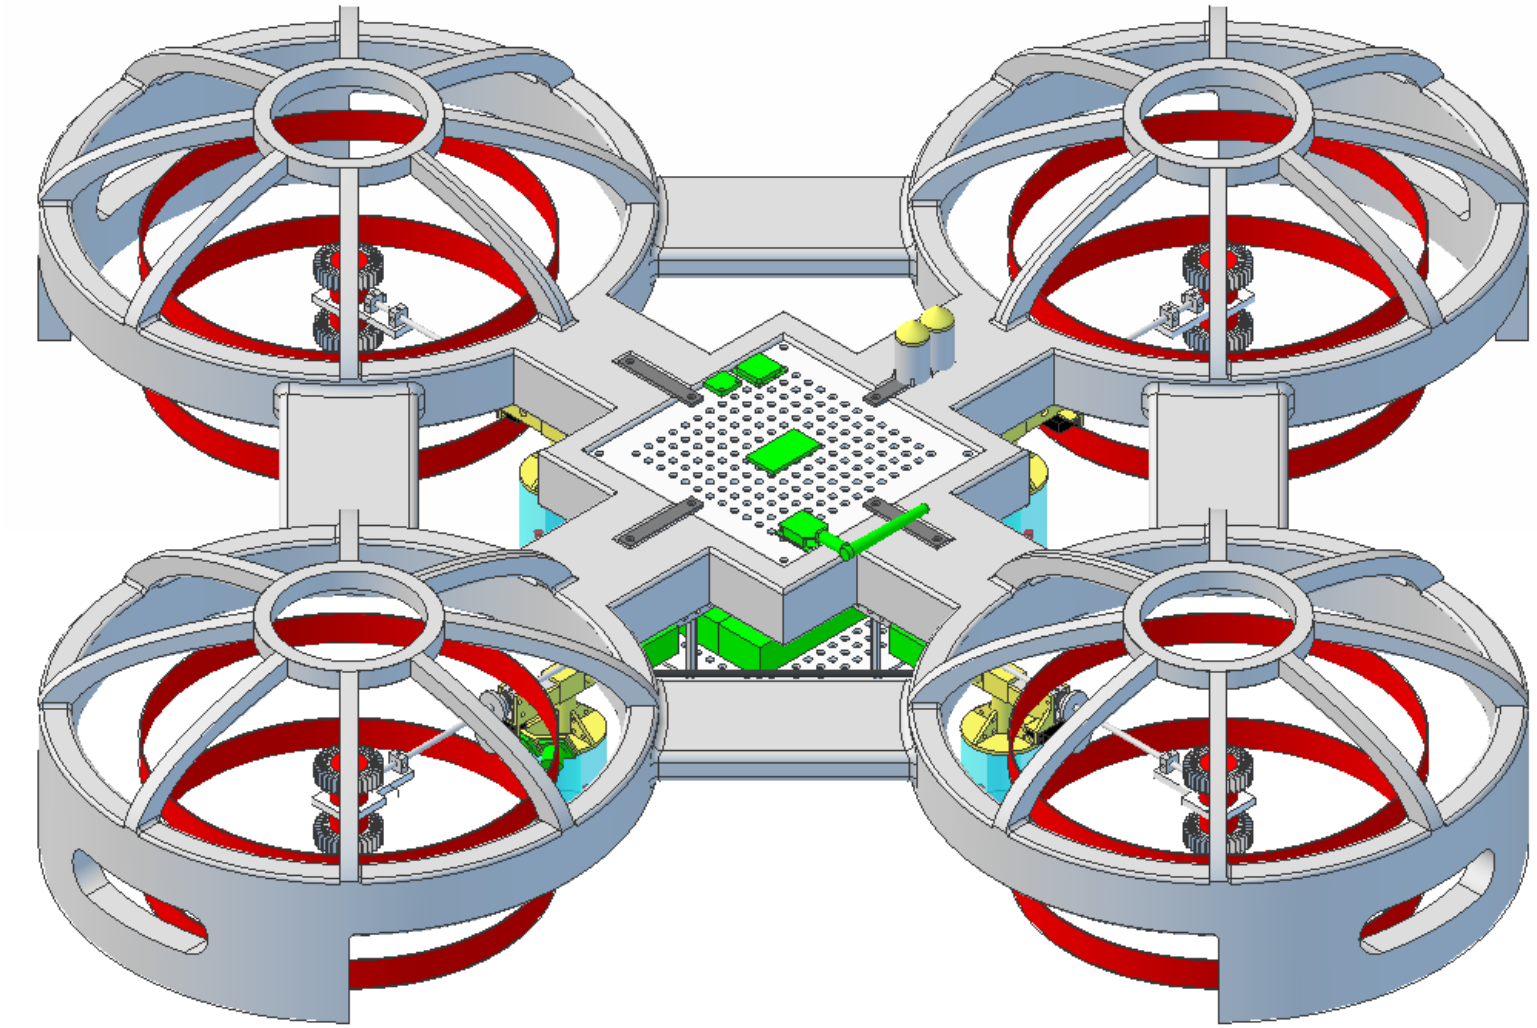

RCU

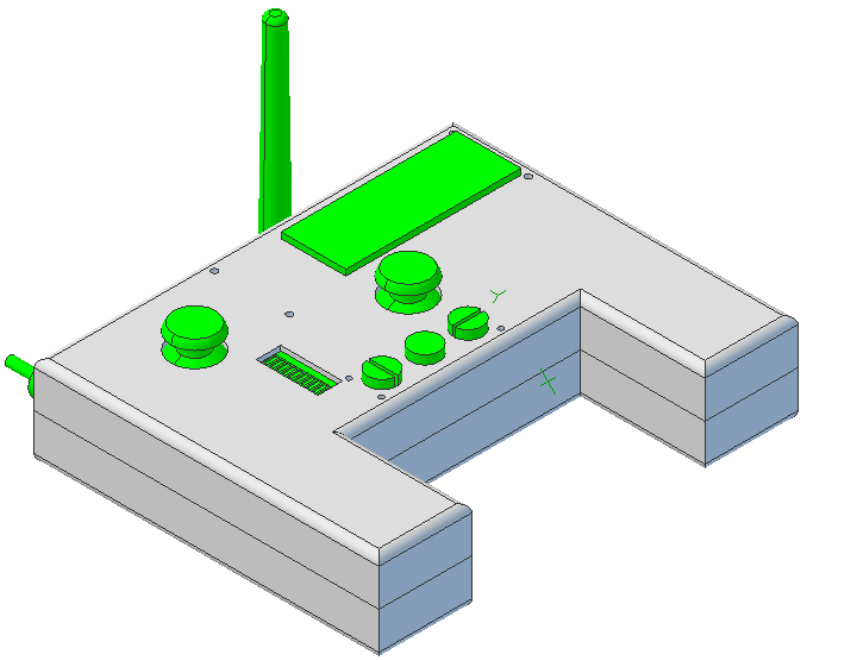

- Custom PCB inside Xbox-360 Controller
- Features Mode and Error Display, Vehicle Battery Indicator, Force-Feedback and 5 hours of continuous operation.

RCU Specifications

- Communications: XBee Radio for Command/Control
- Input/Output: 9 Switches/Buttons, 2 Dual-Axis Joysticks, GPS Sensor, 10-Segment LED, LCD Screen, Vibrating Motors.
- Power: 2 Ni-Mh AA Batteries, 3.3 and 5V Boost Converters.

GCS

- Includes computer, touch-screen monitor and batteries for field operation.
- Communications Radio and Video Receiver
- Heavy-duty field transportable case

GCS Interface

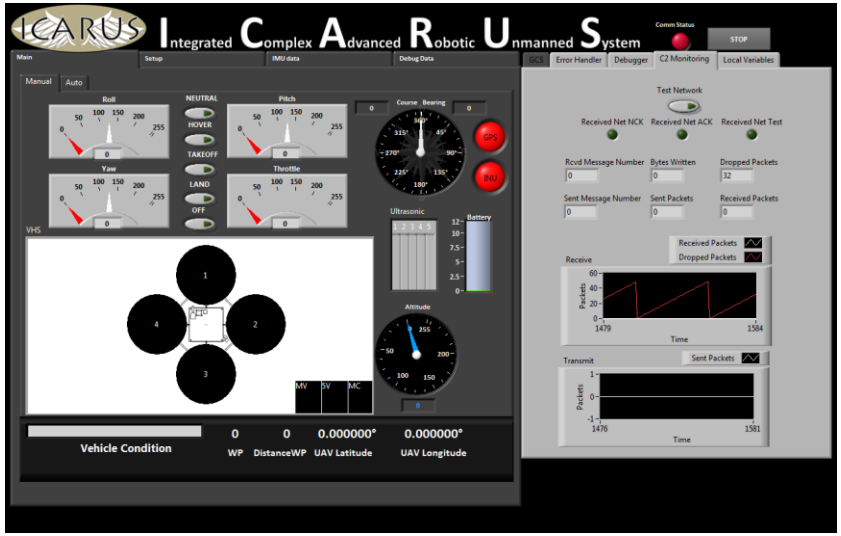

- Manual Control
  - Vehicle Sensor Display
  - Vehicle Health/Feedback System
- Autonomous Control
  - Set, Transmit Waypoints
- Communications
  - View Network Status
- Configuration/Debugging

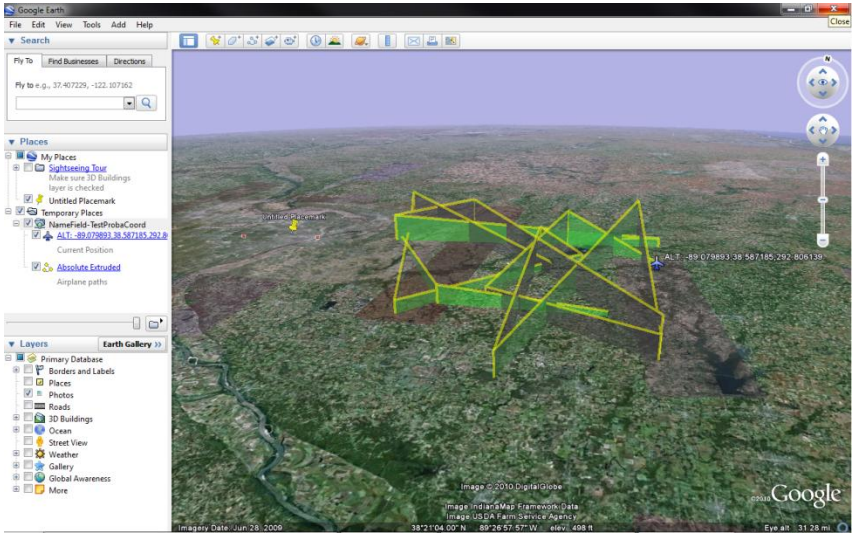

- Google Earth Integration
  - Fully controllable Google Earth (location search, zoom, pan, etc).
- View Waypoints and Vehicle Location/Path

GCS Specifications

- Software: National Instruments LabView integrated with Google Earth mapping software.
- Power: 2 12V 26Amp-Hour Batteries, 120V AC Power Inverter, Vehicle battery fast charger.
- Communications: XBee Radio for Command/Control, Video Receiver

Test-Stand

- Used for Vehicle Calibration and Capacity measurements
- Able to Pivot vertically, rotate continuously and pitch/yaw/roll on Test-Fixture Assembly
- Power applied to Vehicle via Slip-Ring – No tangled wires

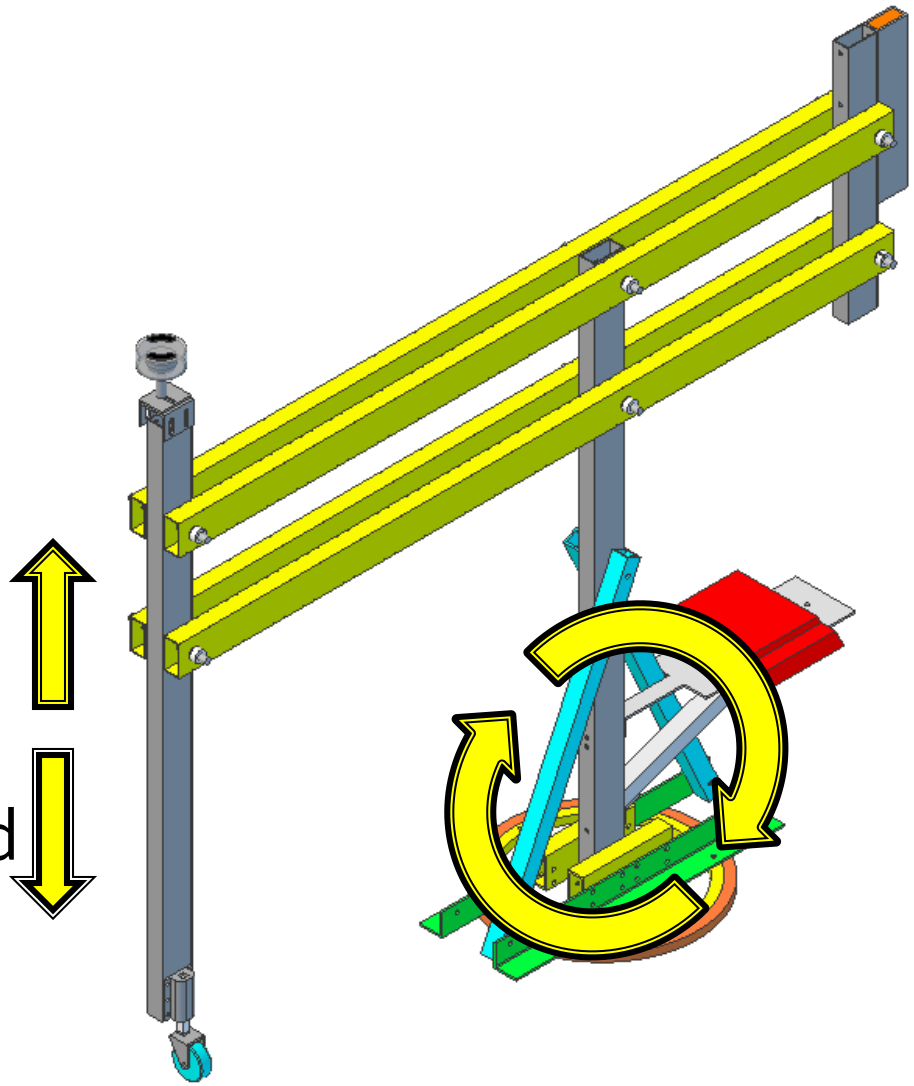

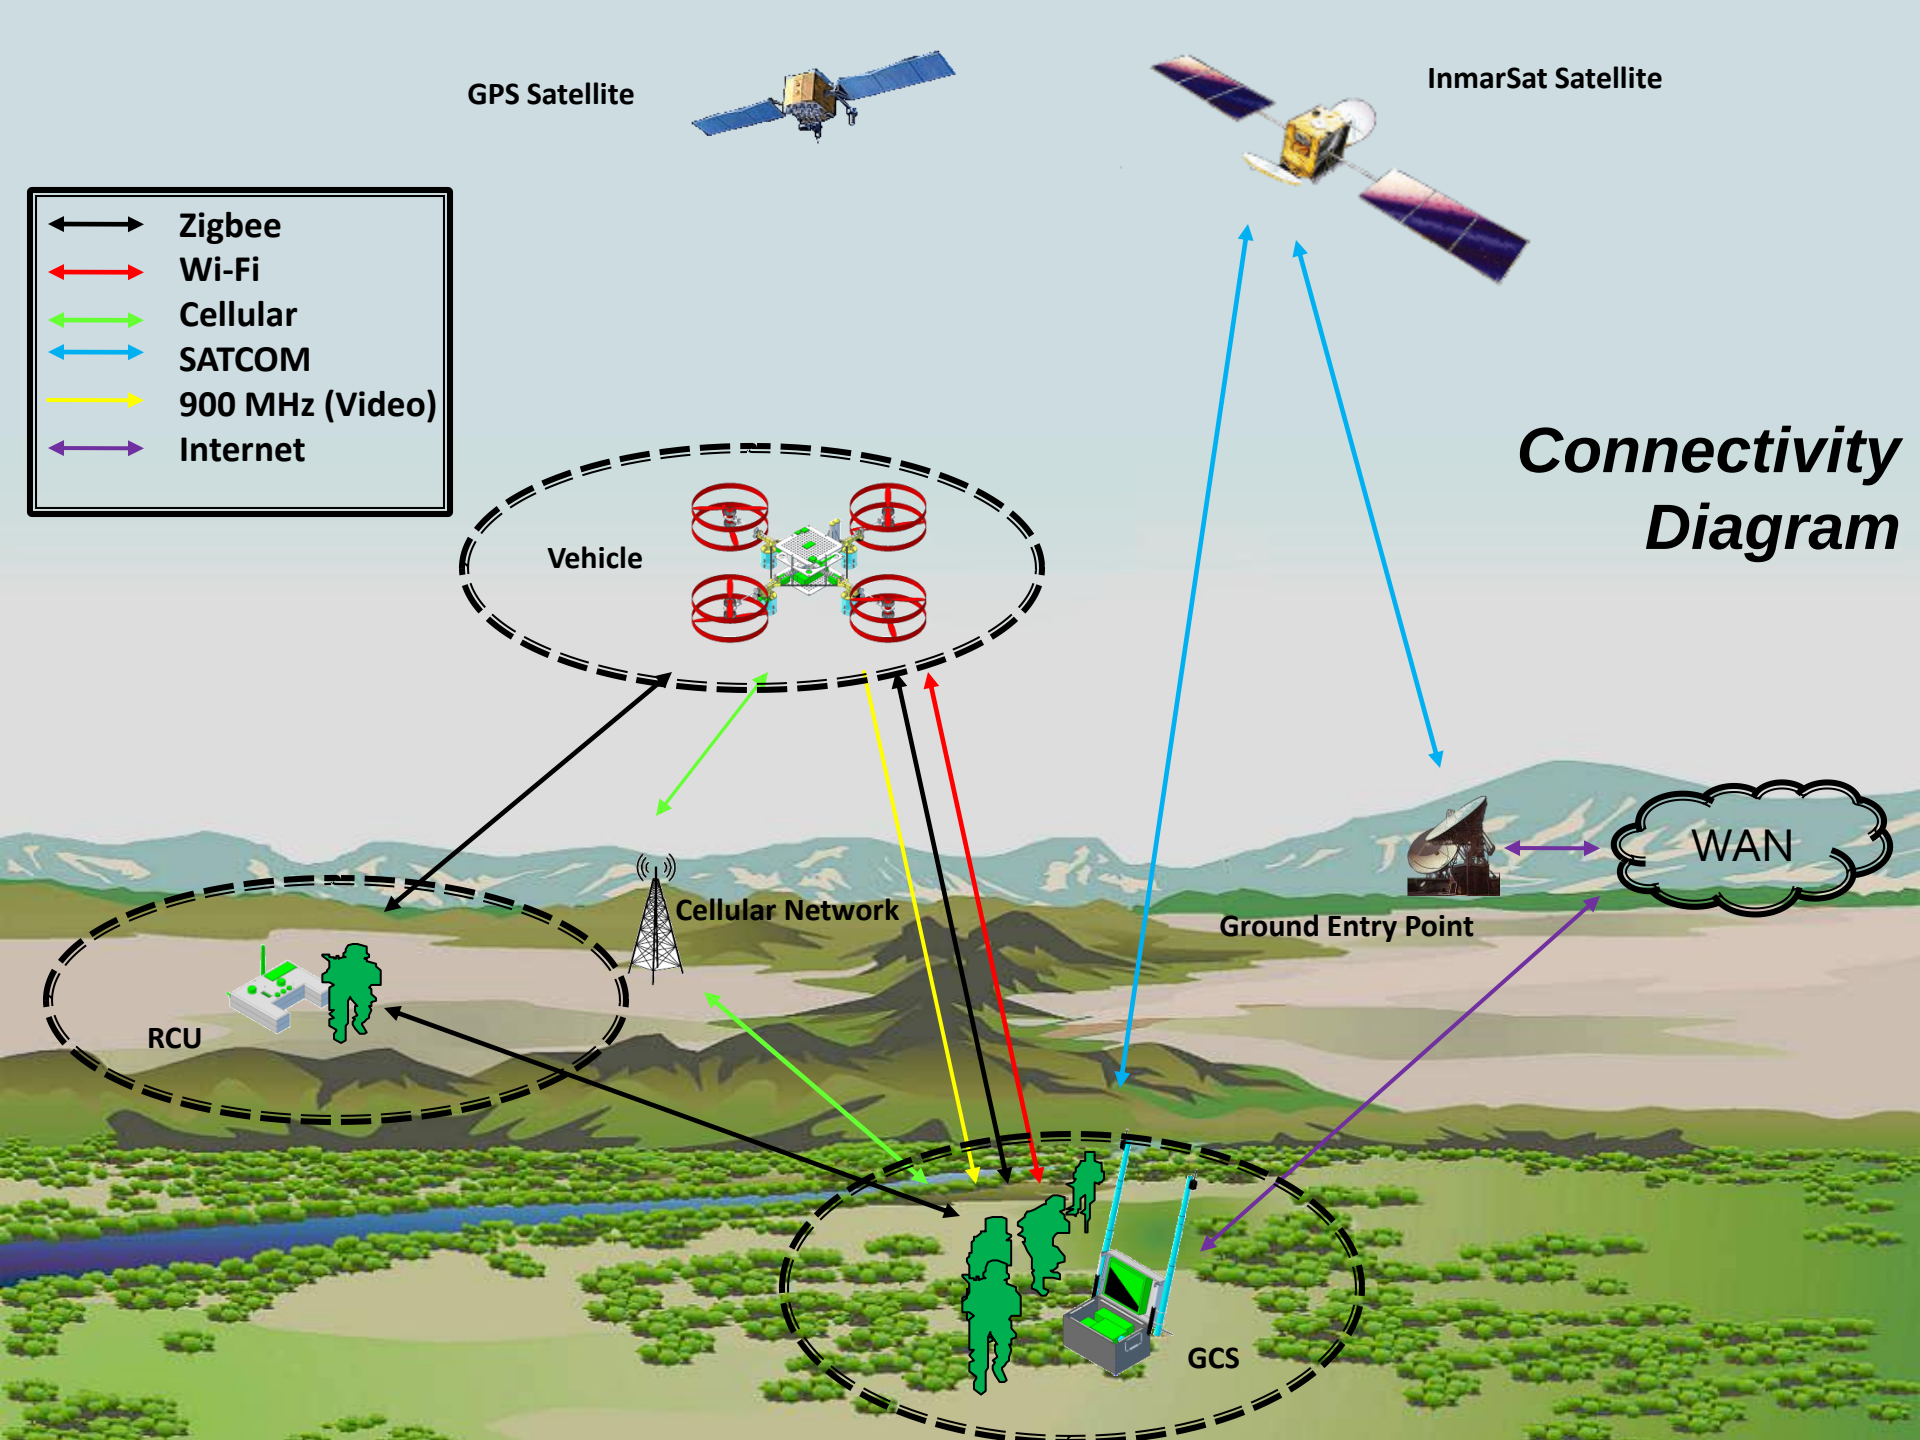
GPS Satellite
InmarSat Satellite
Zigbee
Wi-Fi
Cellular
SATCOM
900 MHz (Video)
Internet
Connectivity Diagram
Vehicle
Cellular Network
WAN
Ground Entry Point
RCU
GCS

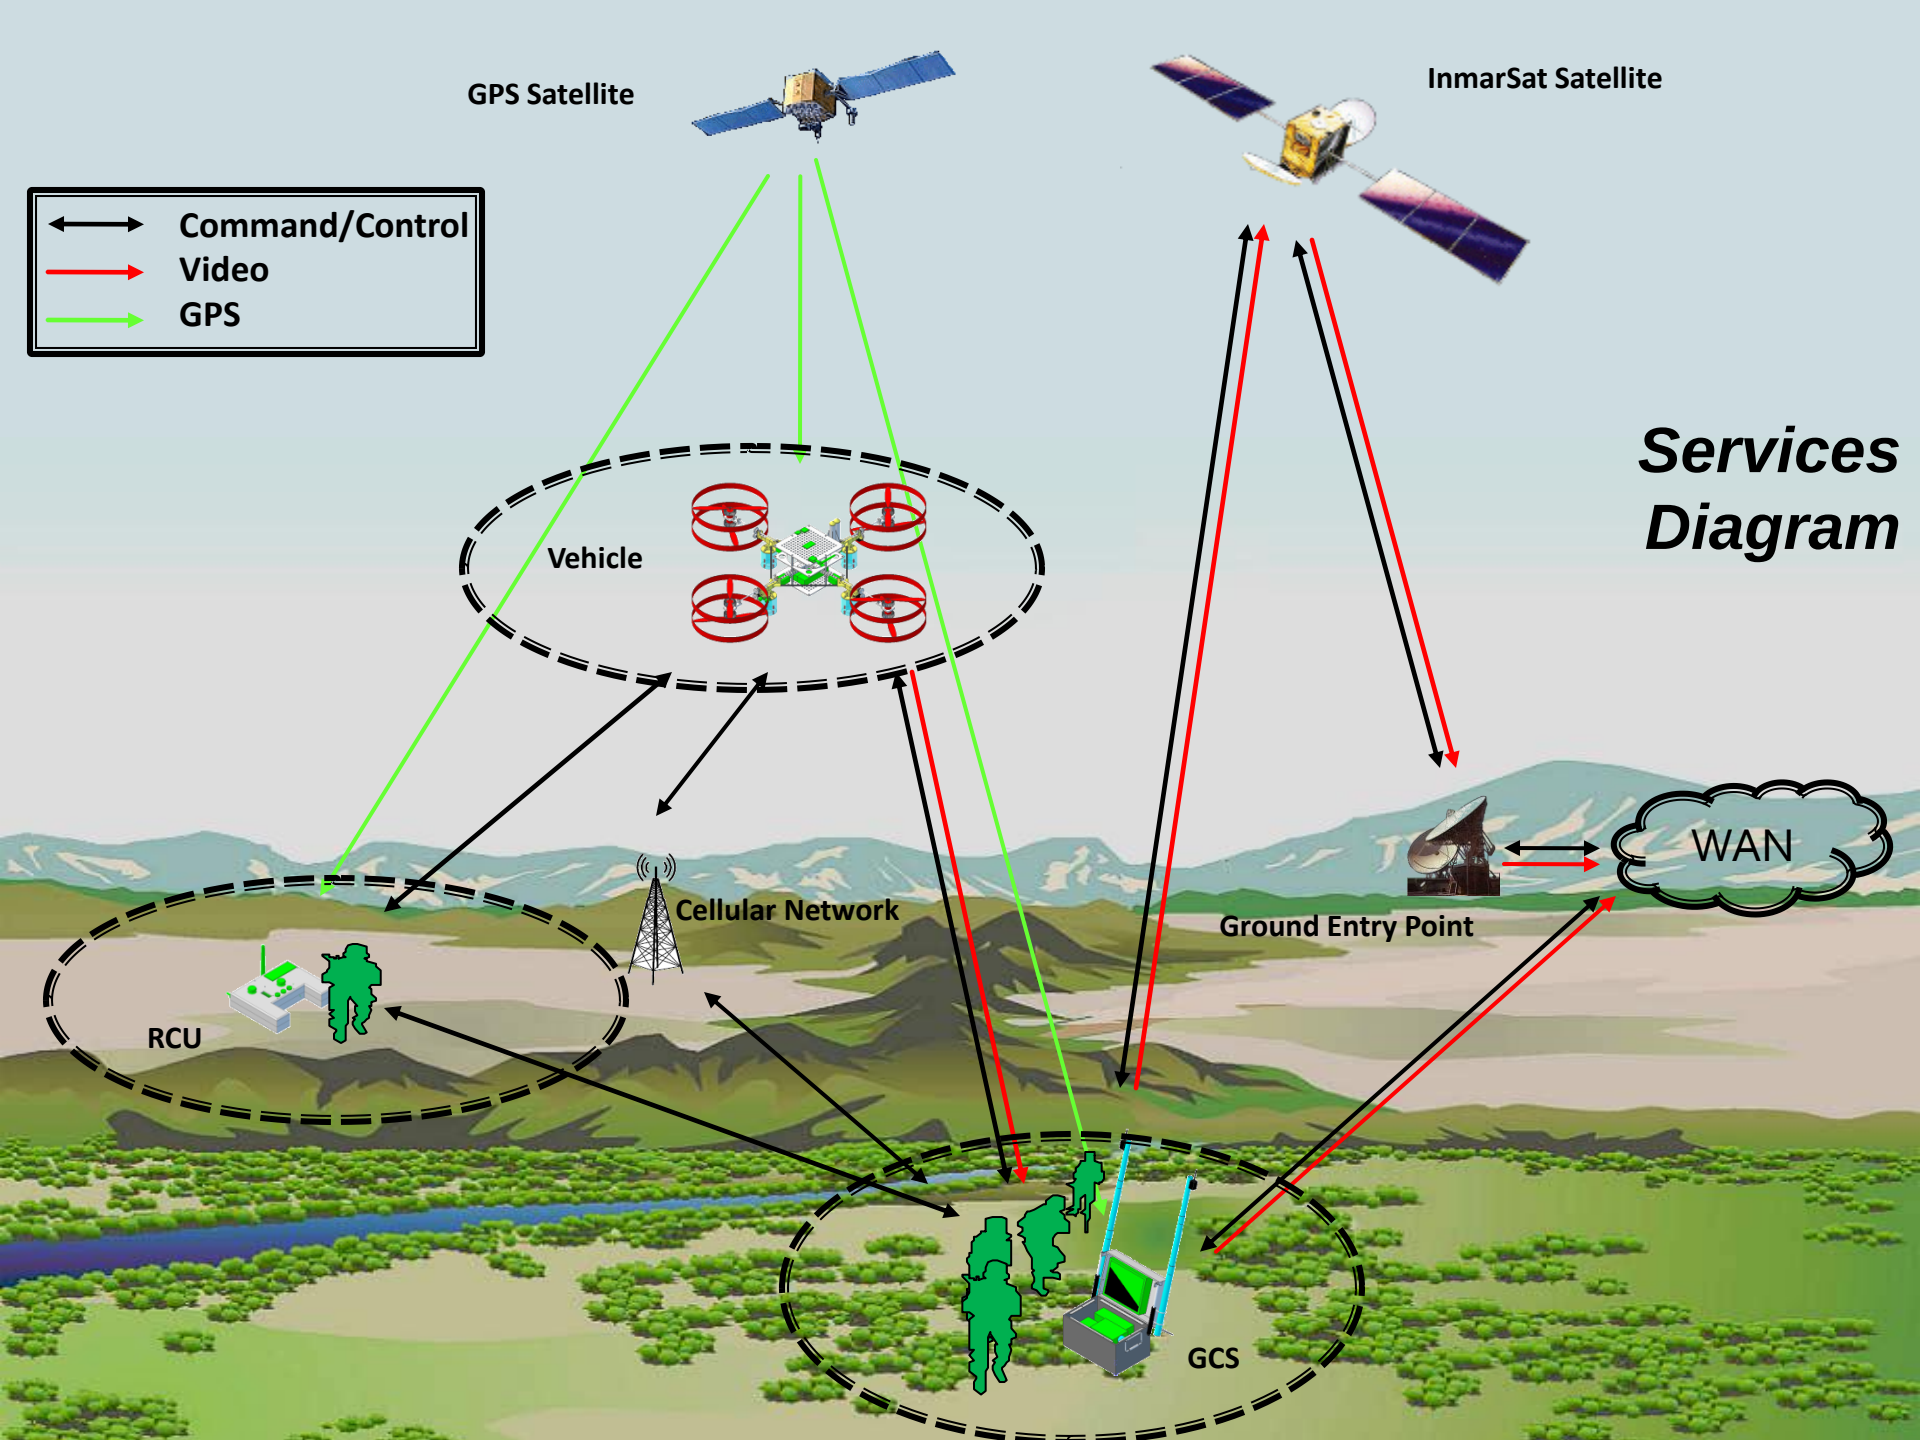
GPS Satellite
InmarSat Satellite
Command/Control
Video
GPS
Services Diagram
Vehicle
Cellular Network
RCU
Ground Entry Point
WAN
GCS

Capabilities

Capabilities - Planned	
Manual Control via RCU or GCS	Simple Calibration and Testing via Test-Stand
Limited Autonomous Navigation via RCU	Error Display on RCU and GCS
Extended Autonomous Navigation via GCS	Force-Feedback on RCU
Automatic Takeoff, Hover and Landing	Vehicle Health Reporting

Capabilities - Future	
Real-Time Video Transmission to GCS	Image Capture
Wireless airborne programming	Advanced Hover modes
Vehicle Status Audio via RCU	Extended Range
Configurable Payloads	Terrain Following
Extended Flight Duration	Obstacle Avoidance
Swarm Autonomy	Vehicle Status - Audio

Technologies

Technologies - Planned	
Command/Control Network Monitoring	Inertial Navigation Unit (INU) w/ Altitude and Heading Reference System (AHRS)
Power Management	Primary/Secondary Controller Implementation
Waypoint Navigation	Communications Protocol
Co-Axial Rotors	Tilt Rotors

Technologies - Future	
3d Feedback	Audio Commands
Automatic Landing Pad	Cellular Network
Cel-Phone Control	Target Detection
Data Storage	GCS Interface (MATLAB)
JAUS Interoperability	Motor Heat Dissipation
R/C Control	RCU Testing Software
Recovery System	Wireless Charging
Satellite Communications	Simultaneous Localization and Mapping (SLAM)

System Specifications

- Range: ~1.5 km LOS (~3km with Xbee Mesh Network)
- Duration:
  - Vehicle: ~12 min (100% Throttle) , ~20 min (Hover)
  - RCU: ~4-6 hrs
  - GCS: ~4-6 hrs (including field charging Vehicle)
- Speed: ~2 - 4 kph
- Weight: ~5.5 lbs
- Size: 48" x 48" x 10.5"
- Propeller Rotation: Max: 3,000 RPM
- Vertical Thrust: ~7.8 lbs

Questions?

- Contact:
  - David Gitz: david.gitz@icarusuav.com
  - Ben Wasson: ben.wasson@icarusuav.com